



Slido Classic 40-P to 120-P

- Door weight: 40 – 120 kg (88 – 264 lbs.) per door
- For 1 and 2 sliding wood doors
- Door height adjustable ± 5 mm (3/16")
- Suspension fitting with screw-mounted support flange


SLIDING

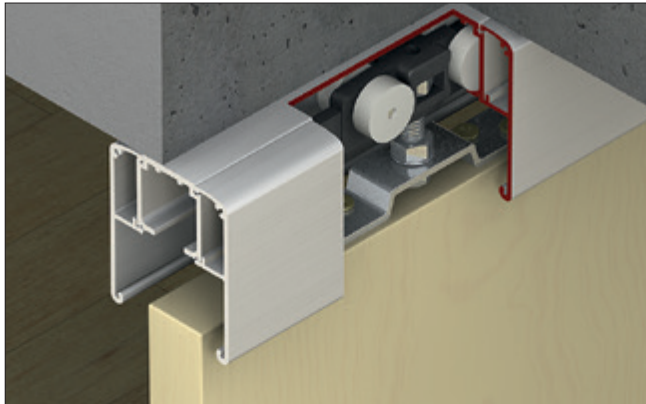

Ceiling installation and wall mounting

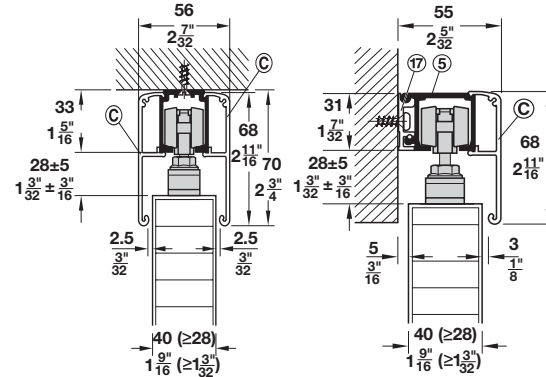

Rattle-free floor guide

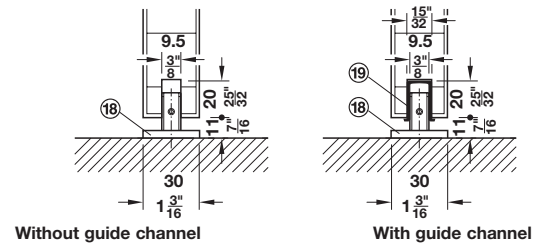

Slido Classic P Set

- For 1 sliding door without upper track

Soft Close	Version	Door width	40-P 40 kg (88 lbs.)	60-P 60 kg (132 lbs.)	80-P 80 kg (176 lbs.)	120-P 120 kg (264 lbs.)
Without	A	–	940.42.113	940.60.113	940.82.108	941.02.119
On one side	B	≥ 592 mm (23 5/16")	940.43.115	–	940.82.562	941.02.114
On both sides	C	≥ 727 – 846 mm (28 5/8 – 33 5/16") recommended max. width	940.43.116	–	940.82.125	–
	D	≥ 847 – 966 mm (33 3/8 – 38 1/16") recommended max. width	940.43.117	–	940.82.563	–
	E	≥ 916 mm (36")	940.43.118	–	940.82.564	941.02.115


Note

End cap for ceiling installation with fascia on both sides is not available. One pair of end caps can be glued vertically in the center of the upper track (optional). Please order track, fascias and accessories separately. For bi-parting sliding doors, please order 2 sets per opening.

Sliding door locks	pages 1.357, 1.364-1.368
Flush pulls	pages 1.363, 1.371-1.373
Pull handles	pages 2.10-2.32
Tracks, fascias and accessories	pages 1.16-1.17
Track stopper	page 1.8
Track cleaner	page 1.37

Dimensions in mm
Inches are approximate


Slido Classic 40-P to 120-P

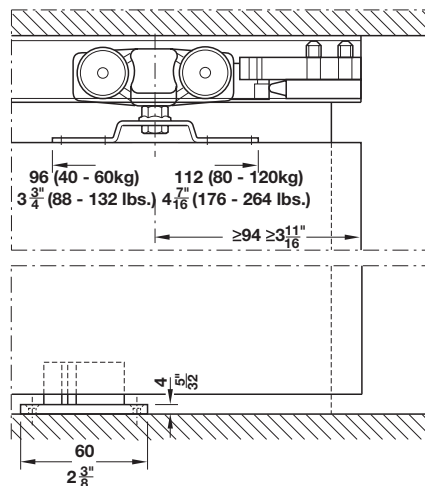


Section guide and trolley hanger

Versions overview

Version A without soft close

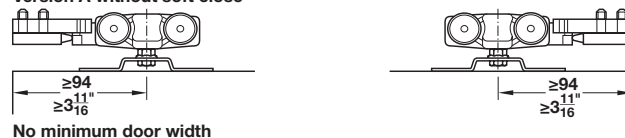


Version B with soft close on one side

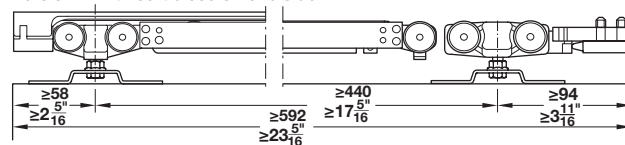


Minimum door width is 592 mm (23 5/16").

Version C with soft close on both sides (twin mechanism)

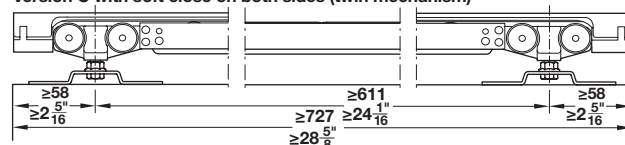


For doors 727-846 mm (28 5/8"-33 5/16").

Version D with soft close on both sides (double mechanism)

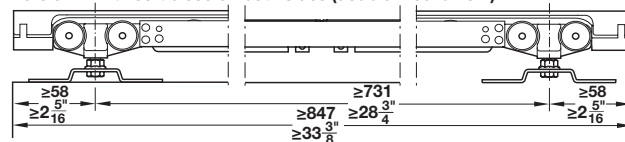

For doors 847-966 mm (33 3/8"-38").





Version E with two soft close (one for each side)

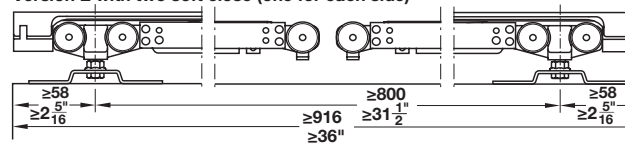


Minimum door width 916 mm (36").

Set Components for Slido Classic 40-P to 80-P





Slido Classic 40-P

	Description	Material	Finish	For Version	Qty.	Item No.
	Running gear, suspension screw with nut, support flange for screw mounting, without soft close	Steel	galvanized	A	2 pcs.	940.42.013
				B	1 pc.	
	Running gear, suspension screw with nut, support flange for screw mounting, soft close on one side	Steel	galvanized	B	1 pc.	940.42.017
				E	2 pcs.	
	Running gear, suspension screws with nut, support flanges for screw mounting, soft close on both sides (twin mechanism)	Steel	galvanized	C	1 pc.	940.43.012
	Running gear, suspension screws with nut, support flanges for screw mounting, soft close on both sides (double mechanism)	Steel	galvanized	D	1 pc.	940.42.016




Slido Classic 60-P

	Description	Material	Finish	Qty.	Item No.
	Running gear, suspension screw with nut, support flange for screw mounting, without soft close	Steel	galvanized	2 pcs.	940.60.016

Slido Classic 80-P

	Description	Material	Finish	For Version	Qty.	Item No.
	Running gear, suspension screw with nut, support flange for screw mounting, without soft close	Steel	galvanized	A	2 pcs.	940.82.012
				B	1 pc.	
	Running gear, suspension screw with nut, support flange for screw mounting, soft close on one side	Steel	galvanized	B	1 pc.	940.82.018
				E	2 pcs.	
	Running gear, suspension screws with nut, support flanges for screw mounting, soft close on both sides (twin mechanism)	Steel	galvanized	C	1 pc.	940.82.019
	Running gear, suspension screws with nut, support flanges for screw mounting, soft close on both sides (double mechanism)	Steel	galvanized	D	1 pc.	940.82.015

Slido Classic 40-P to 120-P Components

	Description	Material	Finish	For Version	Qty.	Item No.
	Floor guide, rattle-free	Plastic	black	A, B, C, D, E	1 pc.	940.42.030
	Track stopper with retaining spring and rubber bumper	Plastic	gray	A for 40 – 60 kg (88 - 132 lbs.)	2 pcs.	940.42.040
				B for 40 – 60 kg (88 - 132 lbs.)	1 pc.	
				A for 80 – 120 kg (176 - 264 lbs.)	2 pcs.	940.42.041
				B for 80 – 120 kg (176 - 264 lbs.)	1 pc.	
	Release device with stopper	Steel	galvanized	B for 40 and 80 kg (88 - 176 lbs.)	1 pc.	940.42.042
				C, D, E for 40 and 80 kg (88 - 176 lbs.)	2 pcs.	
				B for 120 kg (264 lbs.)	1 pc.	940.42.082
				E for 120 kg (264 lbs.)	2 pcs.	