


## HAWA Ordena 70/F

- Maximum door weight: 70 kg (154 lbs.)
- Maximum door height: 2600 mm (8' 6 3/8")
- Minimum door width: 600 mm (1' 11 5/8")
- Door thickness:
  - Wood: 30 – 40 mm (1 3/16" – 1 19/32")
  - Tempered glass: 8 – 10 mm (5/16" – 13/32")
  - Laminated glass: \*8.7 – 10.7 mm (5/16" – 13/32")
  - \*Maximum offset: 2 mm (3/32")
- Height adjustable: +/- 3 mm (1/8")
- Top running sliding system that is impervious to dust and dirt
- Allows wood and glass sliding door combinations
- Lower guide channel is only 4.5 mm high; it is clipped or glued on
- Wider doors are guided securely with two spring-loaded lower guides
- Center stops hold sliding doors in correct closed position
- Frameless and easy to install
- Glass door use HAWA Junior GP suspension

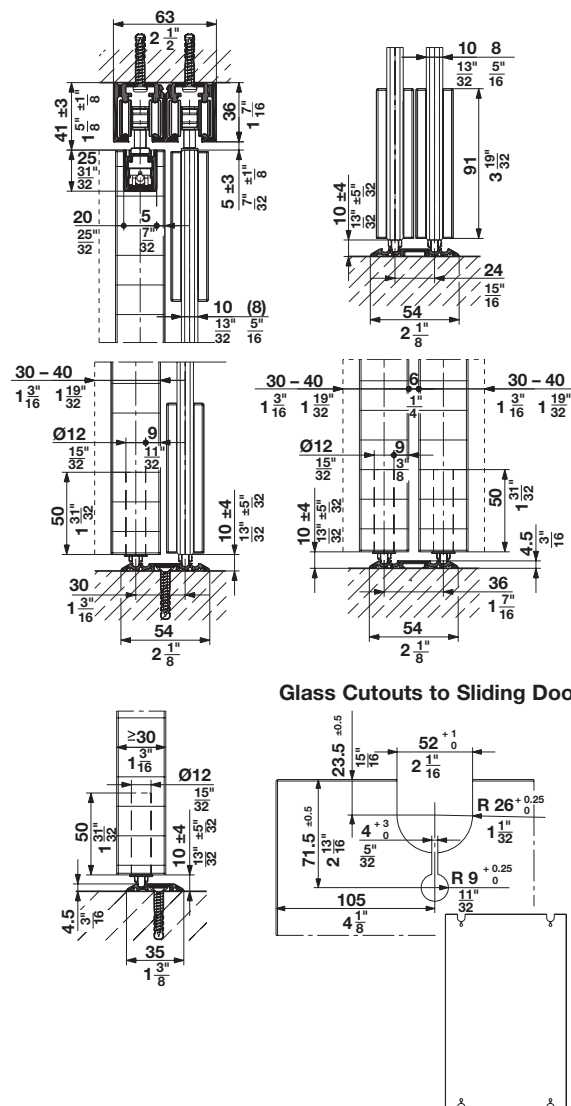

## Set

Version	Item No.
For 1 wood door	404.95.001
For 1 glass door	404.95.011

## Set Components

	Description	Finish	Qty. for 1 wood door	Qty. for 1 glass door
	Running gear, four plastic-coated ball bearing wheels	–	2 pcs.	2 pcs.
	Carrier profile with M7 suspension bolt	–	2 pcs.	–
	Cover caps, 20 x 25 mm (3/16" x 31/32")	gray	2 pcs.	–
	Patch suspension	–	–	2 pcs.
	Suspension bolt, M7, including mounting screws	–	–	1 pc.
	Hex Key, 4 mm (5/32")	–	1 pc.	–

Dimensions in mm  
Inches are approximate

## HAWA Ordena 70/F

### Individual Components

#### Order Specifications


- Type and quantity of fitting sets
- Type and quantity of door stop sets
- Type and quantity of lower guides
- Length of dual upper track
- Length of lower guide channel
- For glass doors
  - Type and quantity of cover plates
  - Length of rubber profile for glass protection
  - Quantity of centering elements for wall connection

## Door Stop Sets

Material: Plastic


For opening with	Item No.
2 doors	404.95.308
3 doors	404.95.311
4 doors	404.95.312
5 doors	404.95.313
6 doors	404.95.314

**Supplied With**  
Center stops
















#### Wall Centering Element

The ideal wall connection for all glass sliding doors with unprotected glass edges.



#### Rubber Profile for Glass Edge Protection

Self-adhesive rubber profile is recommended for glass doors that can strike against one another.

Description	Material	Finish	Length	Item No.
	Aluminum	anodized	2.5 m (8' 2 7/16")	940.40.825
			3.5 m (11' 5 13/16")	940.40.835
	Aluminum	anodized	2.5 m (8' 2 7/16")	940.40.826
			3.5 m (11' 5 13/16")	940.40.836
	Aluminum	anodized	2.5 m (8' 2 7/16")	940.41.725
			3.5 m (11' 5 13/16")	940.41.735
	Aluminum	anodized	2.5 m (8' 2 7/16")	940.41.726
			3.5 m (11' 5 13/16")	940.41.736
	–	–	–	404.97.990
	–	–	–	404.95.916
	–	–	–	404.95.915
	Plastic	chrome, matt	1 set (4 pcs.)	940.40.027
		brass polished	1 set (4 pcs.)	940.40.028
		stainless steel effect	1 set (4 pcs.)	940.40.023
		chrome polished	1 set (4 pcs.)	940.41.029
	Plastic	chrome, matt	1 set (4 pcs.)	940.41.028
		stainless steel effect	1 set (4 pcs.)	940.41.027
	Plastic	unfinished	1 pc.	940.41.023
	Plastic	unfinished	1 pc.	940.41.024
	Rubber	black	1 roll (5 m)	404.95.321
	Plastic	gray	1 pc.	941.24.042

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm  
Inches are approximate