


6

HÄFELE

CASTERS, FEET, LEGS, TABLE FITTINGS



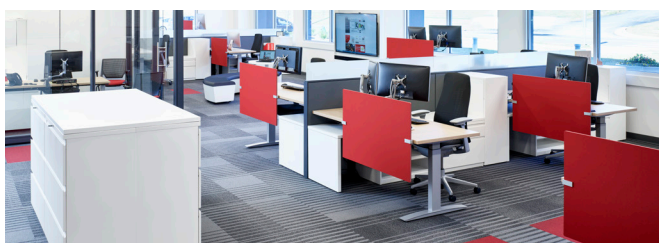

Casters

Light Duty	6.3, 6.6
Heavy Duty	6.4, 6.6
Medium Duty	6.5, 6.7
Swiveling	6.8–6.9
Fixed	6.9
Roller-Mini	6.10
Coal Box/Bed Box/Ball	6.11

Furniture Feet

Metal Furniture Feet	6.12, 6.14
Garage Feet	6.13
Height Adjustable	6.14
Equipment Feet	6.15
Häfele AXILO™ Plinth System	6.16–6.20
Base Cabinet Feet	6.21–6.27

Table Legs

Mini Legs	6.28
E-Legs	6.29–6.36
Square Legs	6.37
Single Column Support Legs	6.37
H-Legs	6.38
U-Leg	6.39
Folding Table Legs	6.40–6.41
Stainless Steel Legs/Fixed Column	6.42–6.43
Pull-Out Table Fitting with Legs	6.44

STAR Adjustable Table Bases

2-Leg System	6.45
3-Leg System	6.46
Single Column Side-Mount System	6.47
Double Column Side-Mount System	6.48

Furniture Glides/Levelers

Glides	6.49–6.51
Levelers	6.52–6.56
Leveler/Caster Combo	6.57
U-Brackets	6.58
M10 Brackets	6.59

Table Fittings

Tabletop Swivel Fitting	6.60–6.61
Tavoflex Top Lift-Up Fitting	6.62
Table Connectors	6.63–6.64
Folding Table Fittings	6.65–6.66
Countertop Lift	6.67
Drop-Leaf Fitting	6.68
Leg Fittings	6.69
Table Catches	6.70

Accessories

Modesty Panel Bracket	6.70
Turntables	6.71–6.72

Casters

Caster Features



With or
without brake



Nylon hood
and wheel




Hard wheel surface




Wheel diameter
40 or 50 mm
(1 9/16" or 1 31/32")

- > For light duty applications
- > Well-spaced wheels for exceptionally smooth running action
- > Hard, abrasion-proof surface is particularly suitable for soft floor coverings such as carpets
- > Weight capacity/caster: 35 kg (77 lbs.)

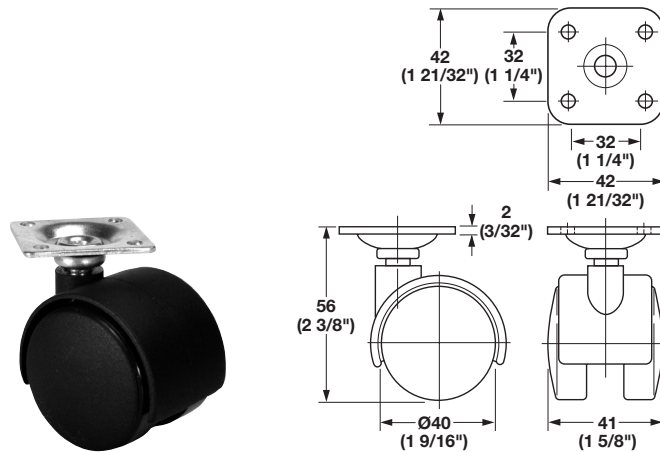


- > With mounting plate
- > Wheel Ø: 40 mm (1 9/16")
- > Material: Nylon/Steel; Finish: black matte

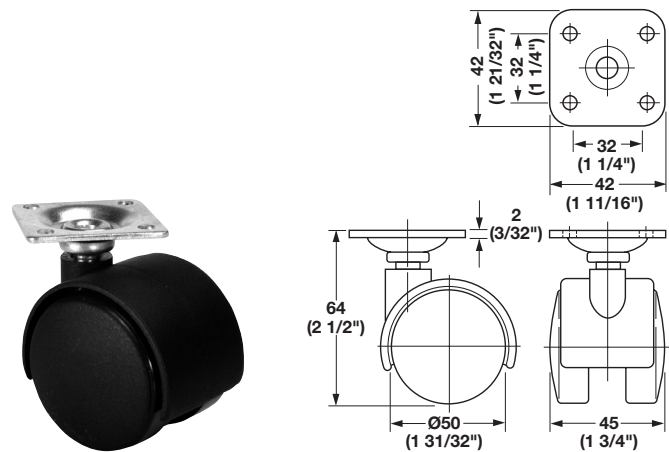

- > With mounting plate
- > Wheel Ø: 50 mm (1 31/32")
- > Material: Nylon/Steel; Finish: black matte

Version	Item No.
without brake	660.04.331
with brake	660.05.331

Version	Item No.
without brake	660.04.351
with brake	660.05.351

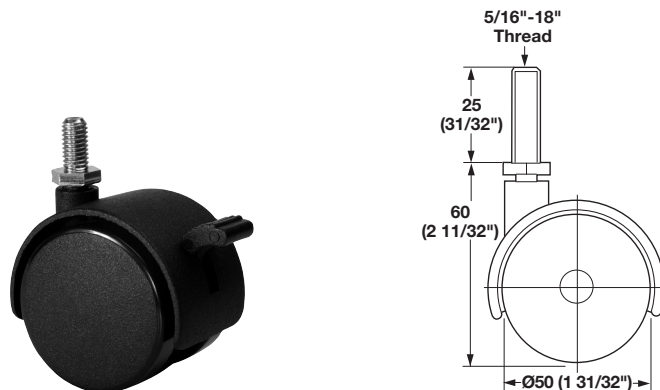

- > With threaded stem
- > Thread: 5/16"-18"
- > Wheel Ø: 50 mm (1 31/32")
- > Material: Nylon/Steel; Finish: black matte


Version	Item No.
without brake	660.04.353
with brake	660.05.353

Note

Threaded inserts and brackets required.

Casters

- > Use wherever maximum stability and strength are required
- > Suitable for soft and hard flooring surfaces
- > Material: Nylon/Steel; Finish: black

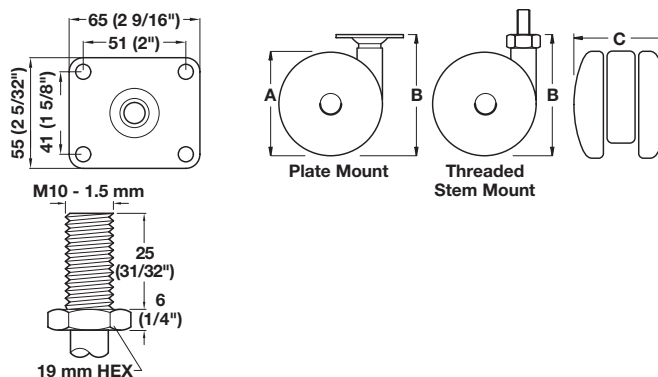

> With brake

Plate mount Ø	A	B	C	Weight capacity	Item No.
76 (3")	73 (2 7/8")	90 (3 17/32")	63 (2 15/32")	80 kg (175 lbs.)	660.58.321
102 (4")	100 (3 15/16")	117 (4 5/8")	74 (2 29/32")	100 kg (220 lbs.)	660.58.341
Threaded stem mount M10					
76 (3")	73 (2 7/8")	85 (3 11/32")	63 (2 15/32")	80 kg (175 lbs.)	660.58.323



> Without brake

Plate mount Ø	A	B	C	Weight capacity	Item No.
76 (3")	73 (2 7/8")	90 (3 17/32")	63 (2 15/32")	80 kg (175 lbs.)	660.57.321
102 (4")	100 (3 15/16")	117 (4 5/8")	74 (2 29/32")	100 kg (220 lbs.)	660.57.341
Threaded stem mount M10					
76 (3")	73 (2 7/8")	85 (3 11/32")	63 (2 15/32")	80 kg (175 lbs.)	660.57.323


Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Casters

- > For light duty applications
- > Non-marring polyurethane wheel
- > Moves with ease on both hard and soft surfaces

Note

Brake can be easily removed if not required.

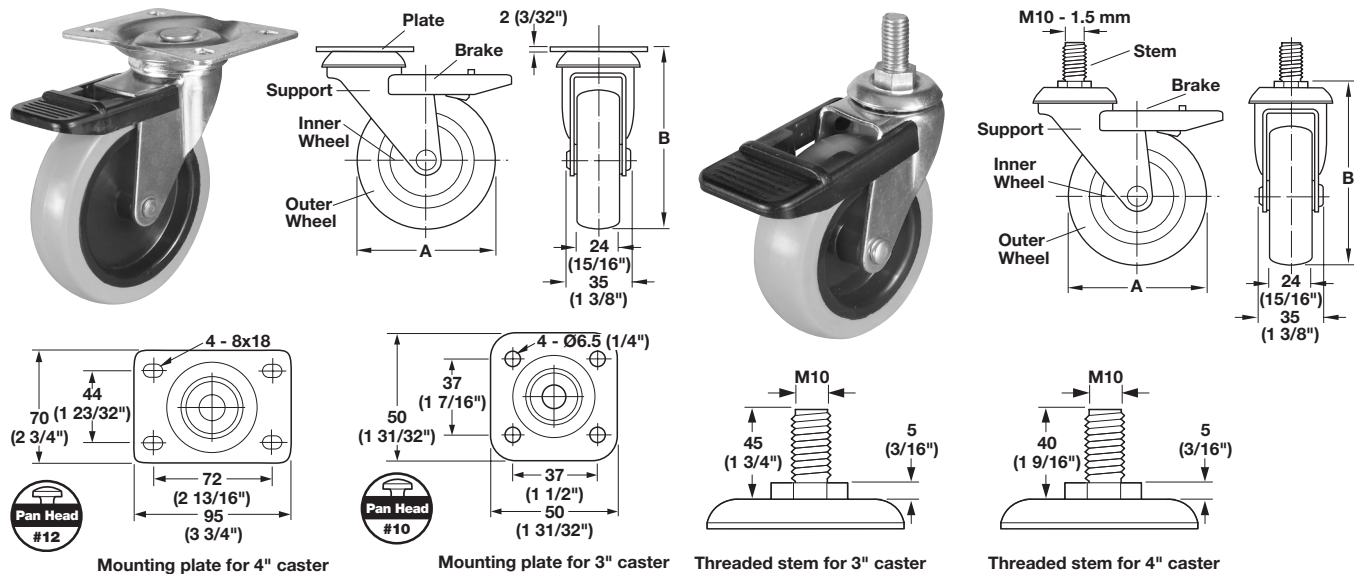


- > With mounting plate
- > Weight capacity: 30 kg (66 lbs.)
- > Material: Outer wheel: PU-Polyurethane; Color: gray
- Inner wheel: Nylon; Color: black
- Support/Plate: Steel

- > With M10 threaded stem
- > Weight capacity: 30 kg (66 lbs.)
- > Material: Outer wheel: PU-Polyurethane; Color: gray
- Inner wheel: Nylon; Color: black
- Support/Stem: Steel

A	B	Item No.
Ø75 (2 15/16")	95 (3 3/4")	663.25.921
Ø100 (3 15/16")	125 (5")	663.25.931

A	B	Item No.
Ø75 (2 15/16")	95 (3 3/4")	663.25.922
Ø100 (3 15/16")	125 (5")	663.25.932

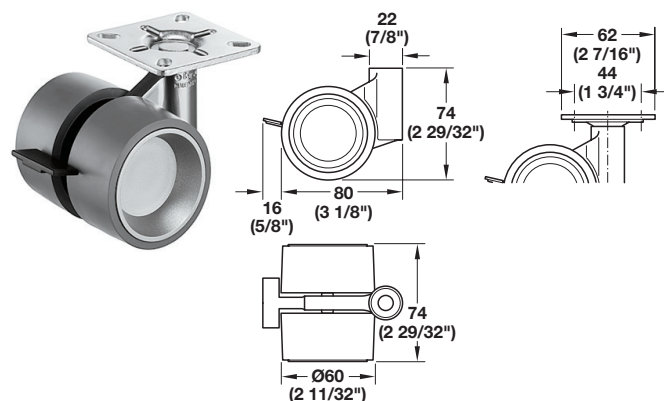

- > Height with mounting plate: 80 mm (3 1/8")
- > Wheel Ø: 60 mm (2 11/32")
- > Weight capacity/caster: 80 kg (176 lbs.)
- > Material: Housing: Zinc; Wheel/Brake: Plastic

Housing/Brake/Wheel	Item No.
silver/black/gray	660.33.911


Supplied With
2 pcs.

Note

Caster is priced/pc. but packed 2 casters/bag. Order 2 casters and you will receive 2 casters. To receive 4 please order 4 casters.


Casters

- > Hard rubber wheel will not mark surfaces
- > Brake locks both pivoting and rotation
- > Swiveling
- > Weight capacity/caster: 50 kg (110 lbs.)

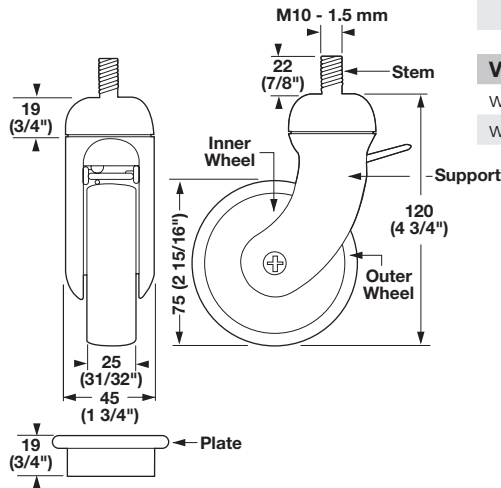

- > With M10 Stem
- > Material: Outer wheel: Hard Rubber
Inner wheel: Plastic; Color: silver
Support: Reinforced Nylon; Color: silver
Threaded stem: Steel

Version	Item No.
without brake	663.22.211
with brake	663.23.211




- > With mounting plate
- > Material: Outer wheel: Hard Rubber
Inner wheel: Plastic; Color: silver
Support/Plate: Reinforced Nylon; Color: silver

Version	Item No.
without brake	663.22.212
with brake	663.23.212

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Swiveling Casters

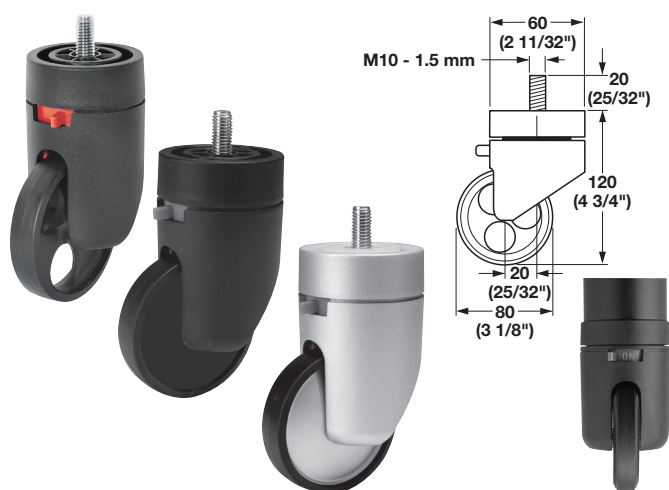


- > With brake and M10 thread
- > Unique locking mechanism secures wheel in both rotation and swivel
- > Rubberized surface on wheel insures a quiet and smooth operation
- > Weight capacity/caster: 120 kg (264 lbs.)
- > Material: Steel; Body: Plastic; Wheel: Rubber

Body/Wheel	Item No.
black/pierced black	661.29.301
black/solid black	661.29.305
silver/silver	661.29.910

Supplied With
4 Casters


6

Casters, Feet, Legs, Table Fittings

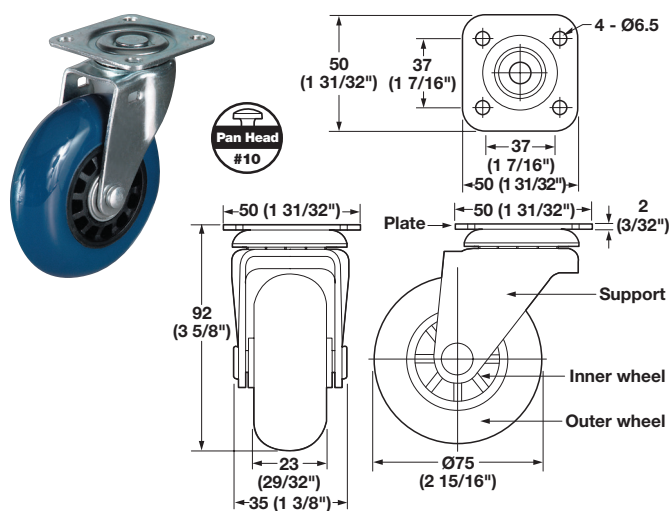

- > With mounting plate
- > Non-marring polyurethane wheel
- > Smooth, quiet running on ball bearing axle
- > Weight capacity/caster: 40 kg (88 lbs.)
- > Material: Outer/Inner wheel: PU-Polyurethane
Support/Plate: Steel; Finish: zinc-plated

Outer wheel	Inner wheel	Item No.
gray	black	663.24.521
blue	black	663.24.821
black	black	663.24.921
transparent	transparent	663.24.721


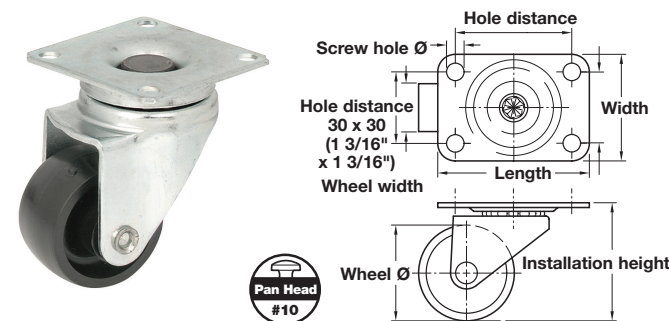


- > With screw-on mounting plate
- > Abrasion-proof wheels run in friction bearings
- > Hard wheel surface, suitable for soft floor coverings
- > Double ball bearing in the ring mount, free-running
- > Material: Housing: Steel; Finish: zinc-plated
Wheel: Plastic; Color: black

Wheel Ø	Weight capacity/caster	Installation height	Mounting plate L x W	Wheel width	Screw hole Ø	Item No.
30 (1 3/16")	30 kg (65 lbs.)	48 (1 7/8")	38 x 38 (1 1/2" x 1 1/2")	15 (19/32")	4.3 (5/32")	662.03.861
40 (1 9/16")	35 kg (77 lbs.)	63 (2 15/32")	42 x 42 (1 21/32" x 1 23/32")	20 (25/32")	5 (3/16")	662.03.870

Casters

- > Features ease of movement on both hard and soft surfaces
- > Available Ø: 75, 100 or 125 mm (2 15/16", 3 15/16" or 4 5/8")
- > High quality brake provides positive locking function
- > Outer wheels are made of non-marring TPR (Thermo Plastic Rubber)
- > Total lock; both wheel and swivel lock

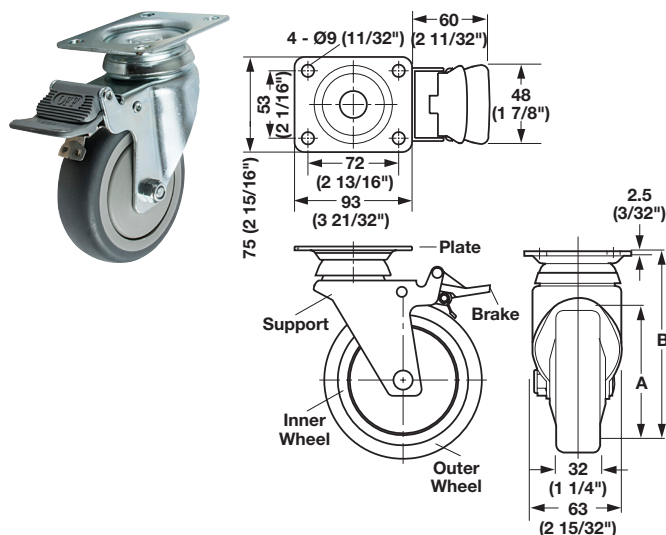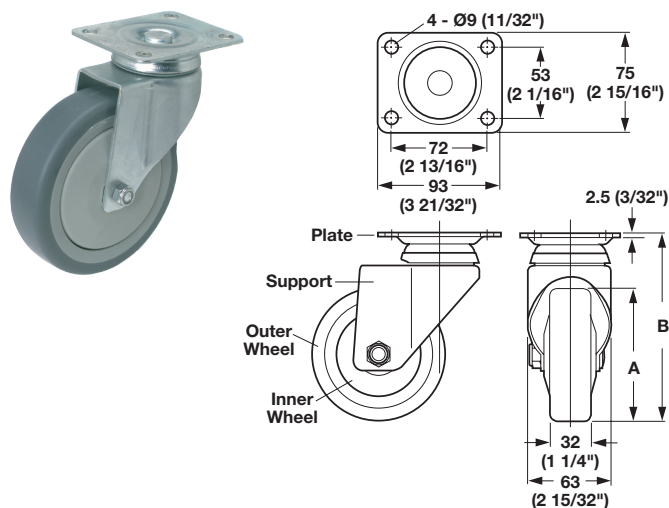


- > Swiveling
- > Without brake
- > Material: Outer wheel: TPR; Color: gray
Inner wheel: Nylon; Color: light gray
Support/Plate: Steel; Finish: zinc-plated

- > Swiveling
- > With brake
- > Material: Outer wheel: TPR; Color: gray
Inner wheel: Nylon; Color: light gray
Support/Plate: Steel; Finish: zinc-plated

A	B	Weight capacity	Item No.
Ø75 (2 15/16")	114 (4 1/2")	70 kg (154 lbs.)	663.25.923
Ø100 (3 15/16")	142 (5 5/8")	70 kg (154 lbs.)	670.12.901
Ø125 (5")	170 (6 3/4")	90 kg (198 lbs.)	670.12.902

A	B	Weight capacity	Item No.
Ø75 (2 15/16")	114 (4 1/2")	70 kg (154 lbs.)	663.25.924
Ø100 (3 15/16")	142 (5 5/8")	70 kg (154 lbs.)	670.13.901
Ø125 (5")	170 (6 3/4")	90 kg (198 lbs.)	670.13.902

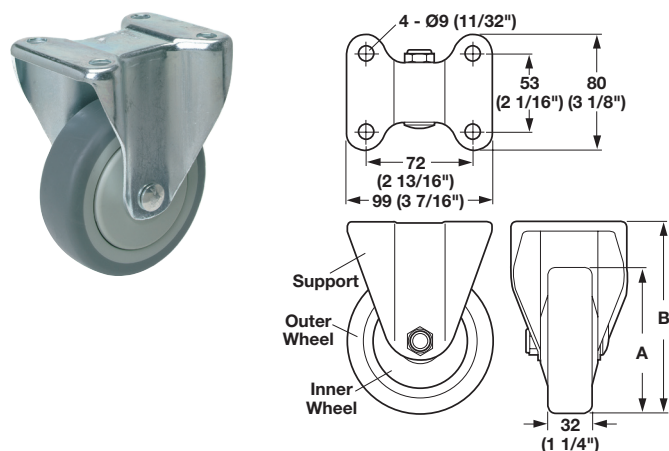

- > Fixed
- > Material: Outer wheel: TPR; Color: gray
Inner wheel: Nylon; Color: light gray
Support/Plate: Steel; Finish: zinc-plated

A	B	Weight capacity	Item No.
Ø100 (3 15/16")	142 (5 5/8")	70 kg (154 lbs.)	670.14.901
Ø125 (4 5/8")	170 (6 3/4")	90 kg (198 lbs.)	670.14.902


Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Casters, Feet, Legs, Table Fittings

Casters

- > White hard wheel for soft floors such as carpet
- > Gray soft wheel for hard floors such as wood
- > Weight capacity/caster: approximately 50 kg (110 lbs.)


→ Roller-Mini

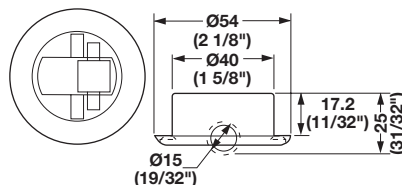

- > Swivel
- > Moves and swivels furniture discreetly and elegantly
- > Only 7 mm (9/32") from floor, making any furniture mobile
- > Material: Plastic; Color: black


Wheel/Color	Item No.
hard/white	661.04.309
soft/gray	661.04.340

6

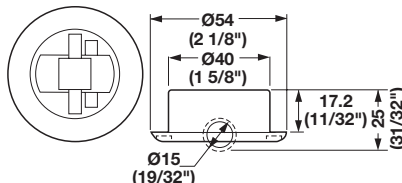


- > Fixed
- > Same design as above in a fixed version
- > Moves in only one direction
- > Material: Plastic; Color: black

Wheel/Color	Item No.
hard/white	661.04.318
soft/gray	661.04.320



- > With retractable wheel
- > Retractable wheel allows furniture to brake under weight
- > Ideal for benches, ottomans, stools, etc.
- > Wheel retracts at 15 kg (33 lbs.) /caster or 45 kg (100 lbs.) /caster
- > Material: Plastic; Color: black


Braking function	Wheel/color	Item No.
15 kg (33 lbs.)	hard/white	661.04.351
	soft/gray	661.04.361
45 kg (100 lbs.)	hard/white	661.04.352
	soft/gray	661.04.362

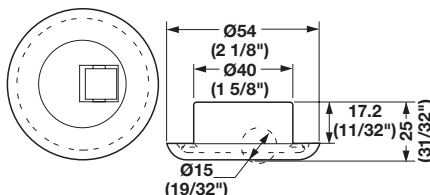

- > Combined glide/swivel
- > For applications that normally would require a glide
- > Caster wheel is used on hard surfaces; glide is used on carpet
- > Material: Plastic; Color: black

Wheel/Color	Item No.
hard/white	661.04.327

→ Mini Roller Caster




- > Weight capacity/caster: 40 kg (88 lbs.)
- > Material: Plastic; Color: black

Wheel/Color	Item No.
hard/white	661.05.320
soft/gray	661.05.330

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Casters


→ Coal Box Casters



- > With screw-on mounting plate, free-running
- > Suitable for all low level storage boxes
- > Casters can be used as a conveyor system for transporting heavy loads when mounted upside down
- > Material: Housing: Steel; Finish: zinc-plated
Wheel: Plastic; Color: black

Wheel Ø	Weight capacity/caster	Installation height	Mounting plate L x W	Hole distance	Wheel width	Screw hole Ø	Item No.
15 (19/32")	15 kg (33 lbs.)	17.5 (11/16")	30 x 17 (1 3/16" x 11/16")	20 (25/32")	13 (1/2")	4 (5/32")	661.23.322
25 (31/32")	20 kg (44 lbs.)	28 (1 1/8")	40 x 17 (1 9/16" x 11/16")	30 (1 3/16")	13 (1/2")	4.3 (5/32")	661.23.304
30 (1 3/16")	25 kg (55 lbs.)	32 (1 1/4")	45 x 20 (1 3/4" x 25/32")	35 (1 3/8")	15 (19/32")	5 (3/16")	661.23.313
45 (1 3/4")	50 kg (110 lbs.)	48.5 (1 15/16")	67 x 27 (2 5/8" x 1 1/16")	54 (2 1/8")	19 (3/4")	5.2 (3/16")	661.25.906


→ Bed Box Casters

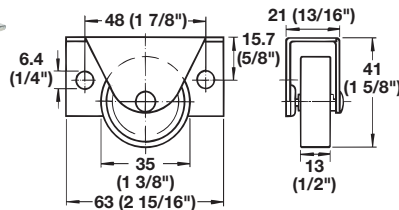

- > With screw-on mounting plate
- > Featuring a wide tread for easy movement on carpet
- > The side mounting facility and low height make it suitable for installation in limited clearance areas
- > Weight capacity/caster: 40 kg (88 lbs.)
- > Material: Housing: Steel; Wheel: Hard Plastic

Housing/Wheel	Item No.
zinc-plated/white	660.98.904
black zinc/black	660.98.304

→ Ball Casters

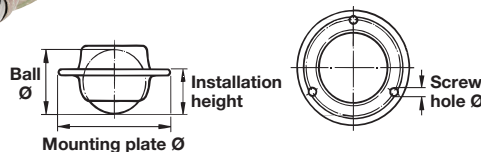

- > With screw-on mounting plate and reinforced base
- > The ball casters can be moved in any direction
- > Caster can be used as a conveyor system for transporting heavy loads when mounted upside down
- > Material: Steel; Finish: Housing: yellow chromate;
Ball: chrome-plated

Ball Ø	Approx. weight capacity/caster	Installation height	Insert part Ø	Insert depth	Mounting plate Ø	Screw hole Ø	Item No.
13 (1/2")	6 kg (13 lbs.)	10 (13/32")	16 (5/8")	5.5 (7/32")	25 (31/32")	2 (3/32")	661.02.210
20 (25/32")	12 kg (26 lbs.)	15 (19/32")	23.5 (15/16")	8.5 (11/32")	35 (1 3/8")	3 (1/8")	661.02.230
25 (31/32")	17 kg (37 lbs.)	20 (25/32")	33 (1 5/16")	12 (13/32")	45 (1 3/4")	3 (1/8")	661.02.250

Square Feet



- > With adjustable glide
- > Available in typical heights: Toe kick: 101 mm (3 31/32")
Vanity: 254 mm (10")
- > With clear lacquer coating
- > Mounting plate allows feet to be mounted flush with cabinet corner
- > Adjustment: 12 mm (15/32")
- > Feet cannot be cut down
- > Weight capacity/foot: 50 kg (100 lbs.)
- > Material: Steel; Glide: Plastic


Height	polished chrome	brushed steel
101 (3 31/32")	634.13.210	634.13.012
254 (10")	634.13.220	634.13.021

Supplied With

4 Feet and mounting plates

Note

Mounting screws are not supplied.

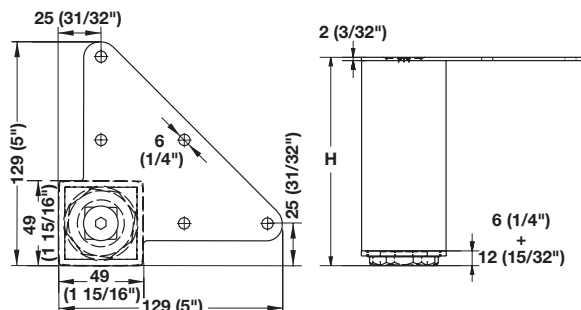


Furniture Feet



- > Static weight rating/foot: approximately 50 kg (110 lbs.)
- > Screw mounted
- > Leveler adjustment: 12 mm (15/32")
- > Material: Zinc die-cast, plated; Levelers: nickel matte

Note

Feet on this page are priced per pc. Minimum order quantity is 2 pcs. If 4 feet are required, please order 4 pcs.

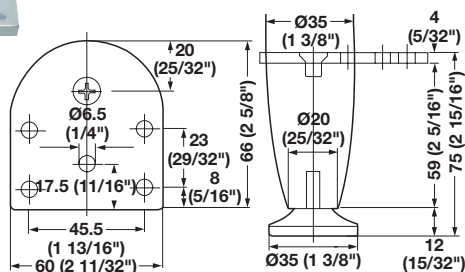

> Height: 75 mm (2 15/16")

Finish


nickel matte

Item No.

634.28.601

Supplied With

2 pcs.

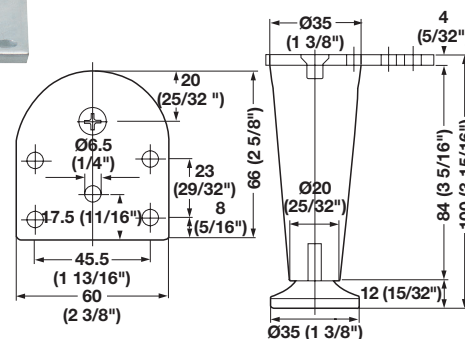

> Height: 100 mm (3 15/16")

Finish

nickel matte

Item No.

634.28.602

Supplied With

2 pcs.

Garage Feet



Foot



Leveler





Threaded
Star Insert

- > Specifically designed for demanding garage applications
- > Feet are coated with a special resin clear coat which is resistant to UV rays, and are salt spray tested to 200 hours vs. 72 hours for typical lacquer coatings
- > Feet can be cut to length if required, threaded star inserts are then pressed in and the leveler is installed
- > Mounting plate is welded on
- > Leveler has a swiveling base plate and adjusts with a 9/16" wrench
- > Material: Leg: Nickel-plated, brushed and resin epoxy-coated, matte Threaded Insert/Leveler: Steel, matte Foot: Nylon; Color: white

Height	Item No.
152 (6")	635.48.060
305 (12")	635.48.061

Supplied with

4 Feet, threaded inserts and levelers
16 Mounting screws, #8 x 3/4"

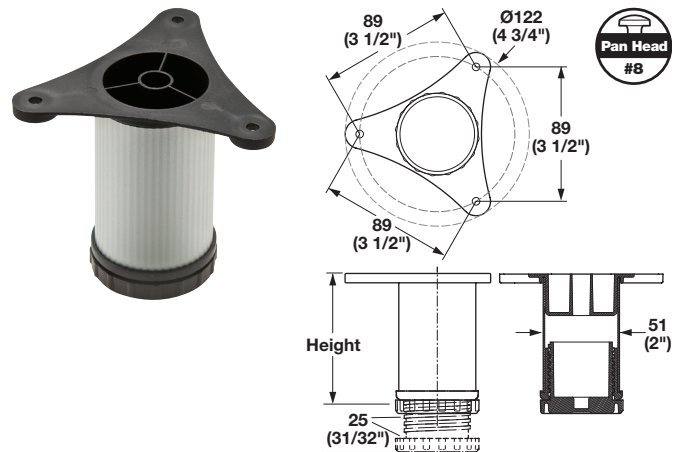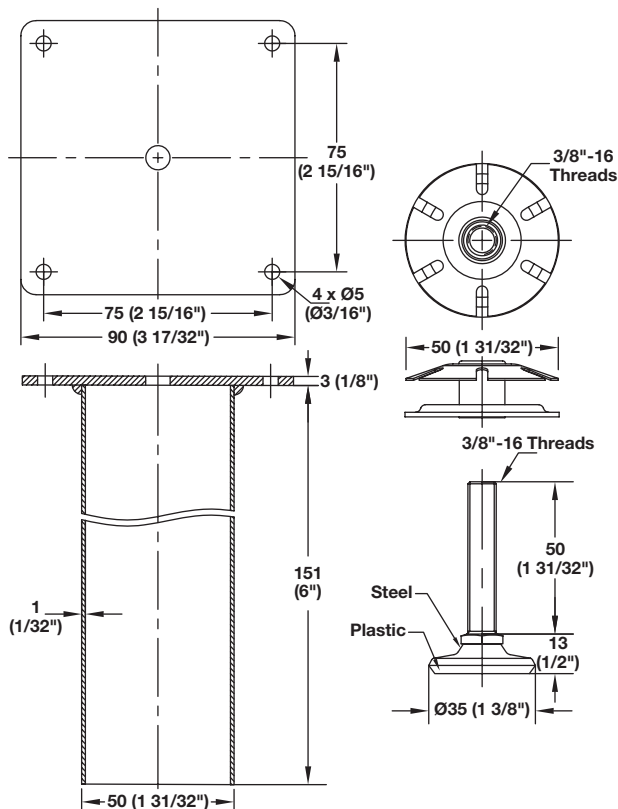

- > Adjustable; offers customization and flexibility for quick installation
- > Ideal for applications in garage organization
- > Fluted aluminum tube is strong and non-corrosive in damp conditions
- > Tube is easy to cut for custom lengths (saw blade for cutting non-ferrous metals recommended)
- > Adjustable foot is pre-inserted in tube
- > Adjustment: +25 mm (31/32")
- > Press fit tube onto surface-mounted base plate
- > Base plate can be mounted and used as a glide during production
- > Static weight capacity/foot: 160 kg (350 lbs.)
- > Material: Tube: Aluminum; Base plate/Foot: Plastic; Color: black

Base height	matte aluminum	black
76 (3")	792.01.080	792.01.380
152 (6")	792.01.081	792.01.381
228 (9")	792.01.082	792.01.382
305 (12")	792.01.083	-


Height Adjustable Feet



- > Adjustable at top plate
- > Adjustment: 18 mm (23/32")
- > Ø x Height: 35 x 100 mm (1 3/8" x 3 15/16")
- > Material: Aluminum

Finish	Item No.
polished chrome	634.16.211
matte silver	634.16.411


Supplied With
4 Feet

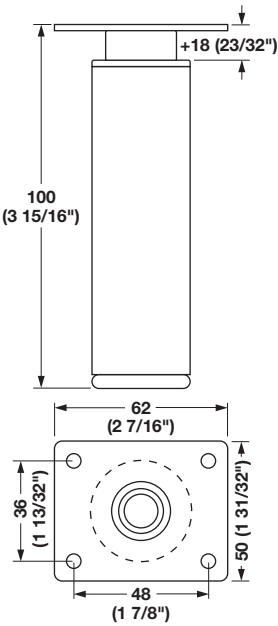


- > Adjustable at top plate
- > Adjustment: 18 mm (23/32")
- > L x W x H: 35 x 35 x 92 mm (1 3/8" x 1 3/8" x 3 5/8")
- > Material: Aluminum

Finish	Item No.
polished chrome	634.16.221
matte silver	634.16.421

Supplied With
4 Feet

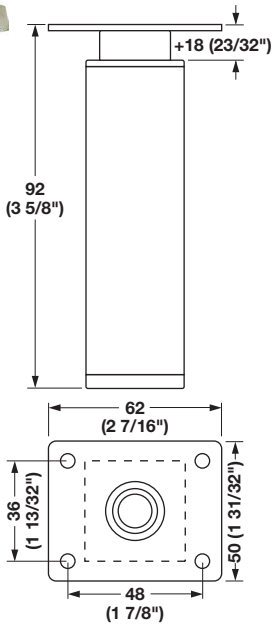

Non-adjustable Feet

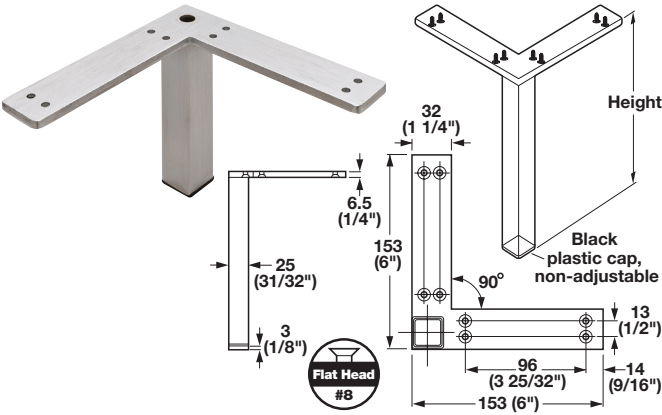

- > Material: Steel; Cap: Plastic; Color: black

Height	polished chrome	brushed steel
129 (5 1/16")	634.47.201	634.47.401
231 (9 1/8")	634.47.202	634.47.402
433 (17 1/16")	634.47.203	634.47.403



Flat head screws	pages 13.7–13.8, 13.10, 13.13
Pan head screws	pages 13.9–13.10

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Equipment Feet

- > Ideally suited for industrial equipment
- > NSF (National Sanitation Foundation) rated
- > Adjustment: 38 mm (1 1/2")
- > Height: 102 or 152 mm (4" or 6")
- > Static weight rating: 907 kg (2,000 lbs.)
- > Material: 304 Stainless Steel

Height	Item No.
102 (4")	635.70.051
152 (6")	635.70.050

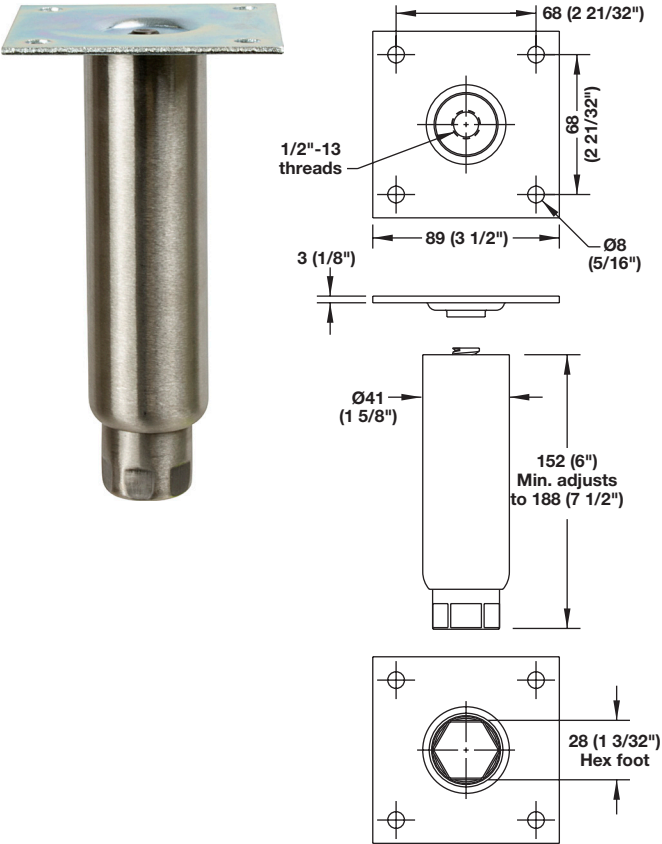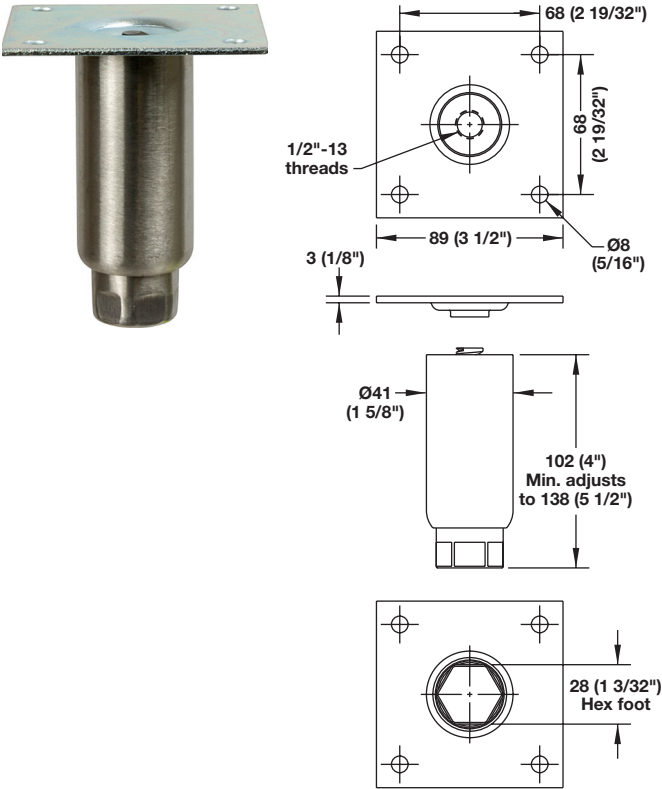

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Häfele AXILO® Base Cabinet Leveling System

- > Serves as an arm extension
- > Very robust
- > Convenient operation and adjustment by hand or with electric tool
- > Ergonomic installation for protection of the back
- > Flexible, time-saving installation
- > Exact adjustment provided by the fine thread
- > Toe kick height area of application: 53–220 mm (2 1/16"–8 21/32")

→ Installation with Häfele AXILO®



→ With Conventional Toe Kick Adjusting Fitting Systems




6

Casters, Feet, Legs, Table Fittings

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Häfele AXILO®

→ Mounting Plates, rectangular

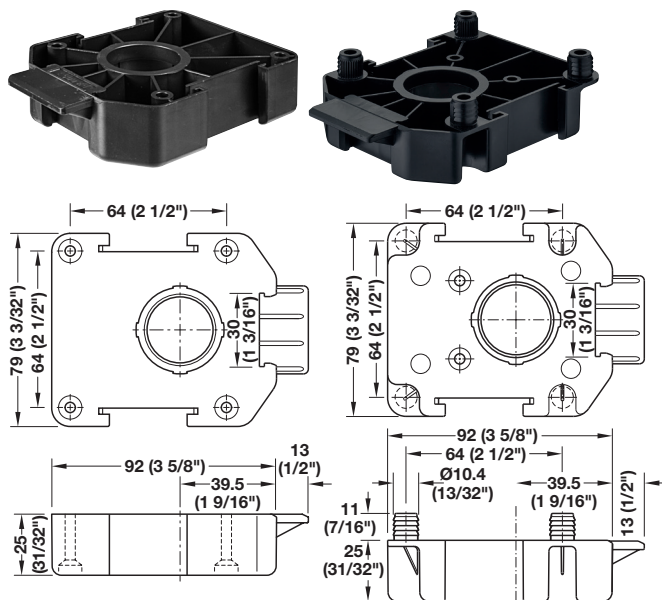


Recommended screw head size:
- #6 x 1 1/2" flat head screw; protrusion: approx. 5/8"

> Material: Plastic; Color: black

Mounting	Item No.
screw	637.76.341
press fit, 10 mm (13/32") holes	637.76.334

→ Mounting Plates, for corner applications

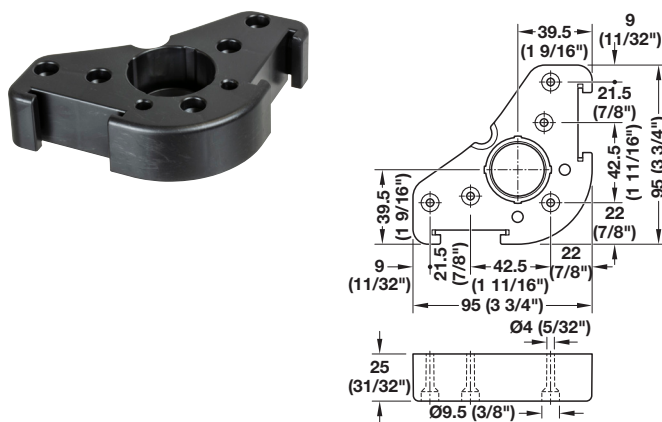


Recommended screw head size:
- #6 x 1 1/2" flat head screw; protrusion: approx. 5/8"

> Screw mounted
> Material: Plastic

Color	Item No.
black	637.76.342



→ Mounting Plate, ring

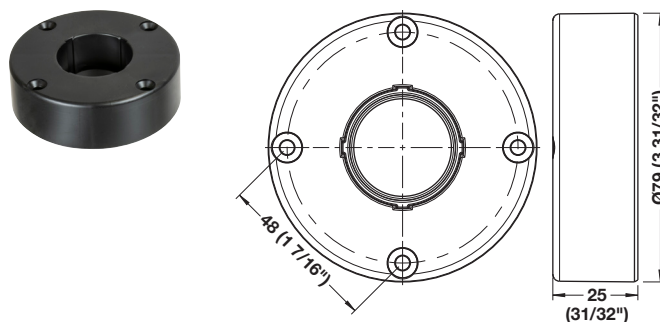

Recommended screw head size:
- #6 x 1 1/2" flat head screw; protrusion: approx. 5/8"

> Screw mounted
> Used when support tabs and toe kick clips are not required
> Material: Plastic

Color	Item No.
black	637.76.344

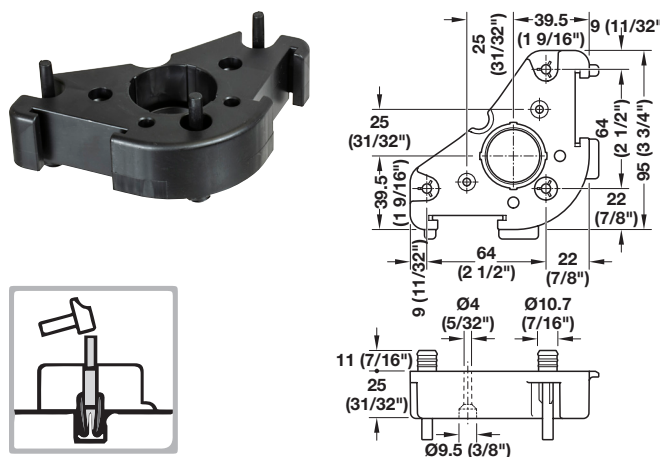


> Pound in dowel mount: 10 mm (13/32")
> Material: Plastic

Color	Item No.
black	637.76.343

Note
Order adjustment feet separately, see next page.

Häfele AXILO®


→ Adjustment Feet

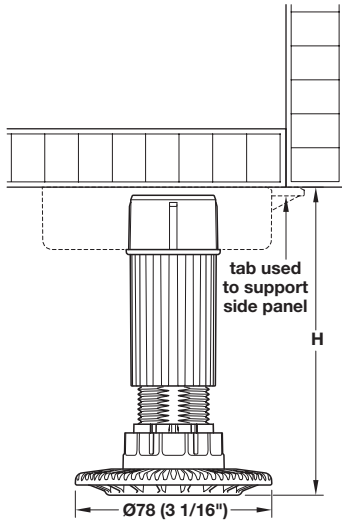

- > Plug fits into mounting plate
- > Height adjustment with AXILO® adjusting tool
- > Adjustable range: 30 mm: -10 mm + 20 mm
(1 3/16": -13/32" + 25/32")
- > Weight capacity/foot: 150 kg (330 lb)
- > Material: Plastic; Color: black

Installation height H	Adjustment range	Item No.
60 (2 3/8")	50–80 (1 31/32"–3 1/8")	637.76.351
80 (3 1/8")	70–100 (2 3/4"–3 15/16")	637.76.352
100 (3 15/16")	90–120 (3 17/32"–4 3/4")	637.76.353
125 (4 15/16")	115–145 (4 1/2"–5 11/16")	637.76.354
150 (5 7/8")	140–170 (5 1/2"–6 11/16")	637.76.355
180 (7 1/16")	170–200 (6 11/16"–7 7/8")	637.76.356
200 (7 7/8")	190–220 (7 1/2"–8 11/16")	637.76.357


→ Press-Fit Low Profile Foot

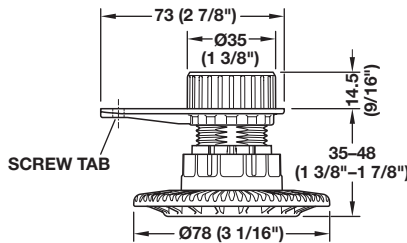

- > Press fits into hole Ø: 35 mm (1 3/8")
- > Secured with screw tab
- > Toe kick height: 35–48 mm (1 3/8"–1 7/8")
- > Height adjustment with AXILO® adjusting tool
- > Weight capacity/foot: 150 kg (300 lb)
- > Material: Plastic

Color	Item No.
black	637.76.460
Supplied with Mounting plate Ø35 mm (1 3/8")	

→ Spacer

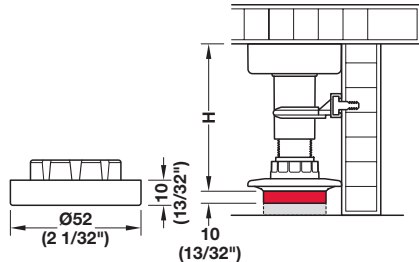

- > Plugs into bottom of existing foot to add height
- > Can be stacked
- > Material: Plastic


Color	Item No.
black	637.76.422

Note
Order adjustment feet separately, above.

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Häfele AXILO®

→ **Toe Kick Panel Clips**

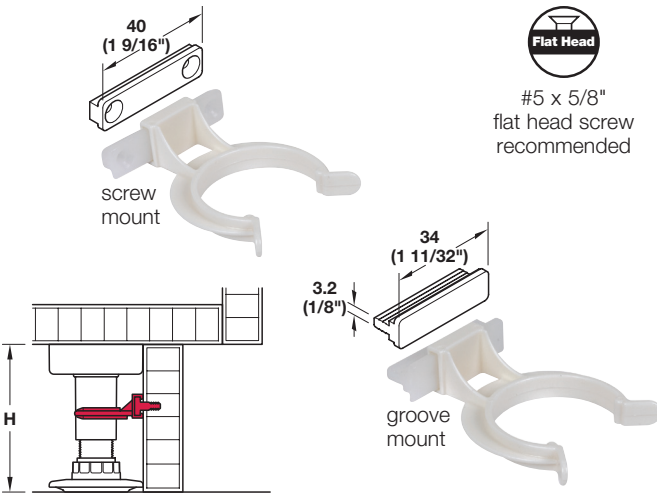


> Material: Plastic; Color: white

Mounting	Item No.
screw	637.38.054
groove	637.38.063

Note

For use from installation height H = 80 mm (3 1/8").

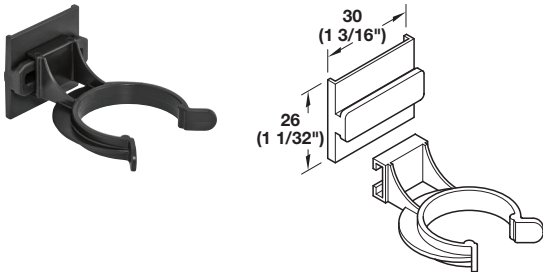


- > For aluminum or plastic toe kick panels
- > Slides into groove on back of toe kick
- > Material: Plastic

Color	Item No.
black	637.38.354

Note

For use from installation height H = 100 mm (3 15/16").

→ **Speed Clips**

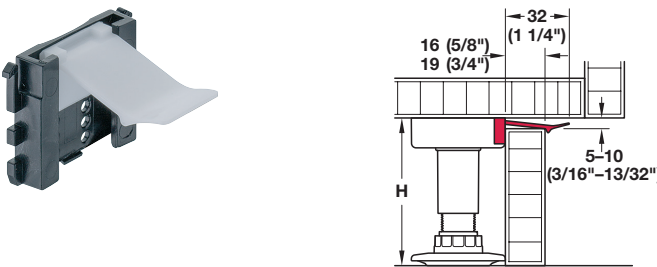


Plinth height = H - 5-10 mm (3/16"-13/32")

- > For mounting the toe kick panel
- > Plug fits into mounting plates
- > Material: Plastic

Panel thickness	Item No.
16 (5/8")	637.47.491
19 (3/4")	637.47.490

→ **Toe Kick Profiles with Sealing Lip**

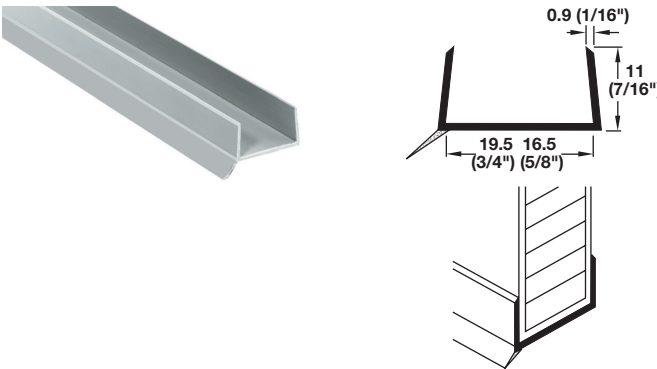



- > Reliably prevents moisture from penetrating the front and edges of the toe kick panels
- > The soft PVC sealing lip adapts perfectly to the floor surface
- > Length: 2.5 m (98 1/2")
- > Material: Plastic (combination of hard and soft)

Color	Material thickness	
	16 mm (5/8")	19 mm (3/4")
white	713.22.762	713.22.792
transparent	713.22.062	713.22.092

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Häfele AXILO®

→ Premium Adjusting Tool

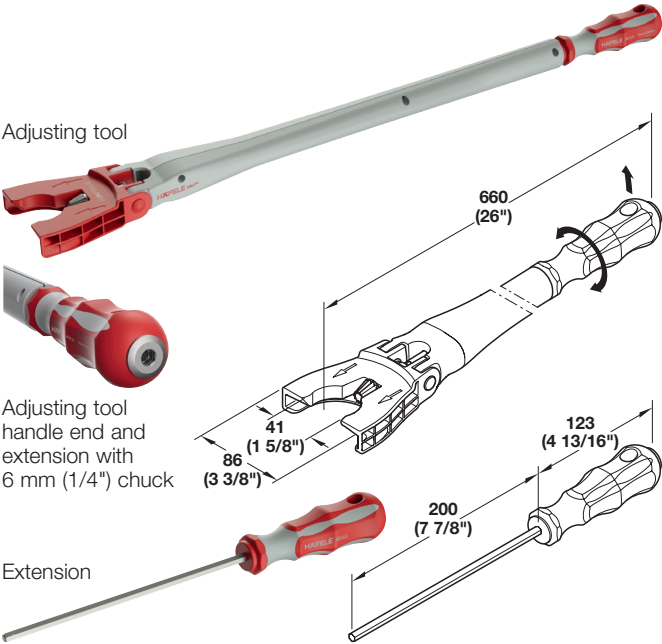


- > Chuck: 6 mm (1/4")
- > For adjustment of AXILO® system
- > Adjustment angle height: 0-10°
- > Material: Plastic/Steel; Color: gray/red

Item	Item No.
Adjusting tool	637.76.360
Extension	637.76.361

Supplied With
6 mm (1/4") Bit

Note
Adjust height by hand or with electric tool.



→ Light Adjusting Tool

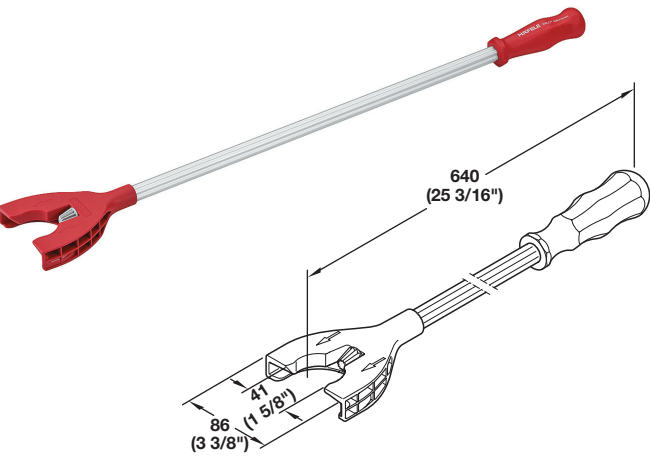

- > A simpler, economic version of the above premium tool
- > For adjustment of AXILO® system
- > By hand only, no adjustment angle
- > Material: Plastic/Aluminum


Color	Item No.
gray/red	637.76.430

Mounting Plates and Clips

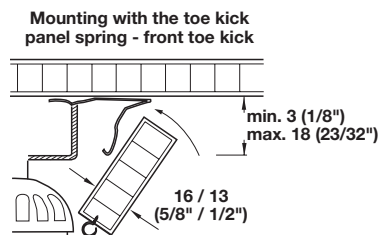

- > Base heights listed are total including mounting plate, tube, and adjusting foot
- > Bayonet locking of the tube in the mounting plate prevents the tube from pulling out during tilting, especially on tall cabinets
- > Toe kick panel attaches with the clips shown, or with Velcro applied to the mounting plate recess

→ Square Mounting Plates

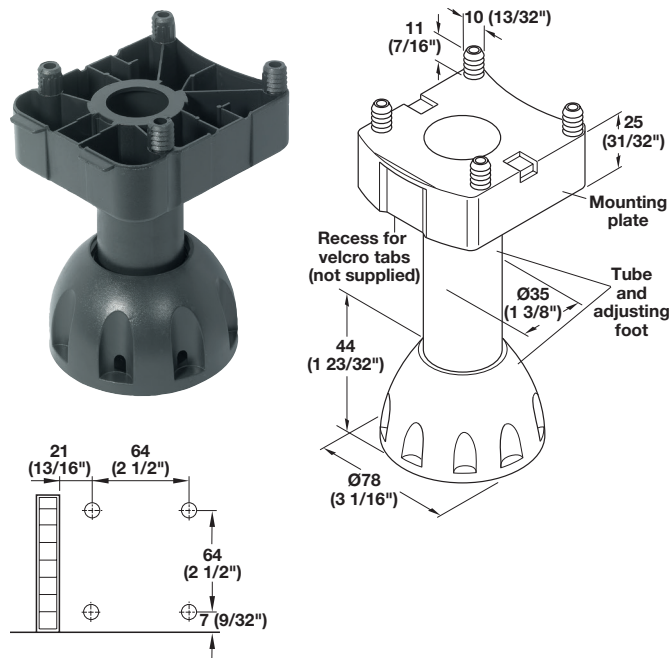

- > For foot Ø: 78 mm (3 1/16")
- > Material: Plastic; Color: black

Mounting	Item No.
press fit	637.79.300
screw mounted	637.79.301

Supplied With 4 Plates

→ Adjustment Feet

- > For mounting plate Ø: 78 mm (3 1/16")
- > Easily adjusts weight/leg: max. 150 kg (330 lbs.)
- > Adjustment range: -10/+18 mm (-13/32"/+23/32")
- > Heights listed are total, including mounting plate
- > Material: Plastic; Color: black

Base height	Item No.
80 (3 1/8")	637.80.350
100 (3 15/16")	637.80.351
120 (4 3/4")	637.80.352
150 (6")	637.80.353

Supplied With 4 Feet, 4 Tubes, Pre-mounted nails


→ Toe Kick Panel Clips



- > For rectangular glide
- > Material: Plastic

Color	Item No.
black	637.81.588

Supplied With 4 Panel holders, Pre-mounted nails



- > For rectangular glide
- > Groove mounted
- > Material: Plastic

Color	Item No.
black	637.81.590

Supplied With 4 Panel holders

→ Toe Kick Panel Spring




- > For front toe kick mounting
- > Toe kick panel is removable with disassembly ring
- > Material: Stainless Steel

Item No.
637.81.330


Supplied With 20 pcs.

Mounting Plates and Clips

Mounting with the toe kick panel spring - front toe kick

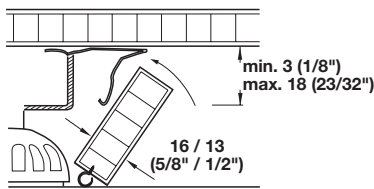

Mounting with the toe kick panel clip



- > Base heights listed are total including mounting plate, tube, and adjusting foot
- > Bayonet locking of the tube in the mounting plate prevents the tube from pulling out during tilting, especially on tall cabinets
- > Toe kick panel attaches with the clips shown, or with Velcro applied to the mounting plate recess

- > For foot Ø: 46 mm (1 3/4")
- > Material: Plastic; Color: black

Mounting

press fit

screw mounted

Item No.

637.79.310

637.79.311

Supplied With

4 Plates

→ Adjustment Feet

- > For triangle mounting plate Ø: 46 mm (1 3/4")
- > Weight capacity/leg: 150 kg (330 lbs.)
- > Adjustment range: -10/+18 mm (-13/32"/+23/32")
- > Heights listed are total, including mounting plate
- > Material: Plastic; Color: black

Base height

80 (3 1/8")

100 (3 15/16")

120 (4 3/4")

150 (6")

Item No.

637.80.360

637.80.361


637.80.362

637.80.363

Supplied With

4 Feet, 4 Tubes

→ Toe Kick Panel Clips



- > For triangle mounting plate
- > Material: Plastic

Color


black

Item No.

637.81.589

Supplied With

4 Panel holders, Pre-mounted nails



- > For triangle mounting plate
- > Groove mounted
- > Material: Plastic

Color

black

Item No.

637.81.591

Supplied With 4 Panel holders

→ Toe Kick Panel Spring



- > For front toe kick mounting
- > Toe kick panel is removable with disassembly ring
- > Material: Stainless Steel

Item No.

637.81.330


Supplied With

20 pcs.

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Levelers

→ Adjustment Feet

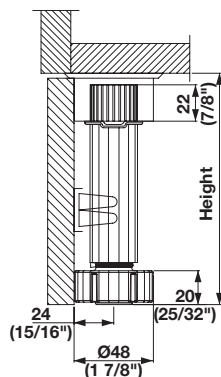


- > Slots in base allow for easy adjustment with flat blade screwdriver
- > Shaft Ø: 28 mm (1 1/8")
- > Adjustment range: -5/+20 (-3/16"/+25/32")
- > Weight capacity/foot: 114 kg (250 lbs.)
- > Material: Plastic; Color: black

Base height

Base height	Item No.
80 (3 1/8")	637.19.380
100 (3 15/16")	637.19.360

Note

Height listed is total, including mounting socket.
See page 6.25 for toe kick clips and M10 attachment screw.

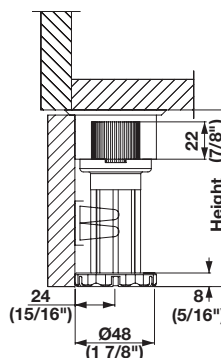

- > For short applications



Base height

Base height	Item No.
50 (1 31/32")	637.86.331
70 (2 3/4")	637.86.335

Note

50 mm (1 31/32") version will not accept toe kick clips.

→ Mounting Sockets

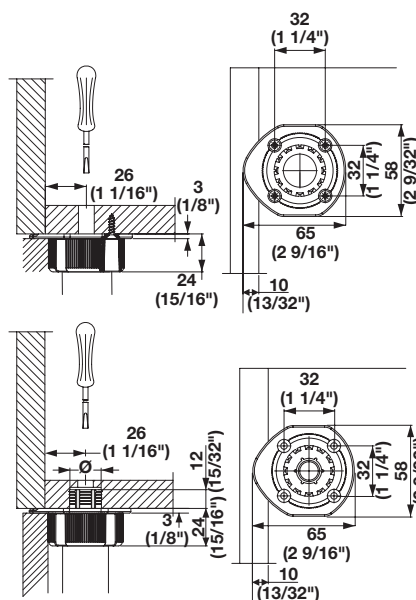

- > Screw or through mounted with M10 screw or pounded in with dowel
- > Material: Plastic; Color: black


Mounting

Mounting	Item No.
screw	637.19.964
pound in dowel, Ø10 mm (13/32")	637.19.952
pound in dowel, Ø15 mm (19/32")	637.19.954

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

XT Levelers

→ **Adjustment Foot**

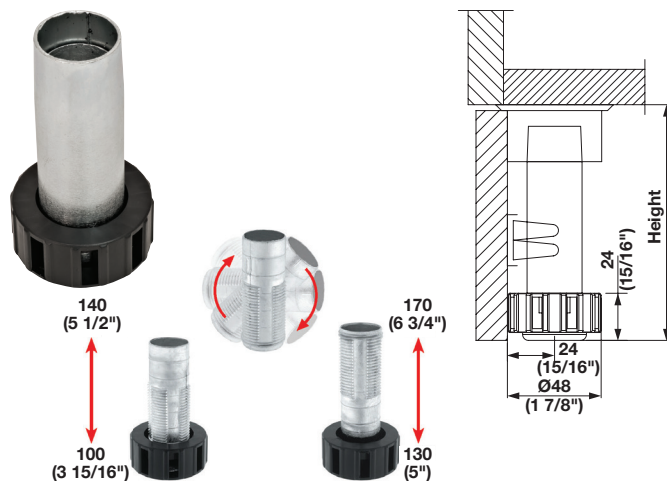

- > With reversible inner threaded tube to create 2 height ranges: 100–140 mm (3 15/16"–5 1/2")
130–170 mm (5"–6 3/4")
- > Choose between plastic or metal mounting sockets below
- > Shaft Ø: 28 mm (1 1/8")
- > Weight capacity/foot: 150 kg (330 lbs.)
- > Material: Shaft: Steel; Foot: Plastic; Color: black


Item No.

637.59.932

Note

Height ranges include mounting socket.
 See next page for toe kick clips and M10 attachment screw.

→ **Plastic Mounting Sockets**

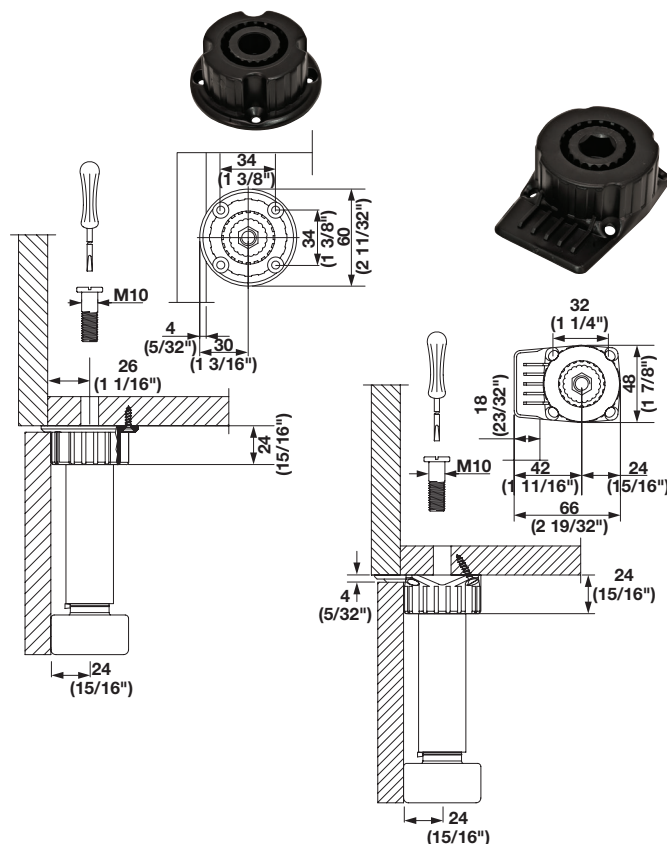

- > Both versions can be screw mounted or through mounted with M10 attachment screw
- > Material: Plastic; Color: black

Version

round


Item No.

637.59.980

with additional support tab

637.59.992

→ **Metal Mounting Sockets**

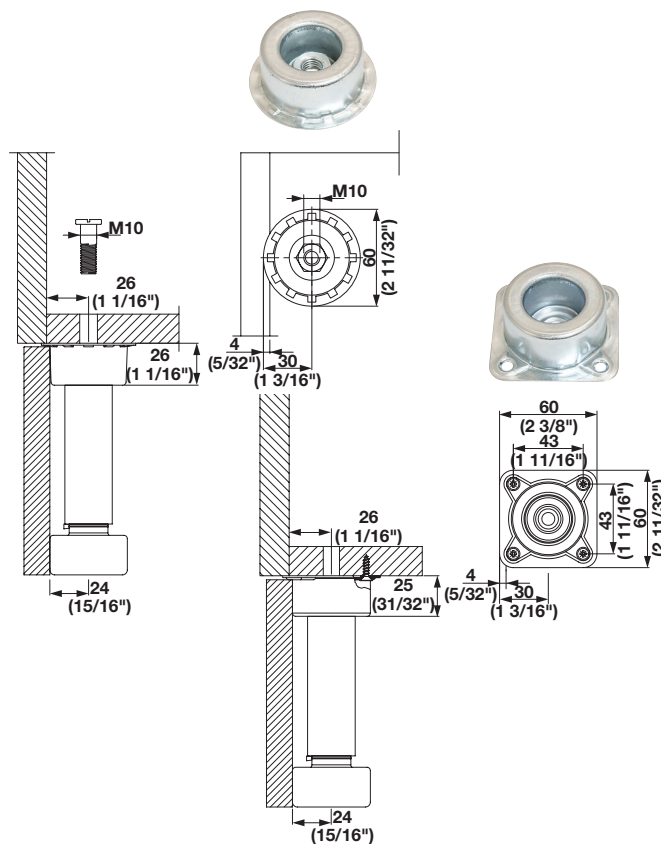

- > Square is screw mounted
- > Round is through mounted with M10 attachment screw
- > Material: Steel

Version

round

Item No.


637.19.020

square with additional support tab

637.19.060

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.


Adjustment Feet

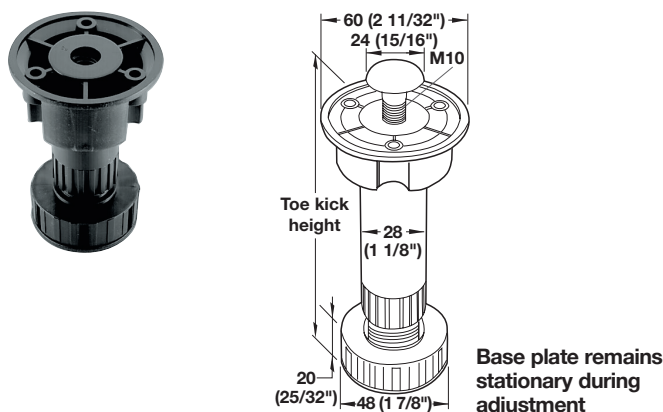

- > 2-part
- > 3 flat head screws can be used in place of M10 screw
- > Adjustment range: -5+10 mm (-3/16"+13/32")
- > Weight capacity/leg: 150 kg (330 lbs.)
- > Material: Plastic; Color: black

Height	Item No.
80 (3 1/8")	637.45.308
100 (3 15/16")	637.45.326
120 (4 3/4")	637.45.344
150 (6")	637.45.371

→ Toe Kick Panel Clips

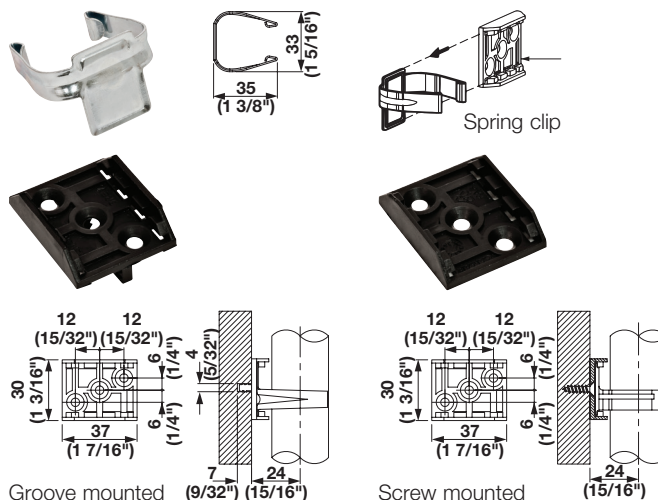


- > For shaft Ø: 28 mm (1 1/8")
- > Material: Spring Clip: Steel; Adapter: Plastic; Color: black

Item	Item No.
Spring clip	637.19.941
Groove mounted adapter	637.19.942
Screw mounted adapter	637.42.020

Note

Order spring clip and choose between screw mounted or groove mounted adapters.

→ Toe Kick Clips

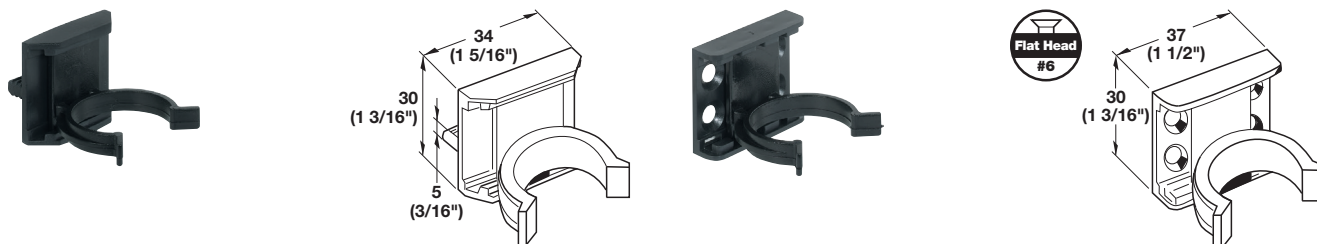

- > For shaft Ø: 28 mm (1 1/8")
- > 2-part
- > Groove mounted to toe kick panel
- > Material: Plastic

Color	Item No.
black	637.45.915

- > For shaft Ø: 28 mm (1 1/8")
- > 2-part
- > Screw mounted to toe kick panel
- > Material: Plastic

Color	Item No.
black	637.45.906


→ M10 Attachment Screw



- > Material: Steel

Finish	Item No.
zinc-plated	637.45.999

→ Cap




- > Material: Plastic

Color	Item No.
white	637.45.791

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.


Adjustment Feet

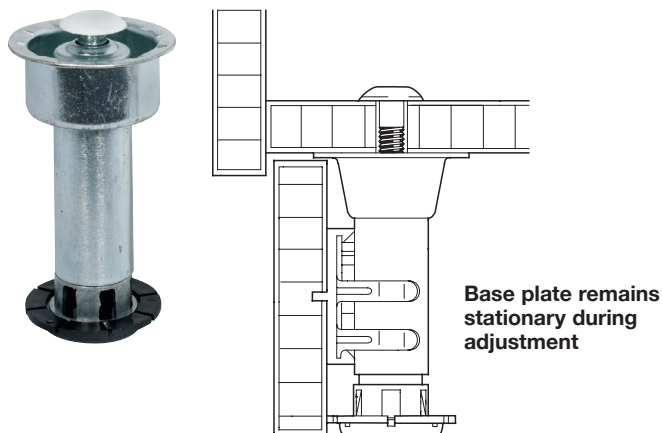

- > 2-part
- > M10 attachment screw with cap
- > Shaft Ø: 28 mm (1 1/8")
- > Material: Steel; Finish: zinc


Toe Kick height	Item No.
100-120 (3 15/16"-4 3/4")	637.19.219
120-140 (4 3/4"-5 1/2")	637.19.228
150-170 (6"-6 3/4")	637.19.237

→ **Toe Kick Panel Clips**

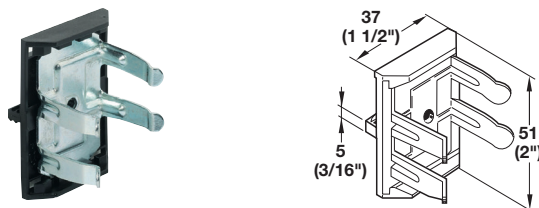

- > 2-part
- > Groove mounted to toe kick panel
- > Material: Plastic/Steel


Color	Item No.
black	637.19.915

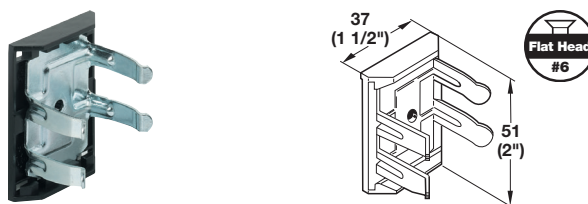

- > 2-part
- > Screw mounted to toe kick panel
- > Material: Plastic/Steel

Color	Item No.
black	637.19.906

Cabinet Leveling Offset Feet

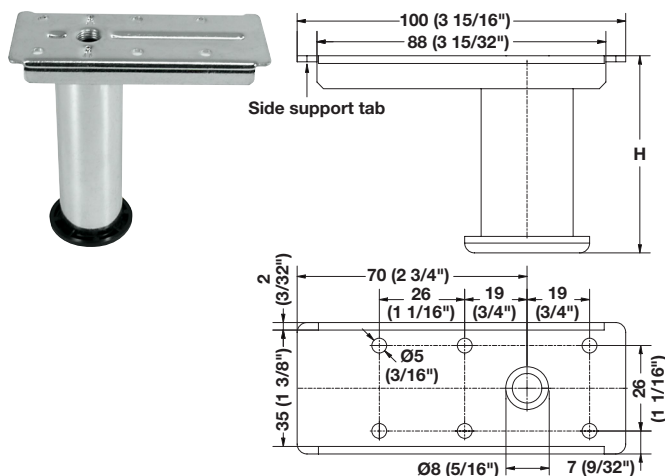

- > Ideal for use with undermount slides as adjustment access hole is offset from the cabinet side
- > With cabinet side supporting tab
- > Adjust through the top with a 6 mm hex key, order separately
- > Weight capacity: 200 kg (440 lbs.)
- > Material: Steel/Zinc/Plastic

Height	Item No.
100-120 (3 15/16"-4 3/4")	637.19.220
120-140 (4 3/4"-5 1/2")	637.19.221




Flat head screws


pages 13.7-13.8, 13.10, 13.13

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.


Adjustment Feet



- > Offers a wider range of adjustment with fewer items
- > Allows for greater flexibility at installation
- > Components ordered separately



→ **Extension Tube**




- > Shaft Ø: 30 mm (1 3/16")
- > Weight capacity: 113 kg (250 lbs.)
- > Material: Plastic; Color: black

- > Material: Plastic


Base height	Item No.
91-119 (3 9/16"-4 11/16")	637.54.311
141-169 (5 9/16"-6 11/16")	637.54.313

Color	Item No.
black	637.54.320

→ **Mounting Sockets**

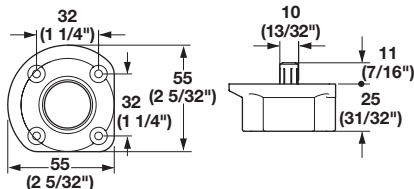

- > Dowel mounted
- > Material: Plastic

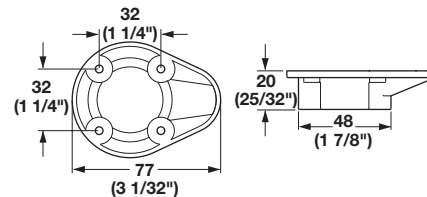


- > Screw mounted
- > Material: Plastic

Color	Item No.
black	637.54.330

Color	Item No.
black	637.54.335

→ **Toe Kick Panel Clip**

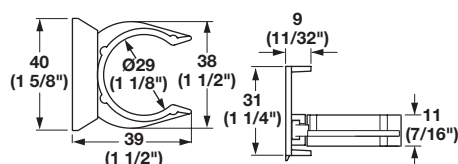


- > Screw mounted to toe kick
- > Material: Plastic

Color	Item No.
black	637.54.340

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Casters, Feet, Legs, Table Fittings

Mini Legs

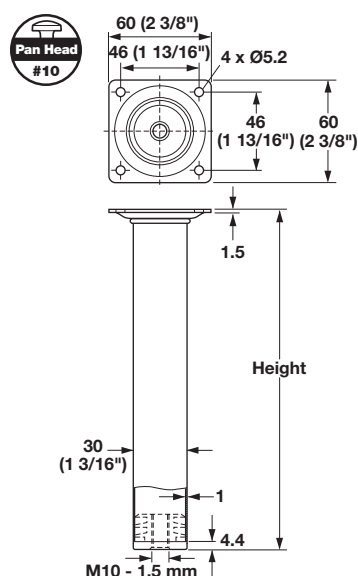


- > For light duty applications
- > Heights listed are without levelers, order separately
- > Tube thickness: 1 mm (1/32")
- > Static weight rating/leg: approximately 30 kg (66 lbs.)
- > Ø: 30 mm (1 3/16")
- > With M10 threaded plastic insert
- > Material: Steel, epoxy-coated or polished
- Insert: Plastic; Color: black

Height	black semi-gloss	polished chrome
100 (3 15/16")	635.48.310	635.48.210
150 (6")	635.48.315	635.48.215

Supplied With


4 Legs

→ **M10 Base Levelers**




- > Material: Thread: Steel; Base: Nylon; Color: black

Finish	Item No.
zinc-plated	651.01.330



- > With fixed foot
- > Material: Thread: Steel; Finish: zinc-plated
- Base: Nylon; Color: black



Length	Item No.
30 (1 3/16")	651.01.304
50 (1 15/16")	651.01.500



- > Swivels with ball joint
- > Material: Thread: Steel; Foot: Plastic; Color: black

Finish	Item No.
zinc-plated	651.00.125

E-Legs Ø50 (1 15/16")

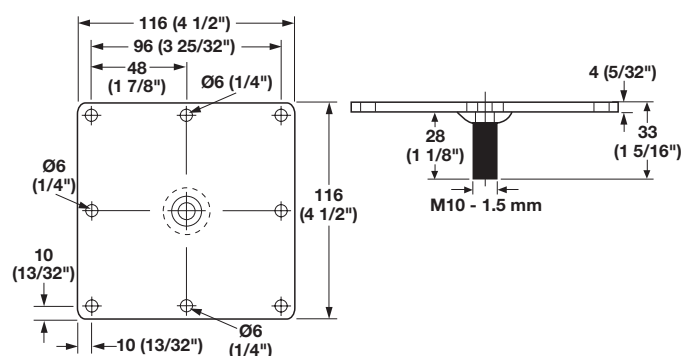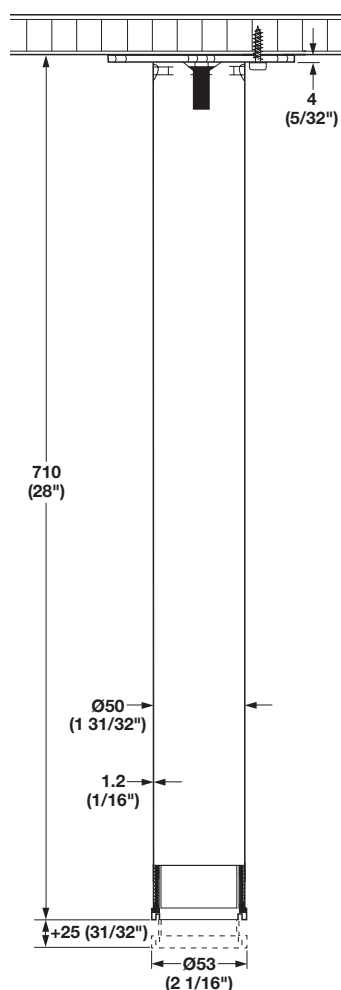

- > Square mounting plate with M10 bolt
- > Leg screws into mounting plate
- > Levelers are pressed in, they can be removed and pounded back in if legs need to be cut
- > Adjustment range: +25 mm (31/32")
- > Static weight rating/leg: approximately 100 kg (220 lbs.)
- > Material: Legs: Steel, plated or epoxy-coated
 Leveler: Plastic; Color: black
 Mounting plate: Steel; Finish: black

Finish	Item No.
polished chrome	635.68.271
black textured	635.68.373
satin nickel	635.68.471
silver aluminum RAL 9006	635.68.971

Supplied With

4 Legs
 4 Mounting plates
 4 Levelers
 Screws #9 x 1"


Note

Height includes mounting plate and leveler.

E-Legs Ø60 (2 3/8")

6

Casters, Feet, Legs, Table Fittings

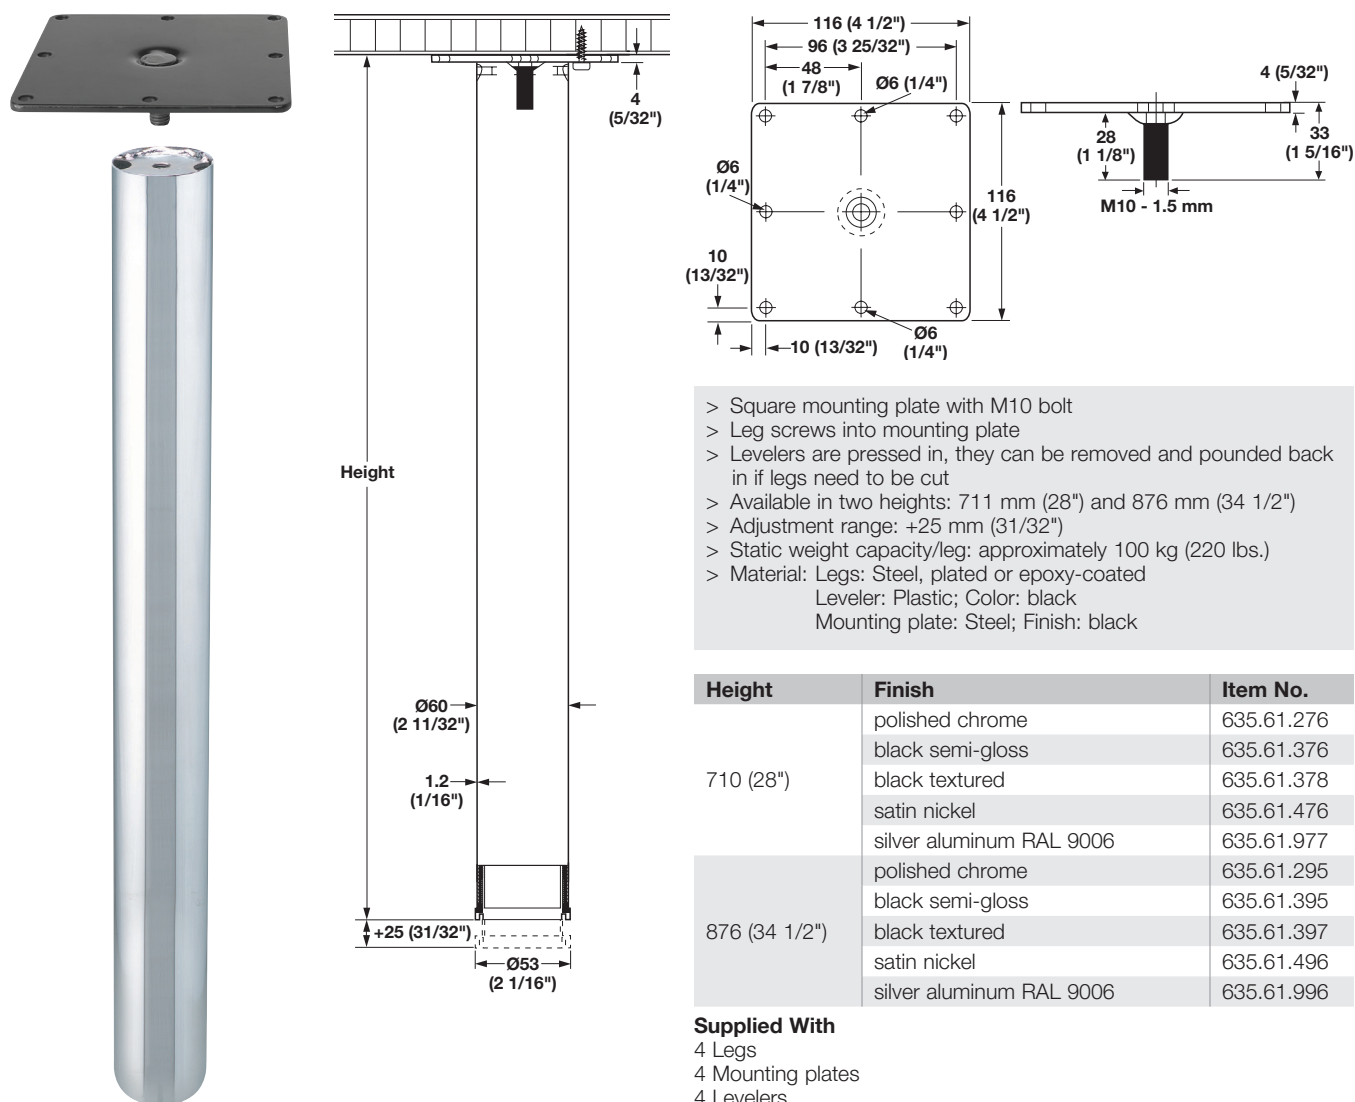

- > Square mounting plate with M10 bolt
- > Leg screws into mounting plate
- > Levelers are pressed in, they can be removed and pounded back in if legs need to be cut
- > Available in two heights: 711 mm (28") and 876 mm (34 1/2")
- > Adjustment range: +25 mm (31/32")
- > Static weight capacity/leg: approximately 100 kg (220 lbs.)
- > Material: Legs: Steel, plated or epoxy-coated
 Leveler: Plastic; Color: black
 Mounting plate: Steel; Finish: black

Height	Finish	Item No.
710 (28")	polished chrome	635.61.276
	black semi-gloss	635.61.376
	black textured	635.61.378
	satin nickel	635.61.476
	silver aluminum RAL 9006	635.61.977
876 (34 1/2")	polished chrome	635.61.295
	black semi-gloss	635.61.395
	black textured	635.61.397
	satin nickel	635.61.496
	silver aluminum RAL 9006	635.61.996


Supplied With

- 4 Legs
- 4 Mounting plates
- 4 Levelers
- Screws #9 x 26 mm (1 1/32")

Note

Height includes mounting plate and leveler.

→ **Leveler Ø60 (2 3/8")**



- > Press fit
- > Adjustment: +26 mm (1 1/32")
- > Compressed height when completely screwed down: 16 mm (5/8")
- > Material: Plastic



Color	Item No.
black	635.06.008

Supplied With

- 4 Levelers

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

E-Legs Ø60 (2 3/8")

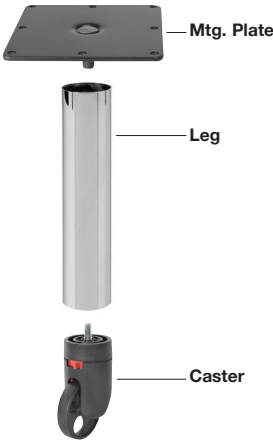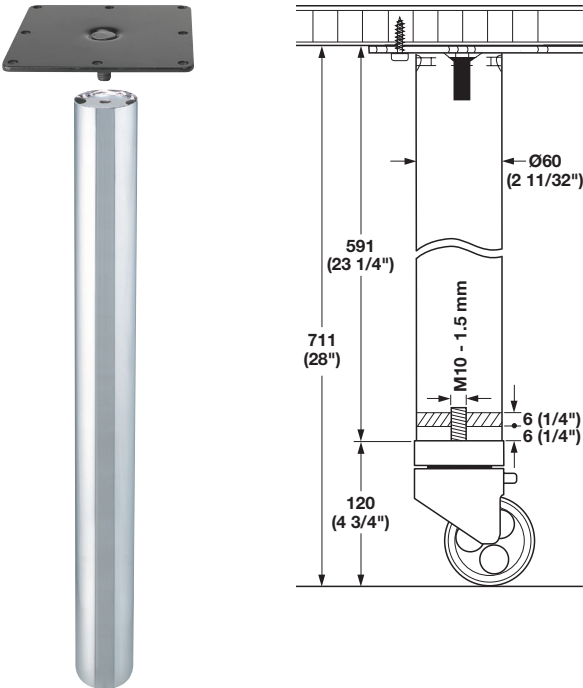

- > Square mounting plate with M10 bolt
- > Leg screws into mounting plate
- > Height: 591 mm (23 1/4")
- > Total height with casters: 711 mm (28")
- > Static weight capacity/leg: approximately 100 kg (220 lbs.)
- > With M10 threaded plate for casters
- > Material: Legs: Steel, plated or epoxy-coated
- > Mounting plate: Steel; Finish: black

Finish

black textured
satin nickel

Item No.

635.60.367
635.60.465


Supplied With

4 Legs
4 Mounting plates
Screws #9 x 1"

Note

For use with swivel casters, sold separately.

→ Swiveling Casters with brake



- > Ø: 80 mm (3 1/8")
- > With M10 threads
- > Screws directly into threaded plate (washer not required)
- > Weight capacity/caster: 120 kg (264 lbs.)
- > Material: Body: Steel/Plastic; Wheel: Rubberized

Body/Wheel

black/pierced black
black/solid black
silver/silver

Item No.

661.29.301
661.29.305
661.29.910

Supplied With

4 Casters

Caster Leveler System




- > Use 2 legs with levelers and 2 legs with casters for a table which can be "wheel barrowed"
- > Legs come with insert in bottom to accept levelers, spacers and casters, order separately
- > Static weight capacity/leg: approximately 100 kg (220 lbs.)
- > With threaded insert
- > Material: Legs: Steel, plated or epoxy-coated
Mounting plate: Steel; Finish: black; Insert: Plastic

→ E-Legs Ø60 (2 3/8")

6

Casters, Feet, Legs, Table Fittings

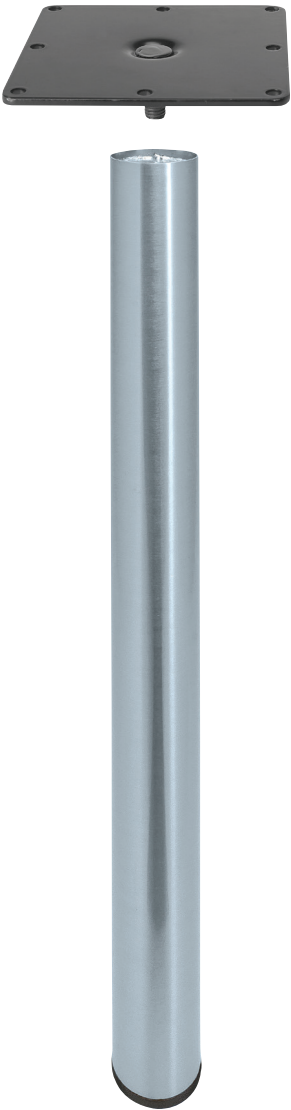


Finish	Item No.
black textured	635.60.386
satin nickel	635.60.485
silver/aluminum RAL 9006	635.60.985

Supplied With

4 Legs
4 Mounting plates
Screws #9 x 1"

Note

Requires optional levelers, spacers or casters to be ordered separately, see next page.

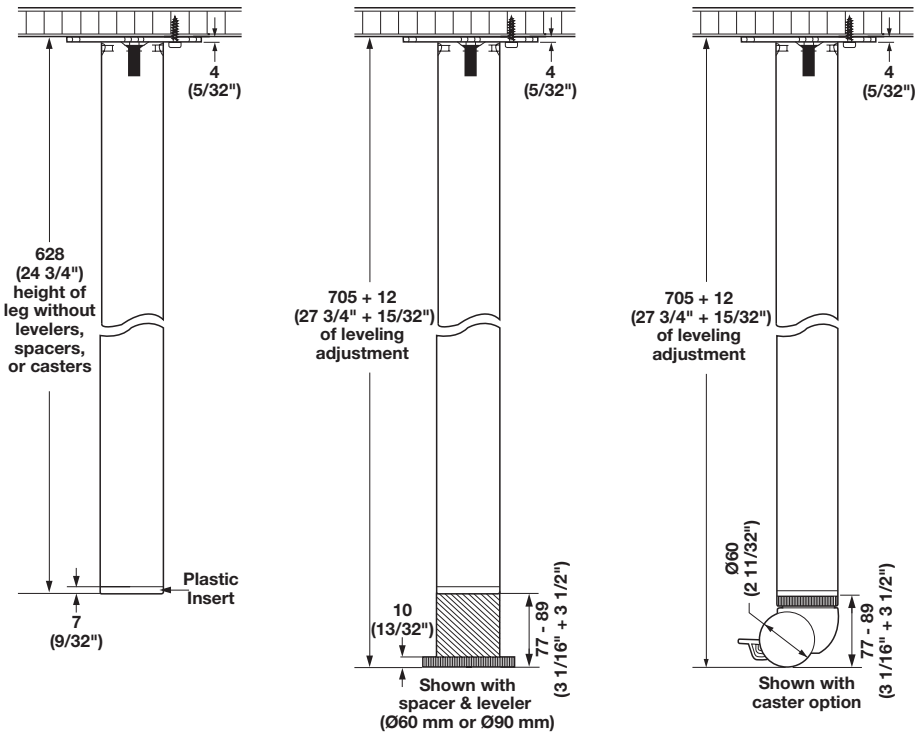

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Caster Leveler System



> Material: Plastic; Color: black

Note

For use with legs on previous page.

→ Levelers



> Height: 10 mm (13/32")

Diameter

60 (2 3/8")


90 (3 1/2")

Item No.

635.01.001

635.01.002

→ Caster with brake



> Ø x H: 60 x 77 mm (2 3/8" x 3 1/16")

> Casters are adjustable: max. 12 mm (15/32") for leveling tables on uneven floors

> Leveler plus spacer equals the same height as casters

Color

black

Item No.

635.01.004

→ Spacer



> Ø: 60 mm (2 3/8")

> Height with leveler: 67+10 mm=77 mm (2 5/8"+13/32"=3 1/16")


Color

black

Item No.

635.01.003

→ Replacement Insert



Color

black

Item No.


635.01.006

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Casters, Feet, Legs, Table Fittings

6

Component System Ø60 (2 3/8")

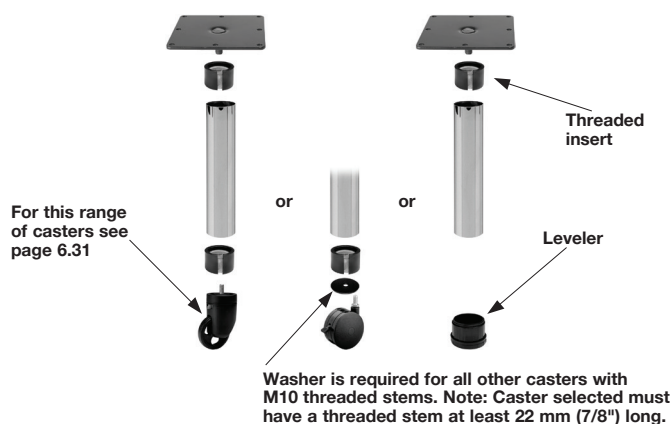


> Tubes can be cut to height

Note

Various accessories are available, see next page.

6

→ Mounting Plate Set for E-Legs

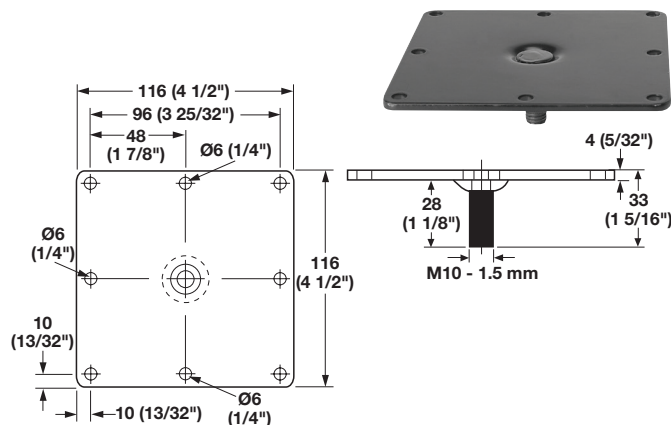

- > Screw mounted
- > With M10 stud
- > Material: Steel, epoxy-coated

Color

black

Item No.

635.06.015

Supplied With

4 Mounting plates
 Mounting screws #9 x 1"

→ Tubes Ø60 (2 3/8")



> Height: 1,425 mm (56")

> Material: Steel, plated or epoxy-coated

Finish

satin nickel

polished chrome

black textured

silver aluminum RAL 9006

Item No.

635.20.066


635.20.266

635.20.368


635.20.966

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Component System Accessories

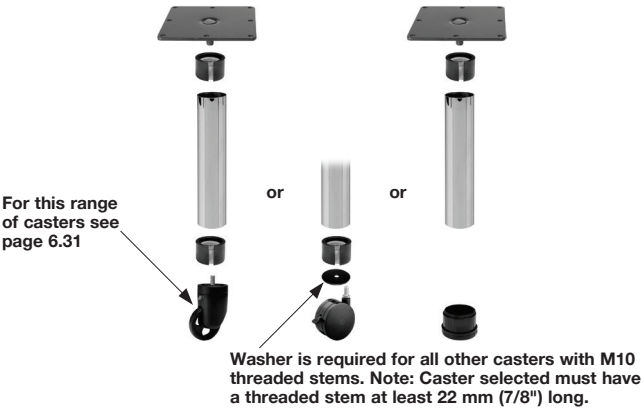


→ Leveler



- > Ø: 60 mm (2 11/32")
- > Press fit
- > Adjustment: +26 mm (1 1/32")
- > Compressed height when completely screwed down: 16 mm (5/8")
- > Material: Plastic

Color	Item No.
black	635.06.009
Supplied With 4 Levelers	


→ M10 Thread Insert



- > For mounting plate and caster attachment
- > Presses into top or bottom of tube
- > Material: Steel/Plastic

Color	Item No.
black	635.06.026
Note Caster selected must have a threaded stem length: max. 22 mm (7/8"). Washer is required.	

→ Washer



- > Ø: 60 mm (2 11/32")
- > For bottom of legs when used with casters
- > M10 male threads required
- > Material: Steel


Finish	Item No.
black	635.16.399

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

E-Legs Ø76 (3")

6

Casters, Feet, Legs, Table Fittings

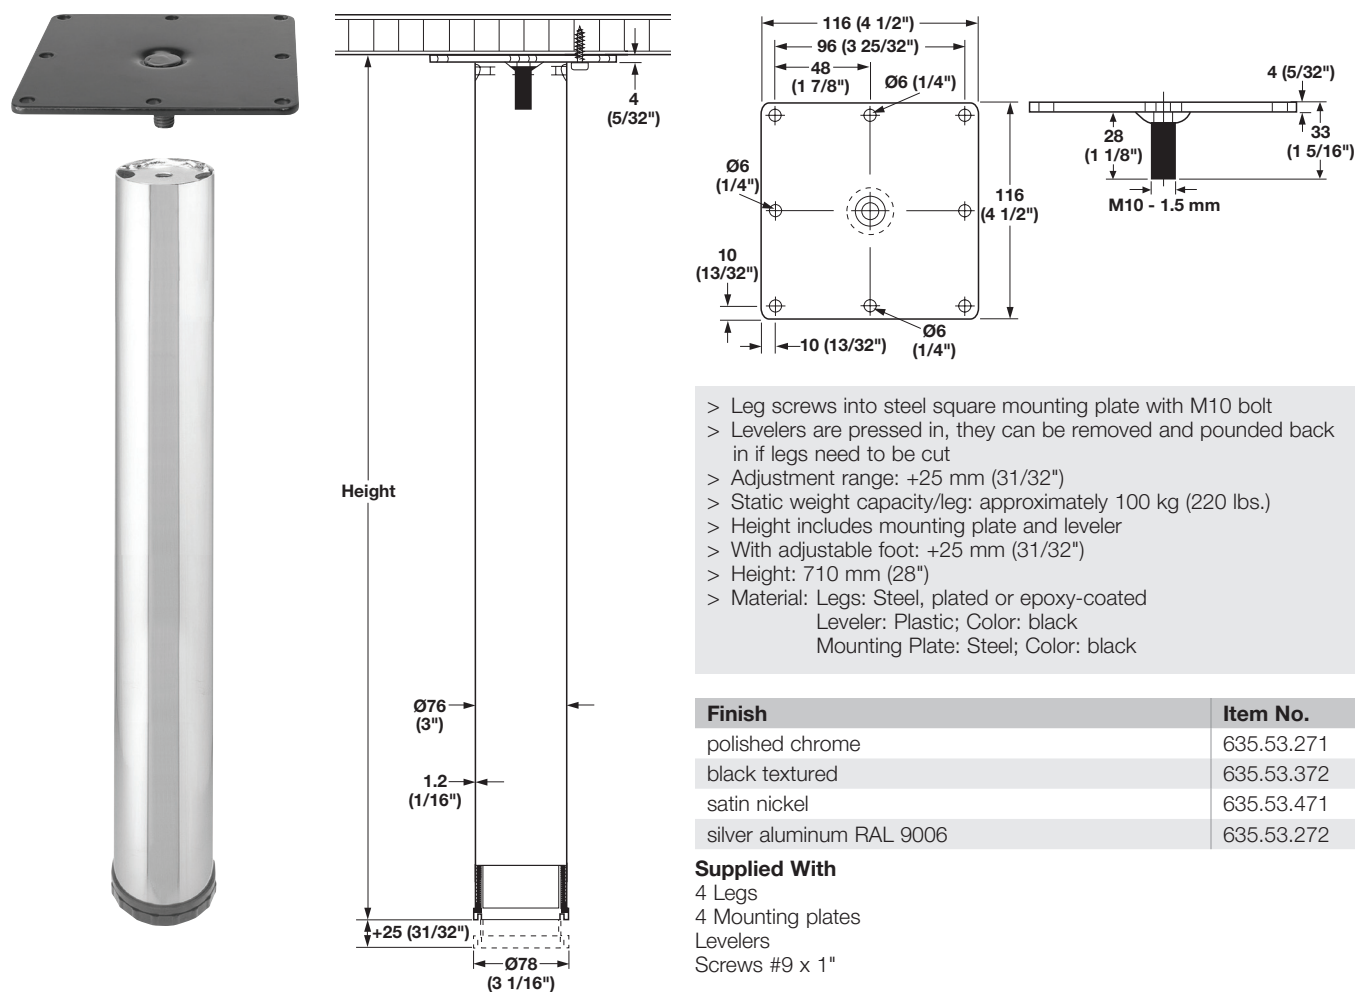


- > Leg screws into steel square mounting plate with M10 bolt
- > Levelers are pressed in, they can be removed and pounded back in if legs need to be cut
- > Adjustment range: +25 mm (31/32")
- > Static weight capacity/leg: approximately 100 kg (220 lbs.)
- > Height includes mounting plate and leveler
- > With adjustable foot: +25 mm (31/32")
- > Height: 710 mm (28")
- > Material: Legs: Steel, plated or epoxy-coated
 Leveler: Plastic; Color: black
 Mounting Plate: Steel; Color: black

Finish	Item No.
polished chrome	635.53.271
black textured	635.53.372
satin nickel	635.53.471
silver aluminum RAL 9006	635.53.272

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Square Legs

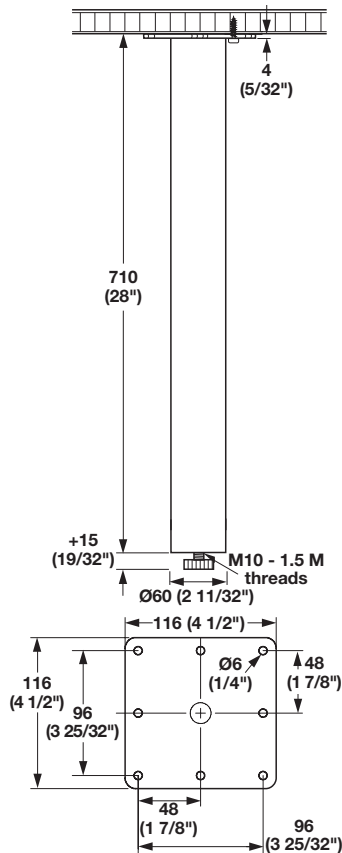

- > With leveler
- > Mounting plate is welded to leg
- > Adjustment range: 16 mm (5/8")
- > Static weight capacity/leg: approximately 100 kg (220 lbs.)
- > W x D: 60 x 60 mm (2 11/32" x 2 11/32")
- > Material: Legs: Steel, plated or epoxy-coated
Leveler: Plastic; Color: black

Finish

black textured


Item No.

635.36.380

Supplied With

4 Legs
Screws #9 x 1"

Single Column Support Legs

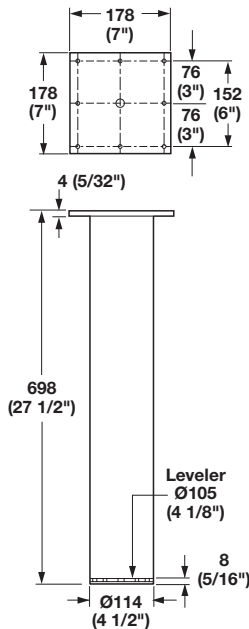

- > Used as a support leg for peninsula tops
- > Leveler with M10 threads Ø: 105 mm (4 1/8")
- > Height adjustment: 698+19 mm (27 1/2"+3/4")
- > Ø: 114 mm (4 1/2")
- > Material: Steel, epoxy-coated
Leveler: Plastic; Color: black

Finish

silver/aluminum RAL 9006


black textured

Item No.

635.35.271

635.35.371

Side Bases

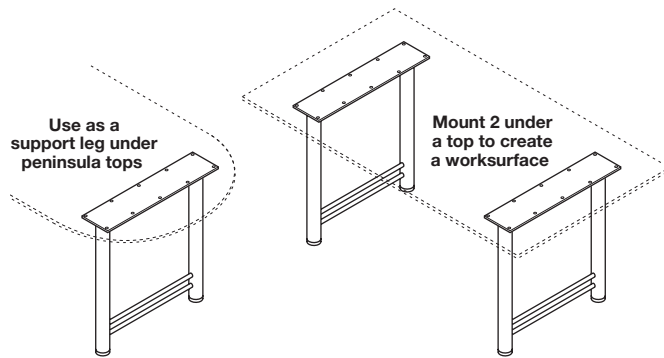



- > Side bases for desks, training tables, conference tables, etc.
- > Available in two sizes
- > Components are welded together for maximum strength
- > Individually boxed
- > Material: Steel, epoxy-coated

H-Legs 450

→ H-Legs 610

6

Casters, Feet, Legs, Table Fittings

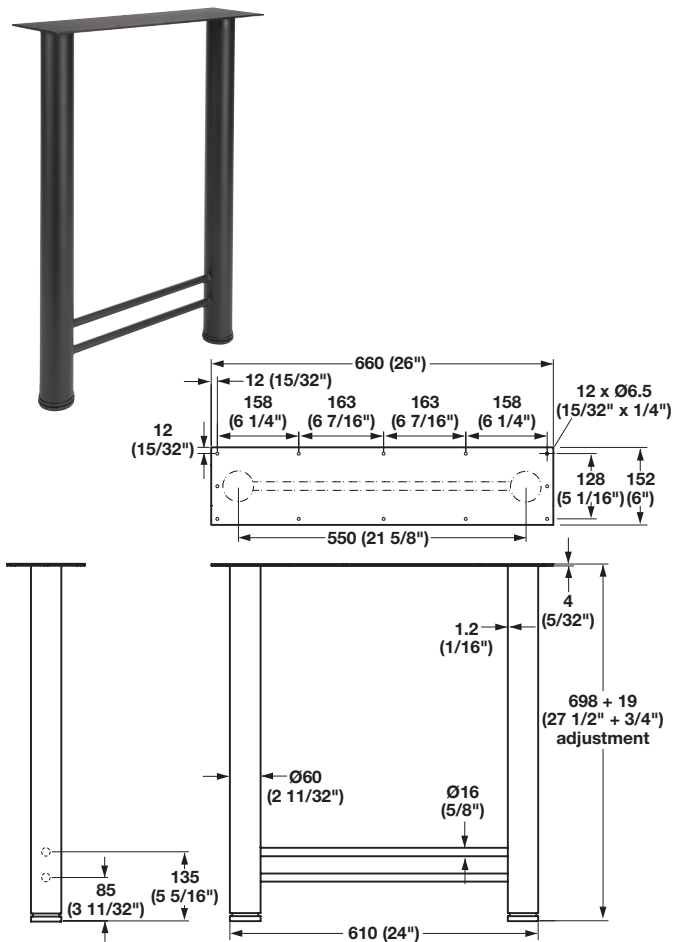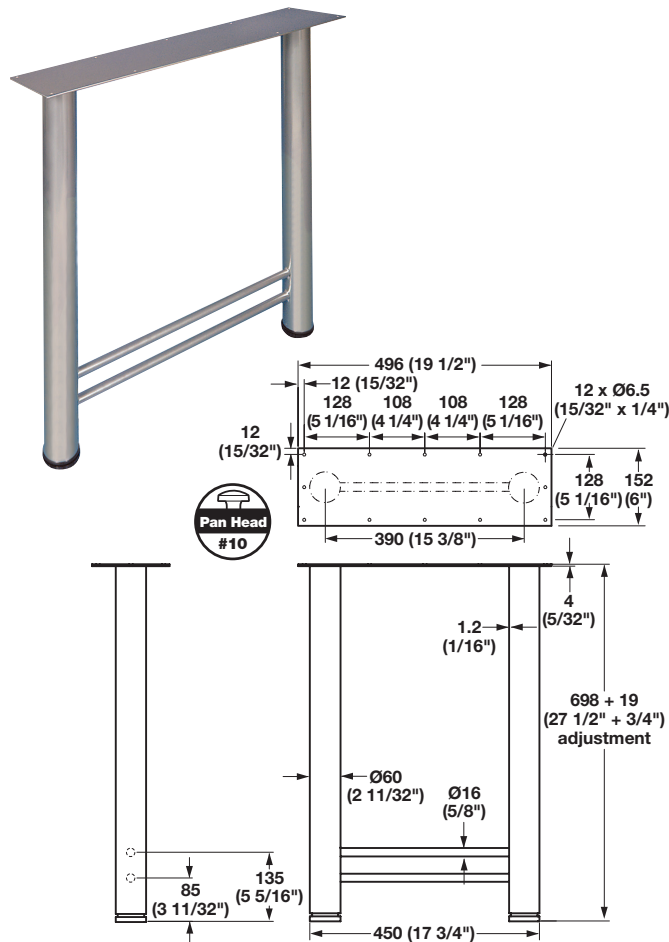

- > Feet adjustment: 19 mm (3/4")
- > Weight capacity: 250 kg (550 lbs.)
- > W x Ø: 450 x 60 mm (17 3/4" x 2 11/32")

- > Feet adjustment: 19 mm (3/4")
- > Weight capacity: 200 kg (440 lbs.)
- > W x Ø: 610 x 60 mm (24" x 2 11/32")

Finish	Item No.
silver/aluminum RAL 9006	635.73.200
black textured	635.73.300

Finish	Item No.
silver/aluminum RAL 9006	635.73.201
black textured	635.73.301

Note

Recommended for top depths: 508–711 mm (20"–28").
Top attachment screws not included.

Note


Recommended for top depths: 711–915 mm (28"–36").
Top attachment screws not included.

Pan head screws

pages 13.9–13.10

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

U-Leg

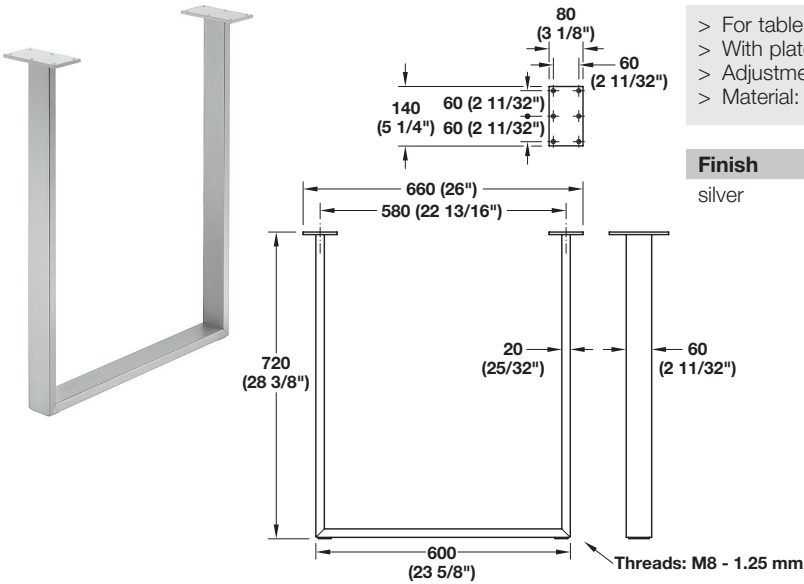


- > For table and furniture bases
- > With plate for attachment to tabletop
- > Adjustment: 10 mm (13/32")
- > Material: Steel

Finish
silver

Item No.
638.29.201

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.


Folding Table Legs

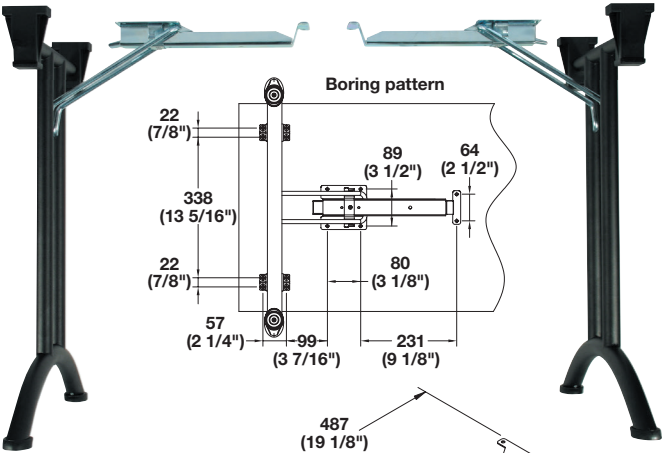

- > Legs are folded by pressing the lever
- > Once folded in, the legs are held securely by the interlocking springs
- > The upright table is protected from accidental folding
- > Leveler adjustment: 12 mm (15/32")
- > Protective plastic pad included for stacking tables
- > Functional fitting interlocks when folded in or out
- > Table length: min. 1,422 mm (4' 8")
- > Material: Legs: Steel, plated or epoxy-coated
Functional fittings: Steel; Finish: zinc-plated
Levelers & mtg. blocks: Plastic; Color: black

Finish	Item No.
silver powder-coated	642.86.231
black semi-gloss powder-coated	642.86.321


Supplied With
2 Legs
Mounting screws

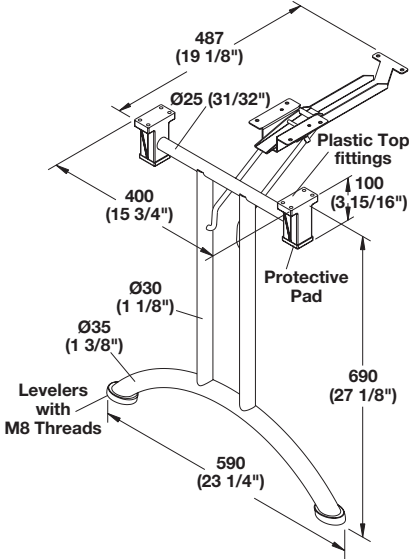

- > Push in release button to fold/unfold
- > Legs fold to the middle for easy storage
- > Ø: 50 mm (1 31/32")
- > Height: 705 mm (27 3/4")
- > Leveler adjustment: 15 mm (19/32")
- > Folded height of legs: 80 mm (3 1/8")
- > Material: Leg: Steel; Folding plate: Zinc

Finish	Item No.
black	635.64.307

Supplied With
4 Legs

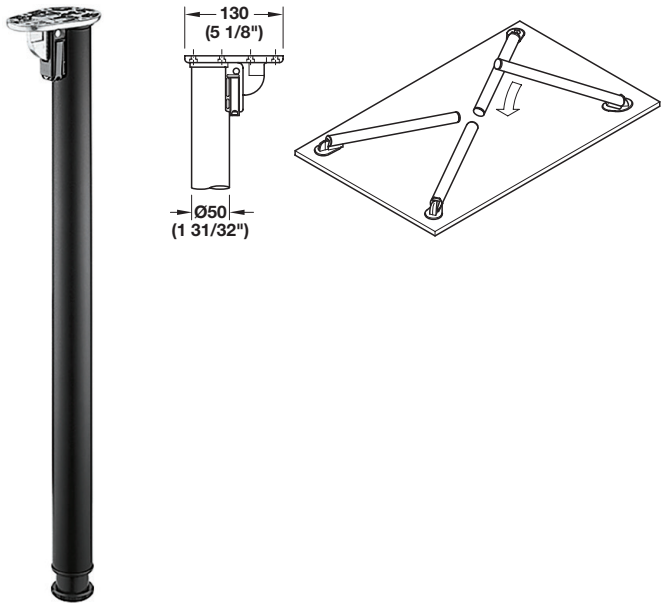

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Folding Table Legs



- > Folding table mechanism for conference rooms, training centers, etc.
- > Tables can nest together for storage
- > Folds by pulling on lever bar
- > Heavy duty weight capacity: 150 kg (330 lbs.)
- > Caster Ø: 75 mm (2 15/16")
- > Certified to European DIN EN 527-2 standard

Supplied With
4 Braking casters

Note
Tabletop is not supplied.

Please order 3 parts:

- 1) Item 642.90.300 – feet, casters, components, assembly hardware
- 2) Item 642.90.350 – vertical tubes
- 3) Choose appropriate length of horizontal stretcher

→ Feet, Casters, Components, Assembly Hardware

- > Material: End frame: Zinc Alloy; Finish: stainless steel effect
Casters: Plastic; Color: black

	Item No.
	642.90.300

→ Vertical Tubes

- > Material: Steel; Finish: black, powder-coated

	Item No.
	642.90.350

Supplied With
2 pcs.


→ Horizontal Stretchers

- > Material: Steel; Finish: black, powder-coated

Length	Item No.
680 (26 3/4")	642.90.370
880 (34 5/8")	642.90.371
1,080 (42 1/2")	642.90.372

A recommendations	B	C	D	E
1,023–1,222 (40"–48")	680 (26 3/4")	898 (35 5/8")	1,023 (40")	323 (12 3/4")
1,222–1,423 (48"–56")	880 (34 5/8")	1,098 (43 1/4")	1,222 (48")	422 (16 5/8")
1,423–1,622 (56"–72")	1,080 (42 1/2")	1,298 (51 1/8")	1,423 (56")	523 (20 5/8")

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

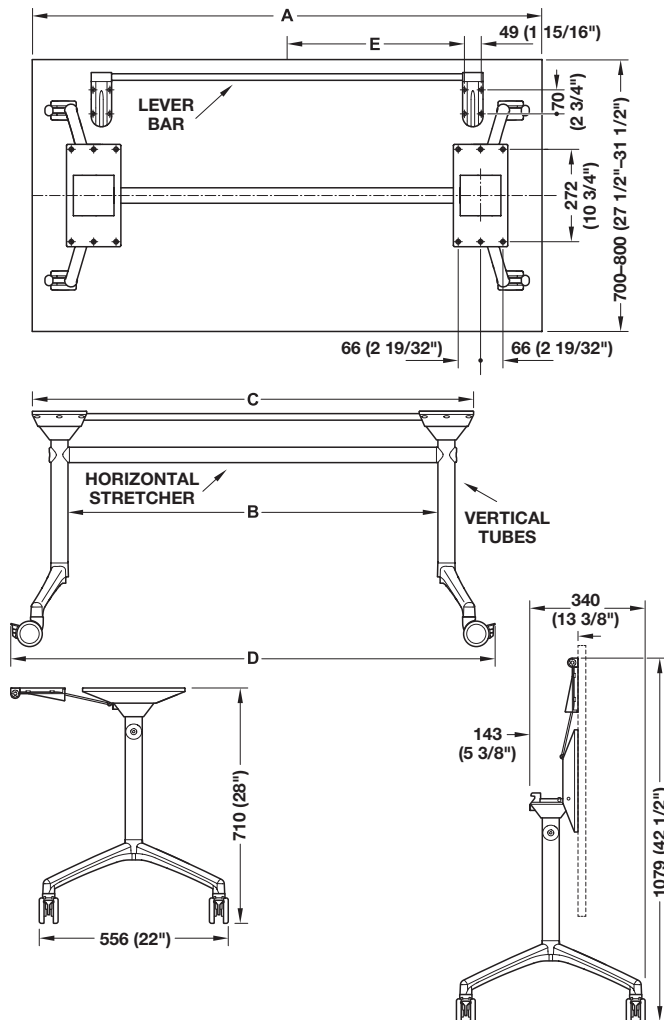


Stainless Steel Legs



- > High quality 304 grade brushed stainless steel
- > Applications: kitchens, bathrooms, garage, boats, laboratories and coastal environments where there is potential for moisture
- > Leg wall thickness: 1.5 mm (1/16")

6

Casters, Feet, Legs, Table Fittings

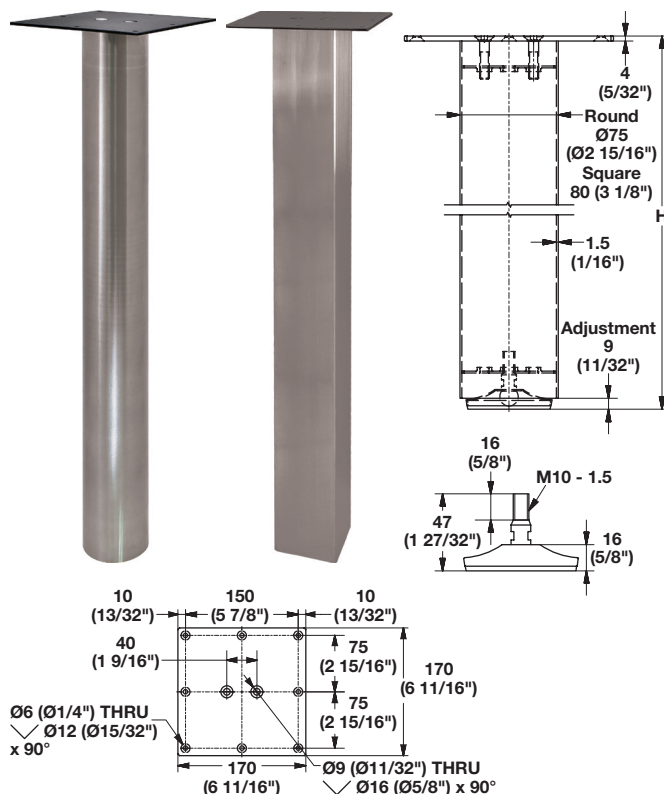


- > An optional non-adjustable foot is available if permanent anchoring of leg is required, see top right
- > Available in three heights; dining, counter or bar heights
- > Adjustable leveler adjustment: 10 mm (13/32")
- > Material: Legs: 304 Stainless Steel
Mounting Plate: Steel; Finish: black powder-coated

Height	Round Ø60 mm (2 3/8")	Round Ø75 mm (2 15/16")	Square 50 mm (1 31/32")	Square 80 mm (3 1/8")
716 (28 3/16")	635.70.003	635.70.000	635.70.013	635.70.010
883 (34 3/4")	635.70.004	635.70.001	635.70.014	635.70.011
1,035 (40 3/4")	635.70.005	635.70.002	635.70.015	635.70.012

Supplied With

Leg, Mounting plate, Adjustable leveler

→ Anchoring Foot, optional




- > Non-adjustable foot allows for permanent anchoring of table legs, round or square
- > Ideal option for supporting solid surface tops when both upper and lower portion of the leg needs to be anchored securely
- > Material: Stainless Steel

Item No.

635.70.093

→ Mini Legs

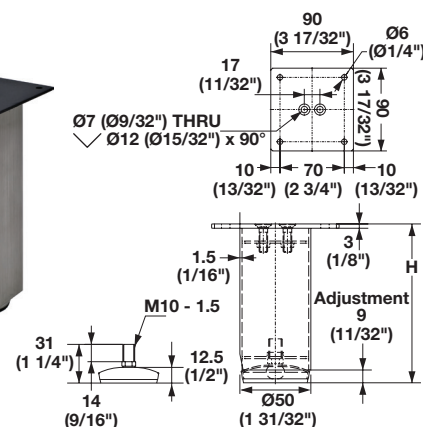

- > Square or round cross section: 50 mm (1 31/32")
- > Adjustable leveler adjustment: 10 mm (13/32")
- > Material: Legs: 304 Stainless Steel
Mounting Plate: Steel; Finish: black powder-coated


Height	Round	Square
100 (3 15/16")	635.70.020	635.70.030
152 (6")	635.70.021	635.70.031
203 (8")	635.70.022	635.70.032

Supplied With

Leg, Mounting plate, Adjustable leveler

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Stainless Steel Fixed Columns

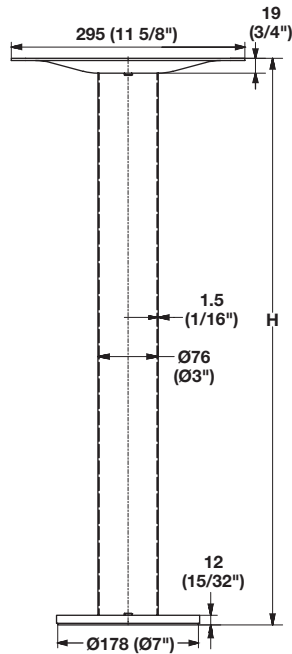

- > Bolts down
- > Ideal for countertop and/or bar supports
- > Column Ø: 76 mm (3")
- > Base Ø: 178 mm (7")
- > Material: Steel

Height

716 (28 3/16")

883 (34 3/4")

1,035 (40 3/4")

Item No.

635.70.090



635.70.091

635.70.092

Supplied With

Leg

Modular components

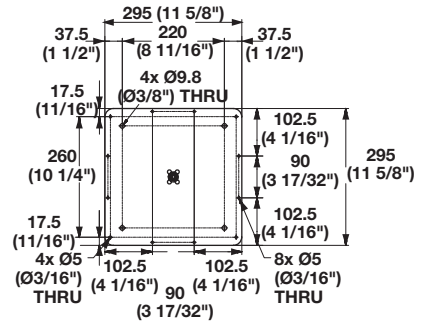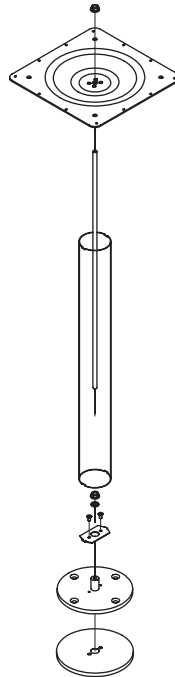

Pull-Out Table Fittings with Folding Legs





- > A pull-out table system that can be installed in a drawer space
- > With a fold-down support leg
- > For kitchen and living room furniture
- > Seats up to 5 people
- > Installation depth: min. 562 mm (22 1/8")
- > Internal installation height: 83 mm (3 1/4") + 3 x top thickness
- > 3 top leaves dimensions: 529, 445 and 445 mm (20 7/8", 17 1/2" and 17 1/2")
- > Weight capacity: 60 kg (132 lbs.)
- > Material: Guide profiles: Aluminum; Finish: silver colored anodized
 Table leg: Steel; Finish: white aluminum

Internal installation width	Item No.
562 (22 1/8")	642.19.927
862 (34")	642.19.928
1,162 (45 3/4")	642.19.929

Note

Successful installation of this fitting requires a high degree of skill. Precise location of mounting holes and milling the hinges for folding tops is critical, CNC equipment is recommended. Tabletops are not supplied. High quality material should be used for folding tops to insure they can withstand the folding procedure. Hinges for fold down drawer front are not supplied. Folding table hinges are not supplied, 6 are required, see page **9.100**.

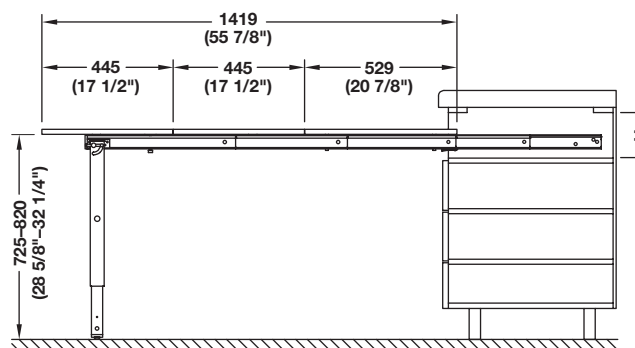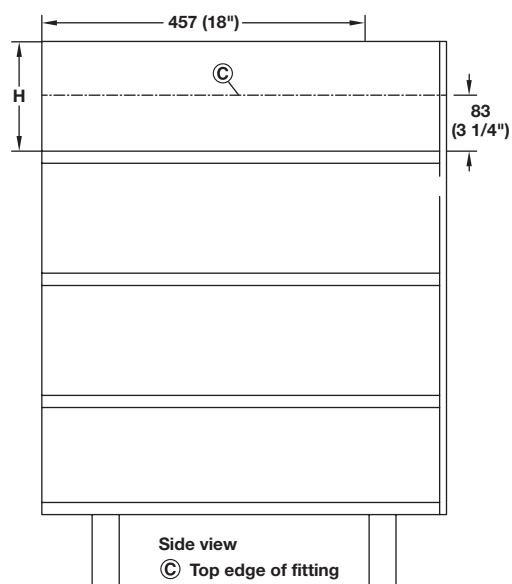

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.


STAR Adjustable Table Base

The STAR Adjustable Table 2-Leg System from Häfele is an extremely robust adjustable table base. With BIFMA approved 3 segment columns, the adjustment range meets all ergonomically correct height ranges. STAR tables are made in the USA.

With an integrated Collision Protection System for safety:

- 1). **AMP Draw** - If the control box detects that any of the legs receive a spike in amp-draw due to, for example, something hitting the table, the table will reverse direction to avoid damage.
- 2). **Gyro Sensor** - This internal sensor will detect the following:
 - > Sudden change in speed (up or down)
 - > Sudden change in the desk angle (up or down)
 - > An impact to the worksurface (up or down)

→ 2-Leg System

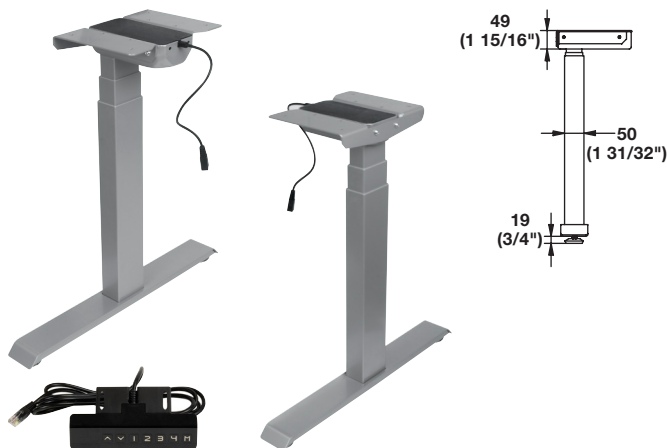

- > Weight capacity with top: 127 kg (280 lbs.)
- > Recommended for: top widths: 914–1,829 mm (36"–72")
top depths: 610–762 mm (24"–30")
- > With 3-stage adjustable columns
- > With 4-setting programmable switch
- > Height adjustment range: 552–1,200 mm (21 3/4"–47 1/4")
- > Stroke: 648 mm (25 1/2")
- > Speed/sec.: 40 mm (1 9/16")
- > Meets BIFMA X5.5 standards and is UL 962 recognized
- > Anti-sag bar recommended for top width over 1,549 mm (61")


Color	Item No.
black	637.45.280
silver	637.45.281
white	637.45.282

Supplied With


2 Adjustable columns
2 Top support plates
2 Feet
Programmable switch
Control box, wiring and assembly hardware

Note

Weight capacity is based on an evenly distributed load over tabletop. Please provide at least 26 mm (1 1/32") space between tabletop and any adjoining surfaces, cabinets, etc. For mounting instructions and trouble shooting guides go to www.hafele.com

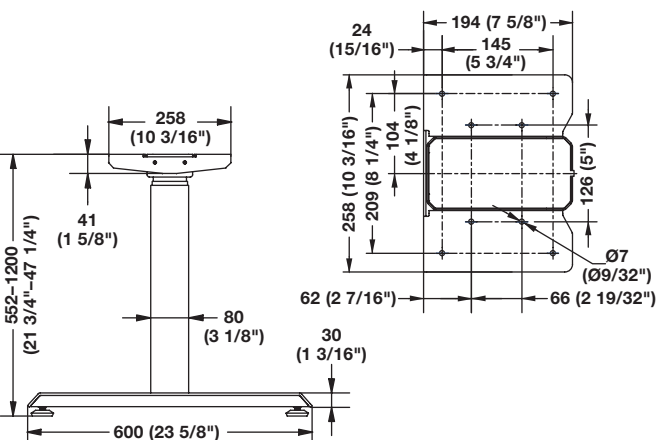

→ Anti-Sag Bar, optional

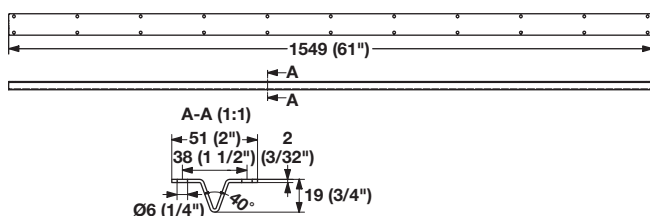

- > For top width over 1,549 mm (61") to keep top from sagging

Finish	Item No.
black	630.46.382

STAR Adjustable Table Base

The STAR Adjustable Table 3-Leg System from Häfele is designed for corner table workstations. Features an adjustable width support beam, adjustment range 1,080–1,800 mm (42 1/2"–71") and a floating 3rd leg fixed beam at 502 mm (19 3/4"). With BIFMA approved 3 segment columns, the adjustment range meets all ergonomically correct height ranges. STAR tables are made in the USA.

With an integrated Collision Protection System for safety:

- 1). **AMP Draw** - If the control box detects that any of the legs receive a spike in amp-draw due to, for example, something hitting the table, the table will reverse direction to avoid damage.
- 2). **Gyro Sensor** - This internal sensor will detect the following:
 - > Sudden change in speed (up or down)
 - > Sudden change in the desk angle (up or down)
 - > An impact to the worksurface (up or down)

→ 3-Leg System

6

Casters, Feet, Legs, Table Fittings



- > Weight capacity with top: 152 kg (335 lbs.)
- > Recommended for: top widths: 914–2,134 mm (36"–84")
top depths: 610–762 mm (24"–30")
- > With 3-stage adjustable columns
- > With 4-setting programmable switch
- > Height adjustment range without top thickness: 552–1,200 mm (21 3/4"–47 1/4")
- > Stroke: 648 mm (25 1/2")
- > Speed/sec.: 40 mm (1 9/16")
- > Meets BIFMA X5.5 standards and is UL 962 recognized



Color	Item No.
black	637.45.296
silver	637.45.297

Supplied With

3 Adjustable columns
Support beams
3 Top support plates
2 Feet
Programmable switch
Control box, wiring and assembly hardware

Note

Weight capacity is based on an evenly distributed load over tabletop. Please provide at least 26 mm (1 1/32") space between tabletop and any adjoining surfaces, cabinets, etc. For mounting instructions and trouble shooting guides go to www.hafele.com

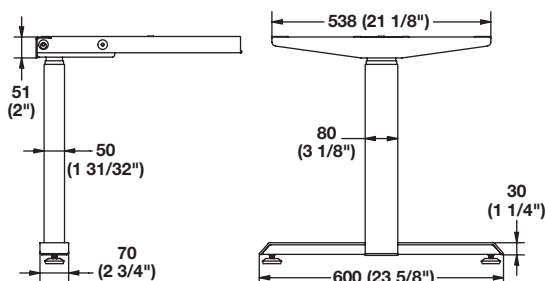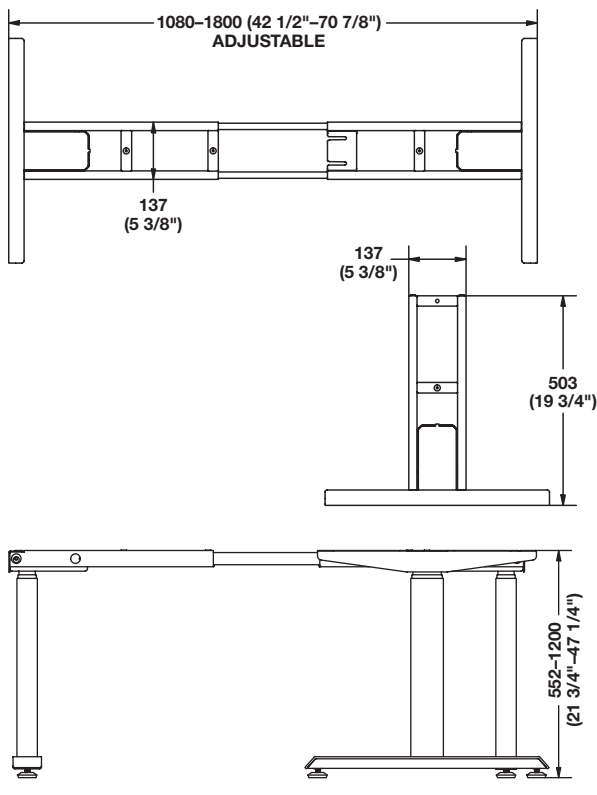



Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

STAR Single Column Side-Mount System

The STAR adjustable single column side-mounted system is designed for small top applications such as speaking pedestals, small writing tables, etc. The column comes with a welded-on side bracket which is to be screw or bolt mounted to a panel. STAR tables are made in the USA.

With an integrated Collision Protection System for safety:

- 1). **AMP Draw** - If the control box detects that any of the legs receive a spike in amp-draw due to, for example, something hitting the table, the table will reverse direction to avoid damage.
- 2). **Gyro Sensor** - This internal sensor will detect the following:
 - > Sudden change in speed (up or down)
 - > Sudden change in the desk angle (up or down)
 - > An impact to the worksurface (up or down)

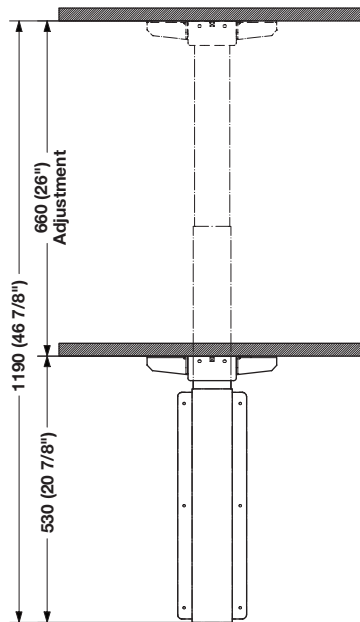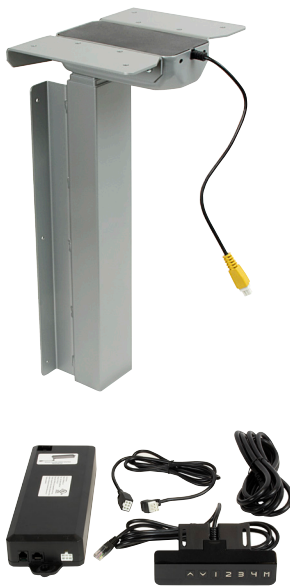


- > Weight capacity with top: 77 kg (170 lbs.)
- > With 3-stage adjustable column
- > With 4-setting programmable switch
- > Height adjustment range without top thickness: 530–1,191 mm (20 7/8"–46 7/8")
- > Stroke: 660 mm (26")
- > Speed/sec.: 40 mm (1 9/16")
- > Meets BIFMA X5.5 standards and is UL 962 recognized

Finish	Item No.
silver RAL 9006	637.45.292
black RAL 9011	637.45.293

Supplied With
 Adjustable column with welded-on bracket
 Top support
 Programmable switch
 Single port control box
 Wiring and assembly hardware

Note

This single adjustable column cannot be paired or synchronized with additional columns. Make sure column is securely fastened to the panel, through bolts are recommended. For mounting instructions and trouble shooting guides go to www.hafele.com

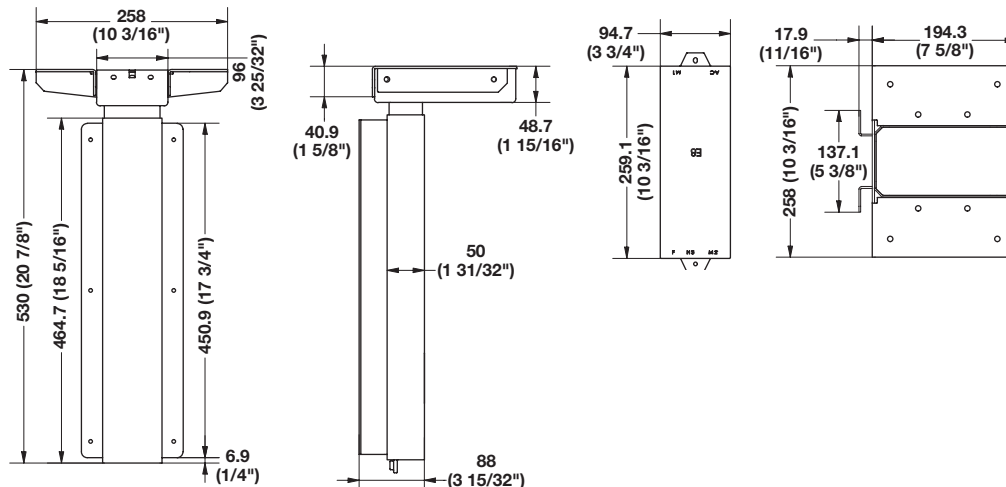

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

STAR Double Column Side-Mount System



The STAR adjustable double column side-mounted system is designed to be mounted between 2 side panels or hidden inside a "wood box". The columns come with welded-on side brackets for screw or bolt mounting to the panels. An adjustable width support beam provides mounting flexibility. STAR tables are made in the USA.

With an integrated Collision Protection System for safety:

- 1). **AMP Draw** - If the control box detects that any of the legs receive a spike in amp-draw due to, for example, something hitting the table, the table will reverse direction to avoid damage.
- 2). **Gyro Sensor** - This internal sensor will detect the following:
 - > Sudden change in speed (up or down)
 - > Sudden change in the desk angle (up or down)
 - > An impact to the worksurface (up or down)



- > Weight capacity with top: 127 kg (280 lbs.)
- > Recommended for: top widths: 1,219–1,930 mm (48"–76")
top depths: 610–762 mm (24"–30")
- > With 3-stage adjustable columns
- > With 4-setting programmable switch
- > Adjustable width support beam adjustment range: 1,080–1,800 mm (42 1/2"–71")
- > Height adjustment range without top thickness: 530–1,191 mm (20 7/8"–46 7/8")
- > Stroke: 660 mm (26 1/32")
- > Speed/sec.: 40 mm (1 9/16")
- > Meets BIFMA X5.5 standards and is UL 962 recognized




Finish	Item No.
silver RAL 9006	637.45.294
black RAL 9011	637.45.295

Supplied With

2 adjustable columns with welded-on mounting brackets
 Top supports and adjustable support channel
 Double port control box
 Programmable switch
 Wiring and assembly hardware


Note

Make sure column is securely fastened to the panels, through bolts are recommended. Weight capacity is based on an evenly distributed load over the tabletop. For mounting instructions and trouble shooting guides go to www.hafele.com

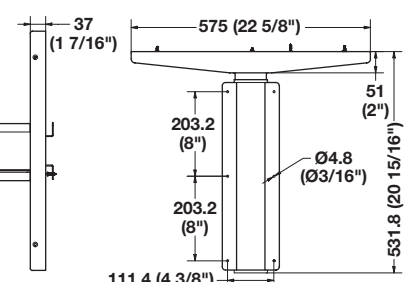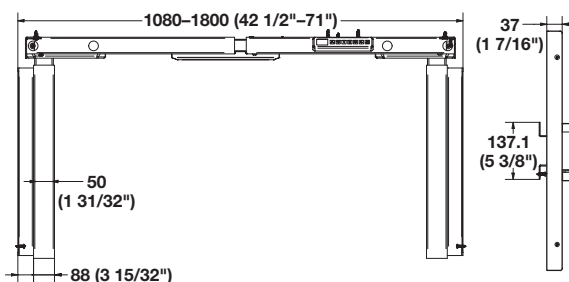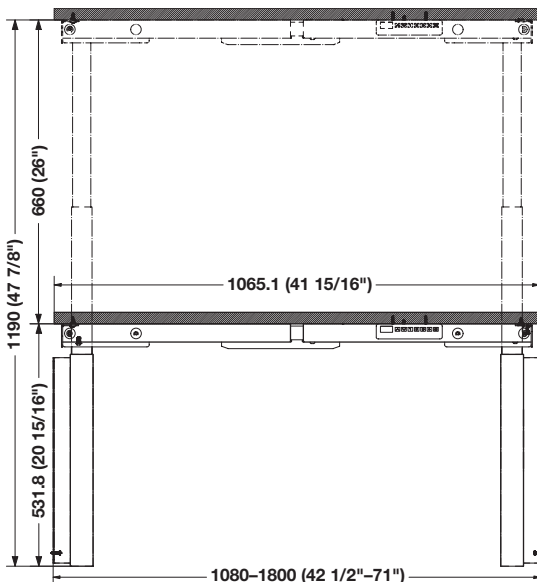


Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Glides




- > Nail length: approximately 19 mm (3/4")
- > Material: Plastic




- > Nail length: approximately 19 mm (3/4")
- > Material: Steel; Finish: nickel-plated

Glide Ø	Mounting height	white	brown
10 (13/32")	4 (5/32")	650.02.100	-
13 (1/2")	4.5 (3/16")	650.02.137	650.02.147
16 (5/8")	6 (1/4")	650.02.164	650.02.174
19 (3/4")	6 (1/4")	650.02.191	650.02.199
22 (7/8")	6 (1/4")	650.02.226	650.02.236
25 (31/32")	6 (1/4")	650.02.250	650.02.260

Glide Ø	Mounting height	Item No.
13 (1/2")	3.5 (5/32")	650.01.130
15 (19/32")	3.5 (5/32")	650.01.158
18 (23/32")	3.5 (5/32")	650.01.185
20 (25/32")	3.5 (5/32")	650.01.201
25 (31/32")	4.5 (3/16")	650.01.256



- > Nail length: approximately 19 mm (3/4")
- > Width: 44 mm (1 3/4")
- > Material: Plastic; Color: white



- > Screw length: approximately 16 mm (5/8")
- > Material: Plastic/Felt; Color: gray/natural


Height	Item No.
16 (5/8")	650.05.716
19 (3/4")	650.05.719

Glide Ø	Item No.
20 (25/32")	650.20.720
24 (15/16")	650.20.724
28 (1 1/8")	650.20.728

Supplied With

3.5 x 20 mm steel, galvanized flat head screws

Corner Protector

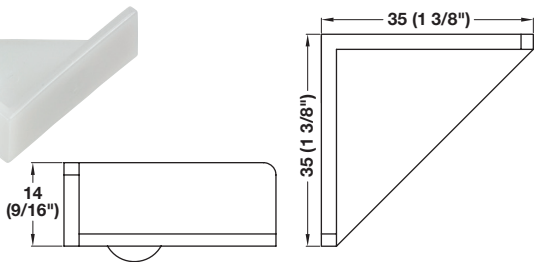

- > With floor-guide bump
- > Material: Plastic (Polyethylene)

Color	Item No.
white	650.09.703


Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Casters, Feet, Legs, Table Fittings

PAGE RESERVED FOR
NEW PRODUCT


Glides

- > Economically priced glides meet all the requirements of high quality furniture glides
- > Minimal contact pressure due to flat base and easy movement with radiused edges
- > Especially suitable for upholstered furniture
- > Static weight capacity/glide: approximately 50 kg (110 lbs.)
- > Material: Plastic; Color: black




Height
20 (25/32")

Item No.
635.80.315



Height
25 (31/32")
40 (1 9/16")

Item No.
635.80.325
635.80.343

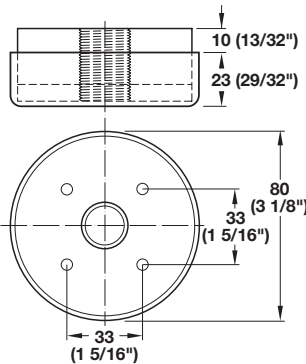

- > Vertically adjustable: 23–33 mm (29/32"–1 5/16")
- > Extra large contact area prevents furniture from sinking into the floor covering; provides effortless movement
- > Hard abrasion proof surface, suitable for carpets
- > Material: Plastic


Color
black

Item No.
635.83.308

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Flat head screws	pages 13.7-13.8, 13.10, 13.13
Pan head screws	pages 13.9-13.10

Levelers

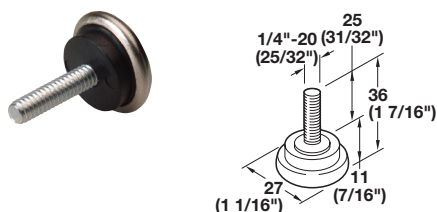


- > Threaded stem: 1/4"-20 x 25 mm (25/32" x 31/32")
- > Material: Steel

Finish

nickel-plated

Item No.

651.13.906

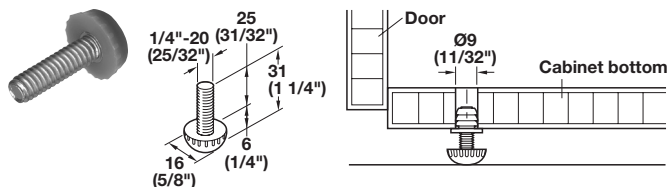

- > Threaded stem: 1/4"-20 x 25 mm (25/32" x 31/32")
- > Material: Steel; Finish: zinc-plated; Base: Plastic

Base color

brown

black


white

Item No.

637.05.108

637.05.308

637.05.708

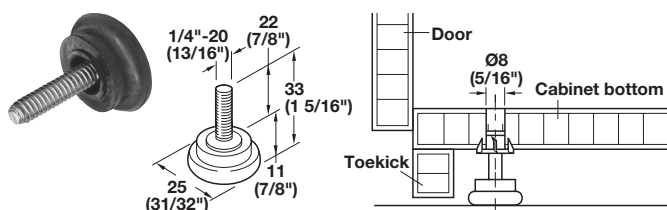

- > Threaded stem: 1/4"-20 x 22 mm (25/32" x 7/8")
- > Material: Steel; Finish: zinc-plated; Base: Plastic


Base color

black

Item No.

651.04.332

→ T-Nut



- > 1/4"-20 x 10 mm (25/32" x 13/32")
- > Material: Steel


Finish

zinc-plated

Item No.

031.05.968

→ Knock-in Stem




- > 1/4"-20 x 11 mm (25/32" x 7/16")
- > Material: Brass

Item No.

039.02.065

Furniture Wedges

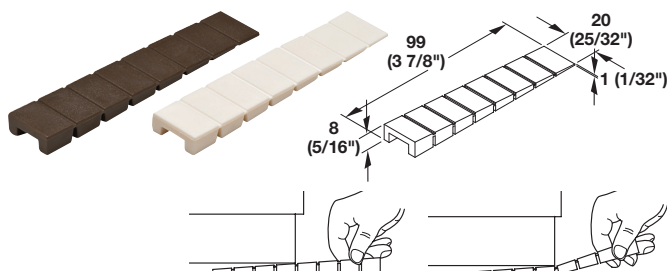

- > Perfectly levels furniture
- > Place the strip under furniture to level, then snap off the sections
- > Sections can be broken off from 1–8 mm (1/32"–5/16")
- > Material: Plastic

Color

brown


white

Item No.

006.90.900


006.90.920

Base Levelers

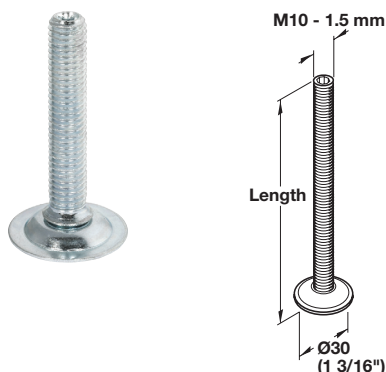


- > M10
- > With swiveling base plate and 5 mm (3/16") hexagon socket
- > Material: Steel; Finish: zinc-plated

Length	Item No.
60 (2 11/32")	637.03.009
70 (2 3/4")	637.03.018
80 (3 1/8")	637.03.027
90 (3 17/32")	637.03.036
100 (3 15/16")	637.03.045
120 (4 3/4")	637.03.054

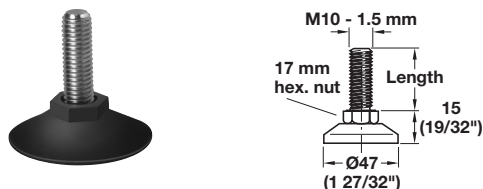

- > M10
- > With fixed foot
- > Material: Thread: Steel; Finish: zinc-plated; Foot: Plastic; Color: black

Length	Item No.
30 (1 1/8")	651.01.304
50 (1 15/16")	651.01.500

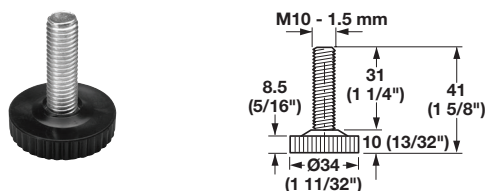

- > M10
- > Material: Thread: Steel; Foot: Nylon; Color: black


Finish	Item No.
zinc-plated	651.01.330

→ Protective Cap, optional




- > Snaps over swiveling base plate on left, order separately
- > Material: Plastic

Color	Item No.
white	637.02.090

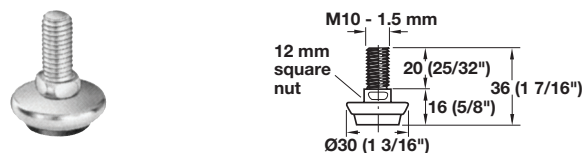


- > M10
- > Material: Steel; Base: Rubber; Color: black

Finish	Item No.
zinc-plated	651.02.919

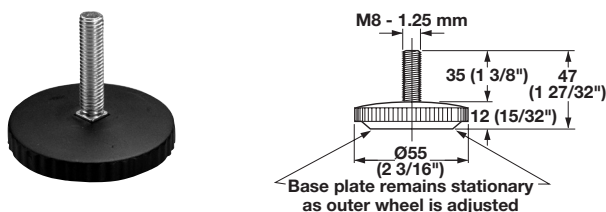

- > M8
- > Material: Thread: Steel; Foot: Nylon; Color: black


Finish	Item No.
zinc-plated	651.06.300

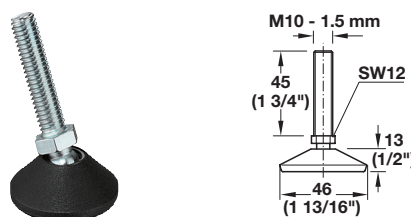


- > M10
- > Swivels with ball joint
- > Material: Thread: Steel; Foot: Plastic; Color: black

Finish	Item No.
zinc-plated	651.00.125

Base Levelers

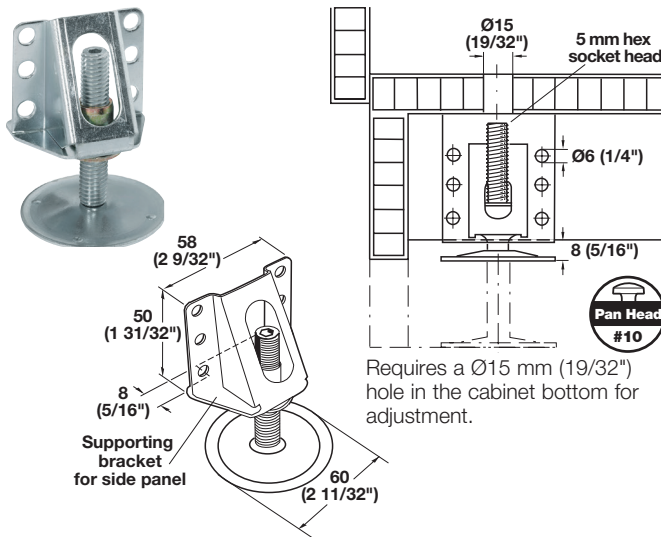

Requires a Ø15 mm (19/32") hole in the cabinet bottom for adjustment.

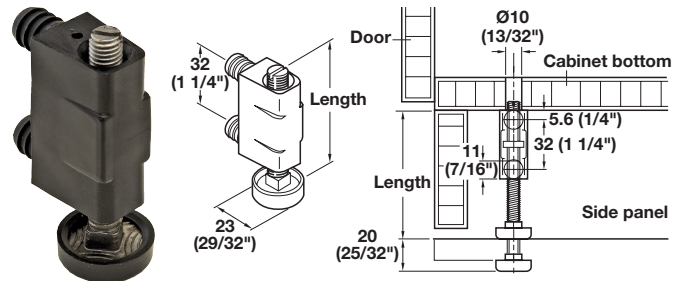

Adjusts from above through a hole in cabinet bottom and from below with an open-ended wrench.

- > With press fit plugs
- > Installation height: min. 50 mm (1 31/32")
- > Adjustment range: +20 mm (25/32")
- > Weight capacity: 50 kg (110 lbs.)
- > Material: Leveler/Cap: Plastic; Color: black
- Bolt: Steel; Finish: zinc-plated


Length	Item No.
60 (2 3/8")	637.11.320
80 (3 3/16")	637.11.348

Supplied With
M8 bolt with slotted head
Base plate with cap

- > Heavy duty
- > With supporting bracket
- > Screw mounted
- > Installation height: min. 70 mm (2 3/4")
- > Adjustment range: +45 mm (1 3/4")
- > Weight capacity: 200 kg (440 lbs)
- > Material: Steel


Finish	Item No.
zinc-plated	637.67.900

Supplied With
M12 X 65 (2 9/16") bolt with M5 mm hexagonal socket head
Base plate

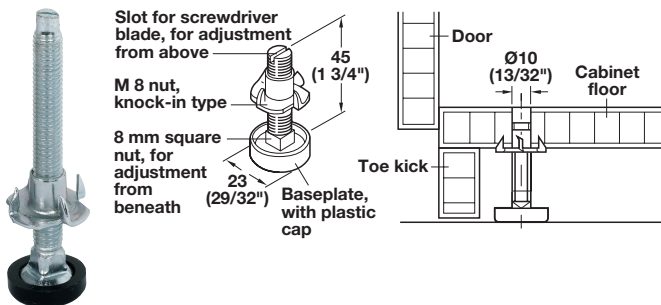

- > M8 X 45 mm (1 3/4")
- > With T-nut
- > Material: Steel; Finish: zinc-plated; Cap: Plastic


Cap color	Item No.
white	637.05.000
black	637.05.300

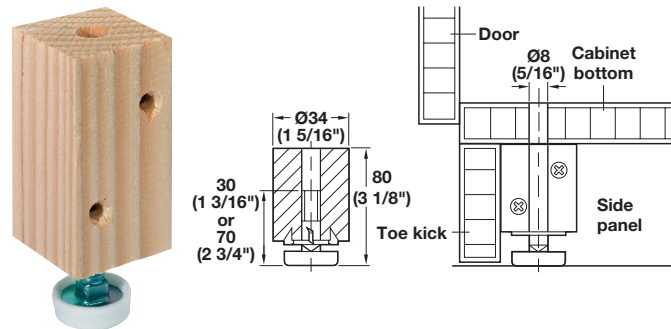

- > With screw: M8 x 70 mm (2 3/4")
- > Material: Steel; Finish: zinc-plated; Mounting block: Wood
- Cap: Plastic; Color: white

Cap color	Item No.
white	637.12.265


Base Levelers

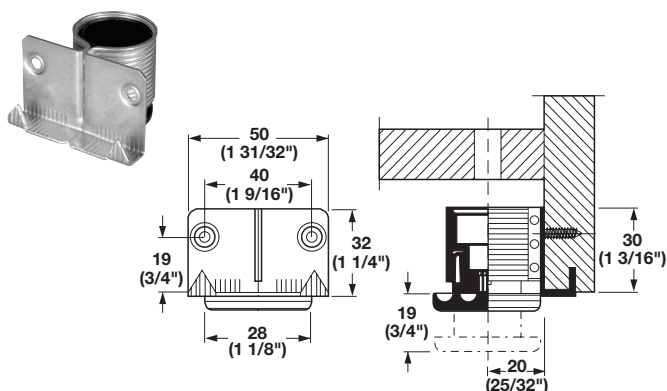

- > With pound in prongs
- > Screw mounted
- > Adjusts with flat bladed screwdriver
- > Weight capacity: 100 kg (220 lbs.)
- > Material: Steel, galvanized
- Internal element & foot: Plastic; Color: black

Item No.


637.42.905

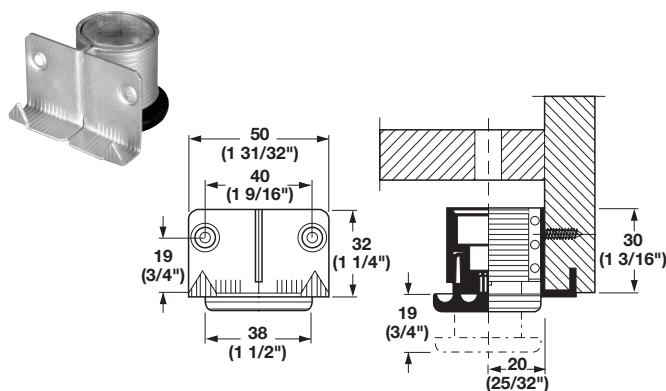

- > Heavy duty
- > With pound in prongs
- > Screw mounted
- > Adjusts with 6 mm (1/4\") hex key, order separately
- > Weight capacity: 150 kg (330 lbs.)
- > Material: Steel, galvanized; Internal element: Zinc
- Foot: Plastic; Color: black

Item No.


637.42.950

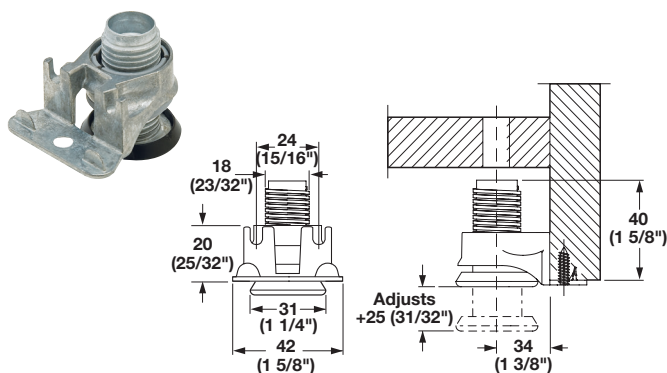

- > With pound in prongs
- > Screw mounted
- > Adjusts with 6 mm (1/4\") hex key, flat-bladed or phillips screwdriver
- > Integrated glide functions independently of the foot for easier adjustment and preventing damage to floors
- > Weight capacity: 175 kg (385 lbs.)
- > Material: Zinc, unfinished; Foot: Plastic; Color: black

Item No.

637.67.910

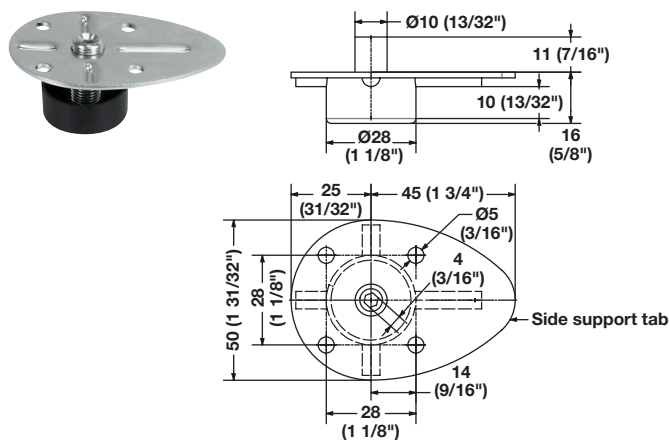


- > Low profile height: 16 mm (5/8\")
- > With cabinet side supporting tab
- > Adjust through the top with a 4 mm hex key, order separately
- > Weight capacity: 200 kg (440 lbs.)
- > Material: Steel/Plastic

Item No.

637.19.222

Base Levelers

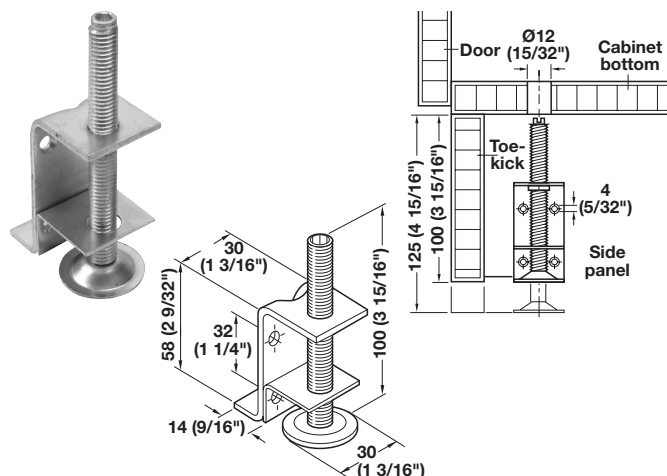

- > With supporting bracket
- > Screw mounted
- > Installation height: min. 100 mm (3 15/16")
- > Adjusts with M5 hex key
- > Adjustment range: +32 mm (1 1/4")
- > Weight capacity: 150 kg (330 lbs.)
- > Material: Steel

Finish

zinc-plated

Item No.


637.31.941

Supplied With

M10 X 100 mm (4") bolt
Swiveling base plate

Note

Order protective cap separately, above right.

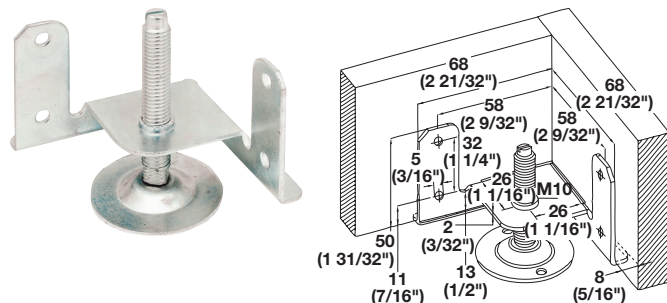

- > With supporting bracket
- > Groove or screw mounted
- > Adjustment: +50 mm (1 31/32")
- > Weight capacity: 150 kg (330 lbs.)
- > Material: Steel

Finish

zinc-plated


Item No.

637.63.900

Supplied With

M10 x 70 mm (2 3/4") bolt with slotted head
Base plate Ø45 mm (1 3/4")

→ Protective Cap, optional





- > Snaps over swiveling base plate on left, order separately
- > Material: Plastic

Color

white

Item No.

637.02.090

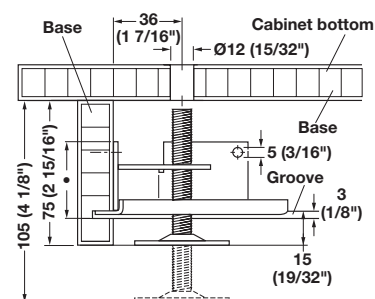

- > With supporting bracket
- > Groove or screw mounted
- > Installation height: min. 75 mm (2 15/16")
- > Adjustment range: +30 mm (1 1/8")
- > Weight capacity: 150 kg (330 lbs.)
- > Material: Steel

Finish



zinc-plated

Item No.

637.23.900

Supplied With

Threaded bolt M10 x 65 mm (2 9/16"), Hexagon socket M5
Swiveling base plate Ø50 mm (1 15/16")

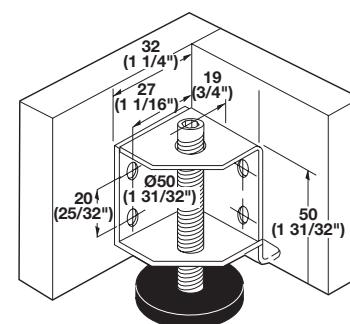

- > With corner support
- > Foot plate swivels for uneven surfaces
- > Adjustment: 20 mm (25/32")
- > Weight capacity: 150 kg (330 lbs.)
- > Material: Steel; Cap: Plastic

Finish

zinc-plated

Item No.



637.37.904

Supplied With

M8 x 70 mm (2 3/4") bolt with M4 hexagonal socket head
Base plate Ø34 mm (1 5/16") with cap
2 Left/Right levelers

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Leveler/Caster Combo

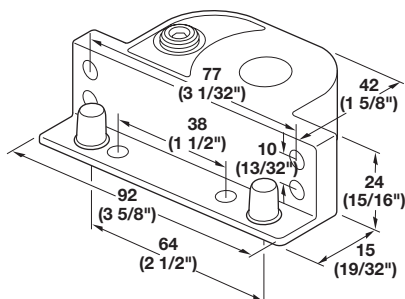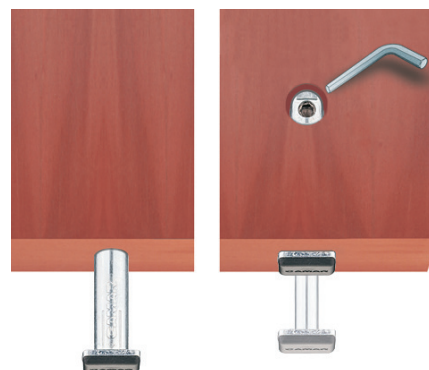

- > Innovative design for furniture applications
- > Allows both mobility and leveling in a single unit
- > Unit is handed and used in pairs
- > Caster pivots 360°
- > Screw mounted
- > Adjusts with M4 hex key, order separately
- > Adjustment range: +15 mm (19/32")
- > Weight capacity: 120 kg (264 lbs.) as caster
200 kg (440 lbs.) as leveler
- > Material: Housing: Nylon with glass fibers; Leveler: Steel

Finish

black



Item No.

651.00.300

Supplied With

Right/left units

Insert Levelers

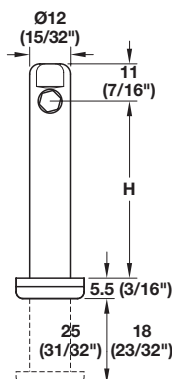

- > Hexagon socket drive SW4 at side
- > Height adjustment: +25 mm (31/32") + 18 mm (23/32")
with height 32 mm (1 1/4")
- > Weight capacity: approximately 300 kg (661 lbs.)
- > Material: Zinc Alloy, unfinished

Height


Drilling depth

Item No.

32 (1 1/4")	43 (1 11/16")	637.24.021
52 (2 1/16")	63 (2 3/161")	637.24.022
70 (2 3/4")	81 (3 3/16")	637.24.023
100 (1 15/16")	111 (4 3/8")	637.24.024
120 (4 3/4")	131 (5 5/32")	637.24.025



Note

Drilling Depth = Height + 11 mm (7/16")




Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

U-Brackets




- > Slightly oversized to allow for material thickness tolerances
- > Holes on one side for fastening
- > Material: Steel, epoxy-coated; Finish: black




6

Casters, Feet, Legs, Table Fittings

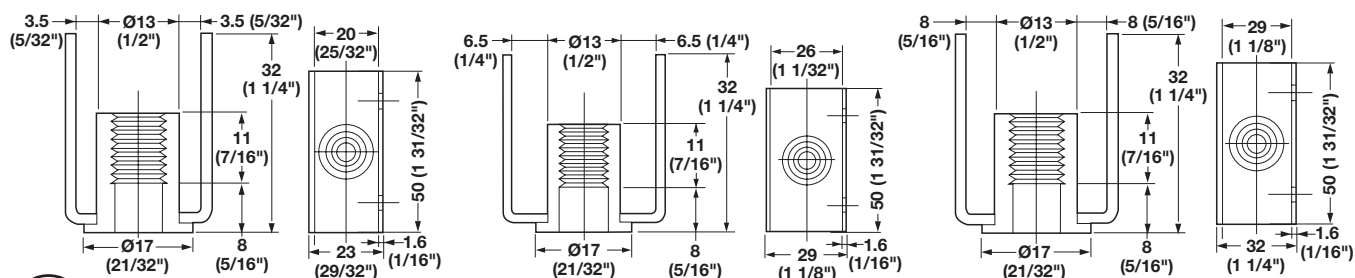

Thread Size	19 mm (3/4") material	25 mm (31/32") material	28 mm (1 1/8") material
1/4"-20	637.95.311	637.95.321	-
5/16"-18	637.95.312	-	-
M10-1.5 mm	637.95.314	637.95.324	637.95.334

Threaded Plate

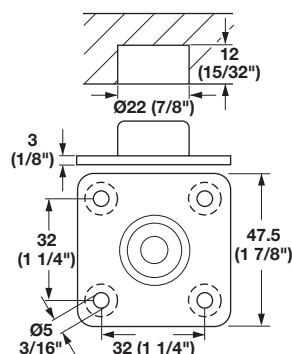


- > Screw mounted
- > With internal thread: M10-1.5 mm (1/16")
- > Heavy duty for levelers or casters
- > Material: Zinc, plated; Internal thread element: Steel

Finish	Item No.
nickel-plated	637.07.910
Supplied With	
50 pcs.	

Accessories

M10 Bracket

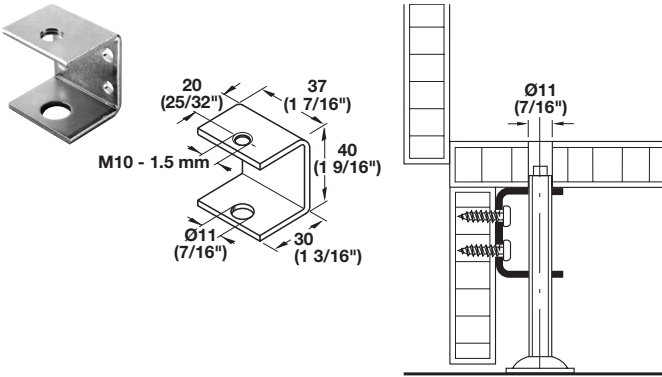


- > Screw mounted
- > Material: Steel

Finish
zinc-plated

Item No.
637.07.004

M10 Plate

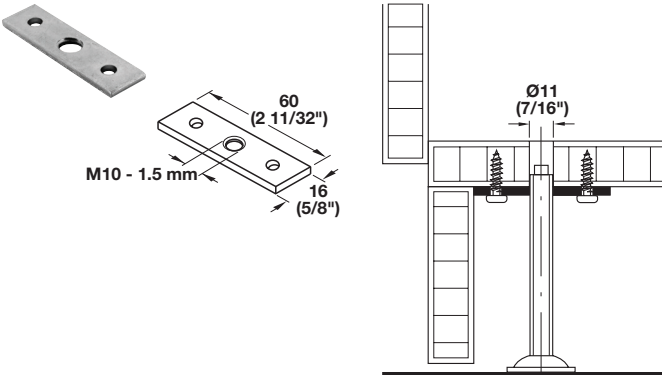


- > Screw mounted
- > Material: Steel

Finish
zinc-plated

Item No.
637.09.008

M10 T-Nut

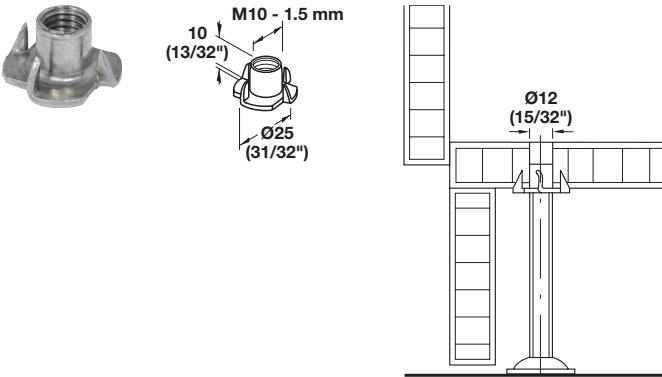

- > Material: Steel, galvanized

Item No.
031.00.490

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.




Tabletop Swivel Fitting



- > Solution for small rooms such as home offices, waiting rooms, meeting rooms, children's rooms or dining rooms
- > One piece of furniture with two functions: sideboard or table
- > The entire storage space inside the cabinet can be used
- > For cabinets with inset doors and drawers
- > Width: max. 1,200 mm (47 1/4")
- > Depth T: max. 600 mm (23 5/8")
- > Panel thickness: Top panel: max. 25 mm (31/32")
Side panel: max. 28 mm (1 1/8")
- > Door thickness: max. 25 mm (31/32")

6

Casters, Feet, Legs, Table Fittings

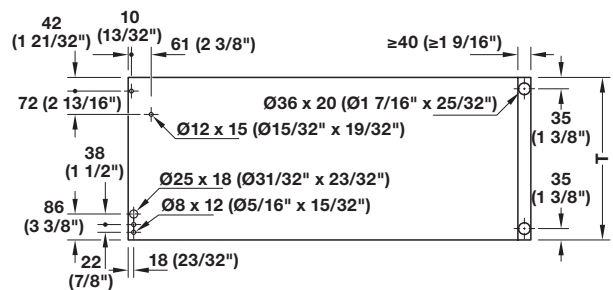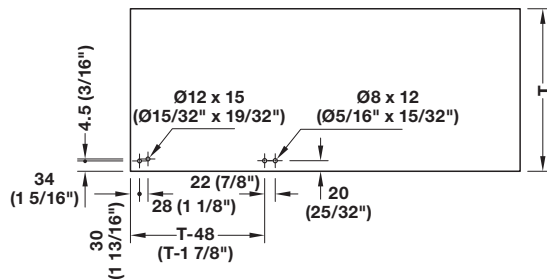

L = Length

600 (23 5/8")	700 (27 9/16")	800 (31 1/2")	900 (35 7/16")	1,000 (39 3/8")	1,100 (43 5/16")	1,200 (47 1/4")
---------------	----------------	---------------	----------------	-----------------	------------------	-----------------

T = Depth

Dimension A

300 (11 13/16")	76 (3")	67 (2 5/8")	59 (2 5/16")	54 (2 1/8")	49 (1 15/16")	45 (1 25/32")	42 (1 21/32")
350 (13 25/32")	100 (3 15/16")	88 (3 15/32")	78 (3 1/8")	71 (2 25/32")	64 (2 17/32")	59 (2 5/16")	55 (2 5/32")
400 (15 3/4")	126 (4 15/16")	111 (4 3/8")	99 (3 15/16")	90 (3 17/32")	82 (3 7/32")	75 (2 15/16")	70 (2 3/4")
450 (17 23/32")	155 (6 3/32")	137 (5 3/8")	123 (4 13/32")	111 (4 3/8")	102 (4")	93 (3 21/32")	87 (3 13/32")
500 (19 11/16")	186 (7 5/16")	165 (6 1/2")	148 (5 13/32")	135 (5 5/16")	123 (4 13/32")	113 (4 7/16")	105 (4 1/16")
550 (21 21/32")	219 (8 5/8")	195 (7 7/16")	176 (6 15/16")	160 (6 9/32")	146 (5 3/4")	135 (5 5/16")	125 (4 29/32")
600 (23 5/8")	254 (10")	227 (8 15/16")	205 (8 1/16")	187 (7 11/32")	171 (6 23/32")	158 (6 7/32")	147 (5 25/32")

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Tabletop Swivel Fitting


Supplied with



- | | | | |
|--------------------|---|-----------------------|----|
| 1 Short lever | ① | 2 Felt adhesive point | ⑥ |
| 2 Fixing plug | ② | 4 Felt adhesive point | ⑥a |
| 1 Connecting plate | ③ | 2 Plates | ⑦ |
| 2 Sleeve | ④ | 1 Soft roller | ⑧ |
| 2 Support screw | ⑤ | 1 Spacer ring | ⑨ |

Note


Please order 2 casters ⑩ for floor separately.

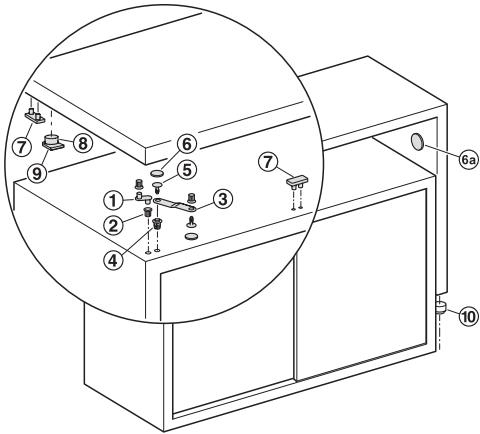

Item No.
646.31.004

6

→ Mini Roller Casters



- > Weight capacity: 40 kg (88 lbs.)
- > Material: Plastic; Color: black

Version	Item No.
hard	661.05.320
soft	661.05.330

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Casters, Feet, Legs, Table Fittings

Tavoflex



soft&silent)))

- > The tabletop is lifted easily using gas-filled struts
- > Integrated soft closing mechanism
- > With safety catch to prevent unintentional closing
- > Side covers prevent fingers from being trapped
- > Cross bar cannot be shortened
- > Screw mounts into pre-drilled series holes: 32 mm (1 1/4")
- > Recommended panel thickness: 16 mm (5/8")
- > Installation width: 698 mm (27 1/2")
- > Weight capacity: 5 kg (11 lbs.)
- > Material: Steel

Finish

silver aluminum, RAL 9006

Item No.

643.12.201



Supplied With

2 Fittings
 Cross bar
 Installation instructions

Note



Gap between a fixed tabletop: min. 6 mm (1/4").

Drilling Pattern

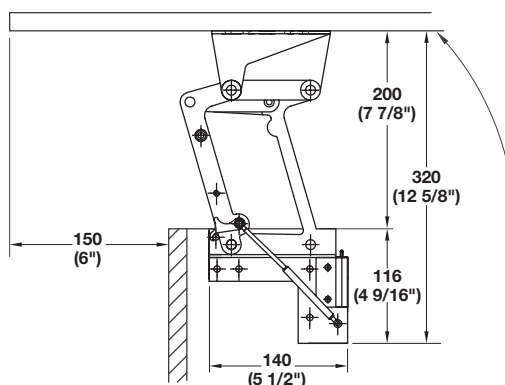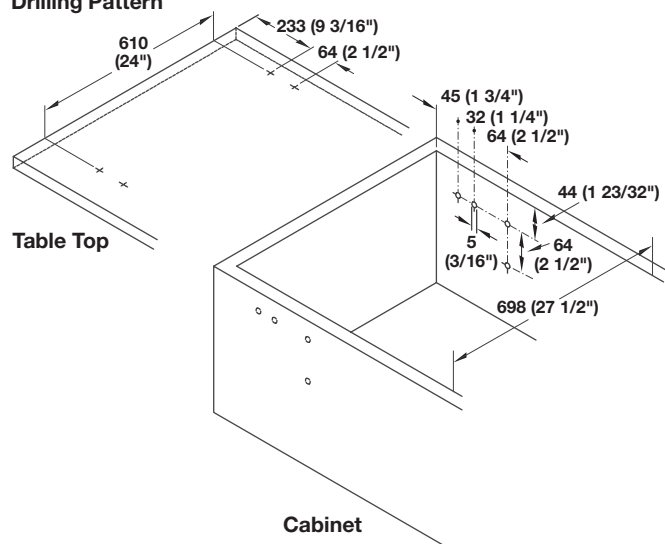

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Linkit Connector

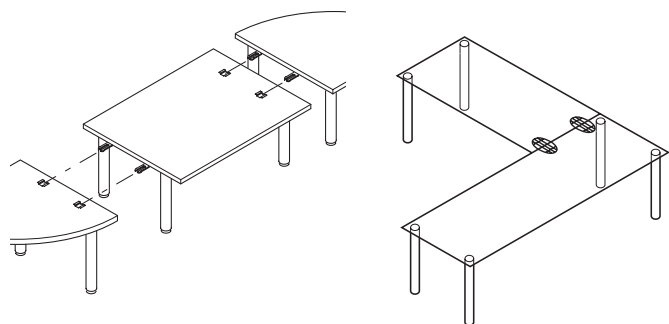

- > For tables and table leaves
- > Low profile, smooth finish
- > Oblong holes allow for alignment of tops
- > Holds tops together flush and stable
- > Mounts to the underside of the tabletop
- > Material: Zinc, powder-coated


Finish

dark gray

Item No.

642.43.300

→ Washer Head Screws



- > For Linkit table connector
- > Material: Steel; Finish: zinc-plated

Length

14 (9/16")

Item No.

013.10.149

Packing




1000 pcs.

29 (1 1/8")

013.10.283

500 pcs.

"Click Catch" Connector

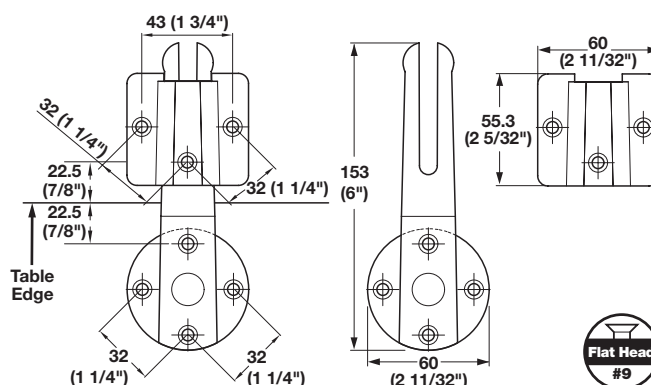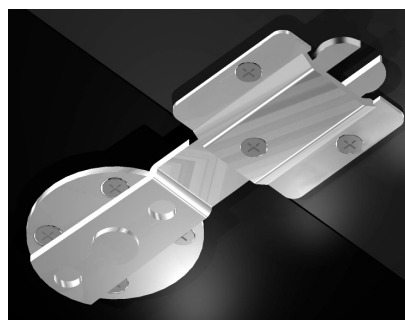

- > For joining free-standing tables or table leaves
- > Clicks together; tools are not required for tightening
- > Extremely thin design will not interfere with leg movement
- > Male piece rotates 360° with stops every 90°
- > Completely concealed under tabletop
- > Material: Steel

Finish

zinc-plated

Item No.


642.42.900

Supplied With

Male piece

Female piece

Cam-it Connector

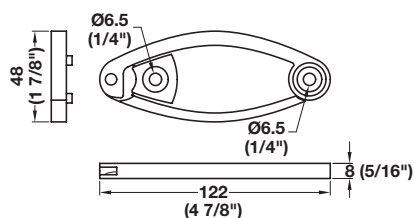

- > Mounts directly to underside of tabletop or desk
- > Modular cam design allows pivoting connector to join panels together quickly and easily
- > Connector can be hidden under the top panel when tables are separated
- > Material: Plastic

Finish

black


Item No.

642.43.310

Supplied With

Drilling template


→ Washer Head Screws



- > For Cam-it table connector
- > Material: Steel; Finish: zinc-plated

Length	Item No.	Packing
14 (9/16")	013.10.149	1000 pcs.
29 (1 1/8")	013.10.283	500 pcs.

Table Connector



- ① Fixed plate
- ② Hook-in plate
- ③ Tabletop edges

- > Screw mounts under tabletop
- > Installation height: 9 mm (3/8")
- > Material: Catch: Plastic; Hook-in plate: Zinc Alloy, bright

Color

gray


Item No.

642.42.920

Supplied With

2 Hook-in parts
2 Catches

→ Peg and Sleeve Connector



- > Presses into hole Ø: 8 mm (5/16")
- > Material: Steel



Finish

yellow chromate

Item No.

642.51.243

Folding Table Leaf Flap Hinge

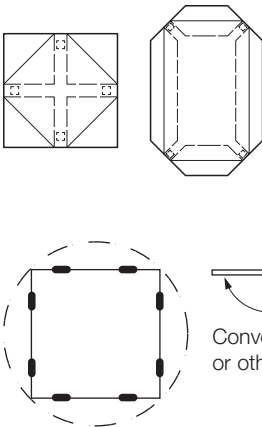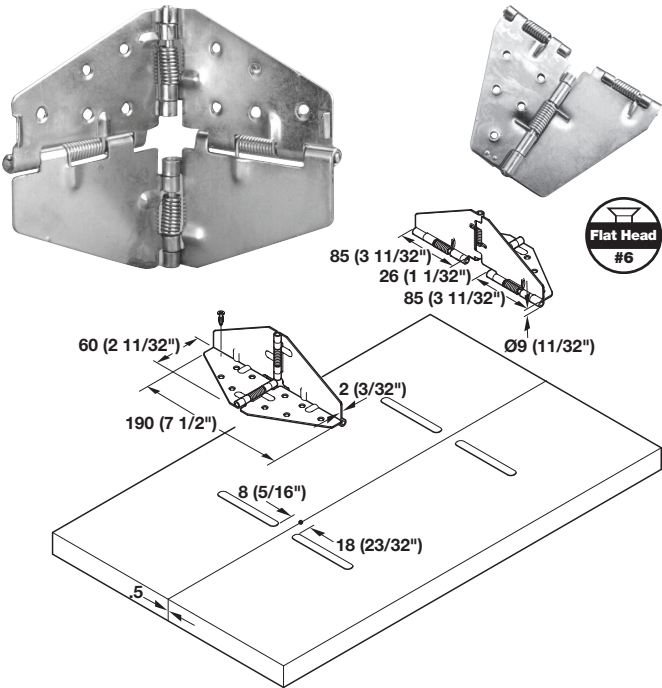

Note
Table leaves are held securely under table. Rotate leaves up (180°) and hinges automatically lock leaves into horizontal position. Flap hinge is designed for relatively light duty applications. Flap should not exceed 203 mm (8") in depth, please conduct your own test. Häfele cannot specify a weight rating.

> Material: Steel

Finish

yellow chromate

Item No.

642.70.515

Note

Hinge is under constant spring tension. Keep fingers clear when operating.

Folding Fittings


→ **Folding Adjustable Worksurface Bracket**




- > For mounting a worksurface to a wall
- > With 3 working positions: 90°, 80° and 70°
- > With release lever to fold and adjust the positions
- > Weight capacity/pair: 30 kg (66 lbs.) evenly distributed
- > Customer is responsible for mounting in suitable material with proper screws
- > Material: Steel; Finish: zinc-plated

A	B	C	D	Top depth max.	Item No.
300 (12")	30 (1 3/16")	200 (7 7/8")	25 (31/32")	406 (16")	287.55.930
400 (15 3/4")	36 (1 7/16")	270 (10 5/8")	32 (1 1/4")	508 (20")	287.55.940


6

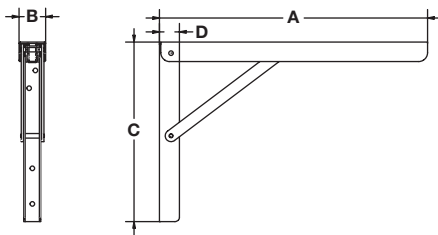


Adjustments



Position 1 = 90°






Position 2 = 80°



Position 3 = 70°




Position 4 = 0°




Functionality

To raise bracket lift support arm and allow to engage at required position.
 To fold down bracket lift support arm and release locking mechanism.

→ **Folding Bracket with Spring**



- > For extending tabletops
- > With release lever to fold the top down
- > Weight capacity/pair: 30 kg (66 lbs.) evenly distributed
- > Customer is responsible for mounting in suitable material with proper screws
- > Recommended top depth: max. 406 mm (16")
- > Material: Steel

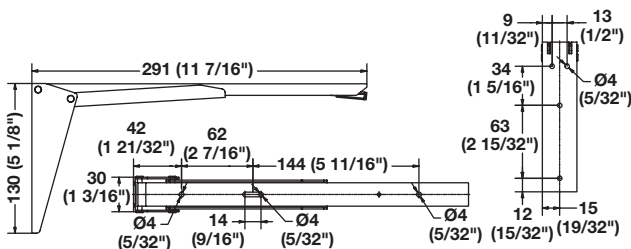

Finish

zinc-plated

Item No.


287.41.951

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Sugatsune LADH 50 Countertop Lift



- > Lift-Assist feature helps to lift the countertop
- > Holds door open at 95°
- > Adds smooth soft close to countertops in restaurants, bars and reception desks to eliminate slamming
- > Easy surface mounted installation
- > Retrofitting is possible
- > Panel thickness: 30–50 mm (1 3/16"–1 31/32")
- > Cut-to-length piano hinge length: 600 mm (23 5/8")
- > Torque range: 309–442 lb
- > Material: Steel/Zinc; Finish: nickel-plated
- Hinge: Plastic; Color: gray

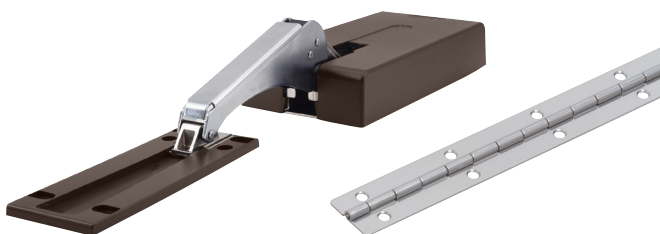


Finish	Item No.
brown	643.02.031
white	643.02.034

Supplied with

Stainless Steel piano hinge
 Mounting instructions

Note


Can be used in pairs, contact Sugatsune tech support for details.

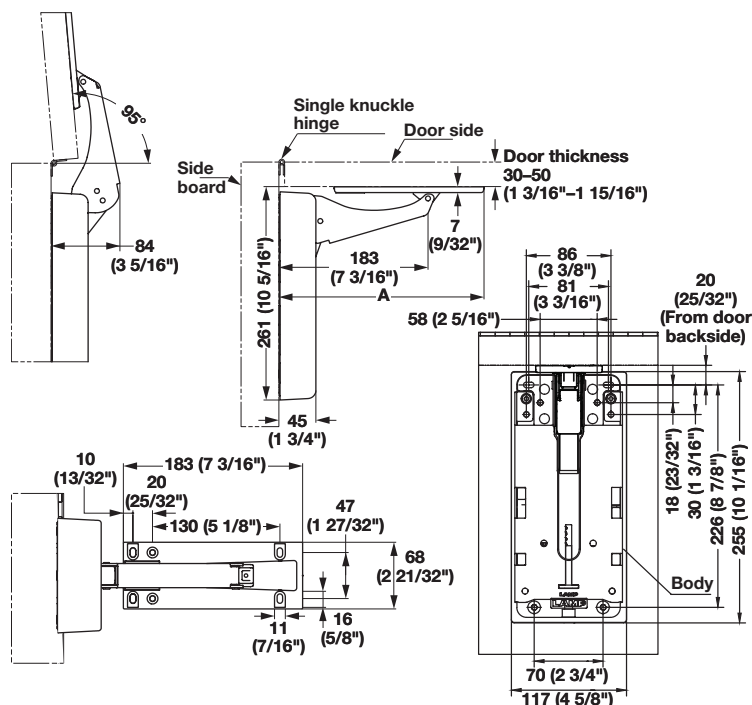

Door Thickness	A
30 (1 3/16")	251 (9 7/8")
50 (2")	226 (8 7/8")

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Drop-Leaf Fitting

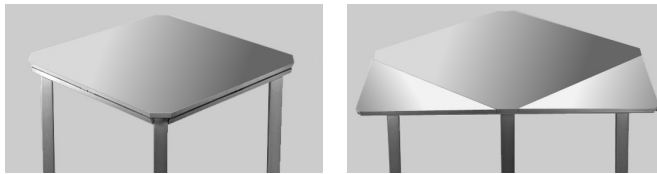

The table can be enlarged and modified.

- > Top leaf depth: max. 250 mm (12")
- > Additional sets should be installed at 500 mm (20") intervals
- > Weight capacity: 15 kg (33 lbs.)
- > Length: Shelf support: 360 mm (14 3/16")
Guide profile: 180 mm (7 1/8")
Flexible hinges: 500 mm (19 3/4")
- > Material: Shelf support and guide profile: Aluminum
Flexible hinges: Plastic, natural
Double ball catch: Brass, unfinished
Stop buffer: Rubber; Color: black

Finish





silver anodized

Item No.




642.40.008

Supplied With

Sliding support
Guide profile
2 Flexible hinges
Double ball catch
Stop buffer

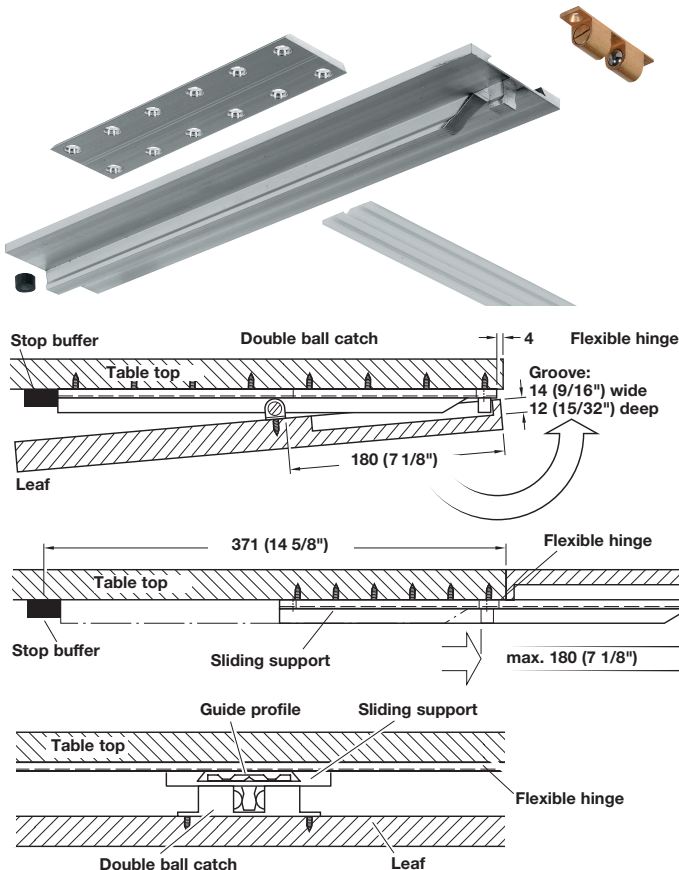

Possible table edge profiles:

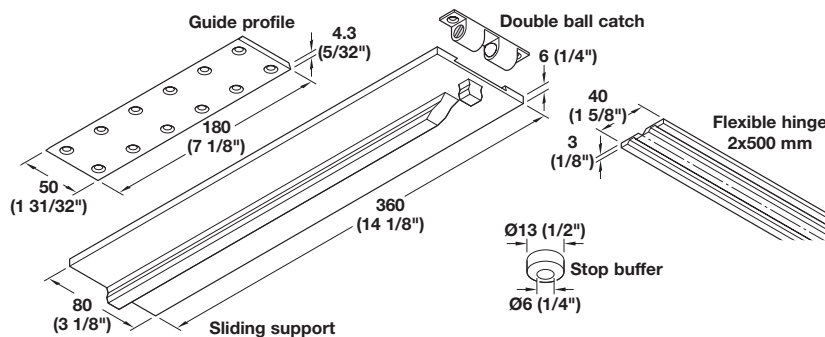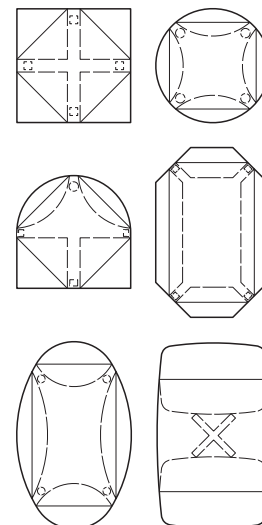


Flat head screws


pages 13.7-13.8, 13.10, 13.13

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Leg Brackets

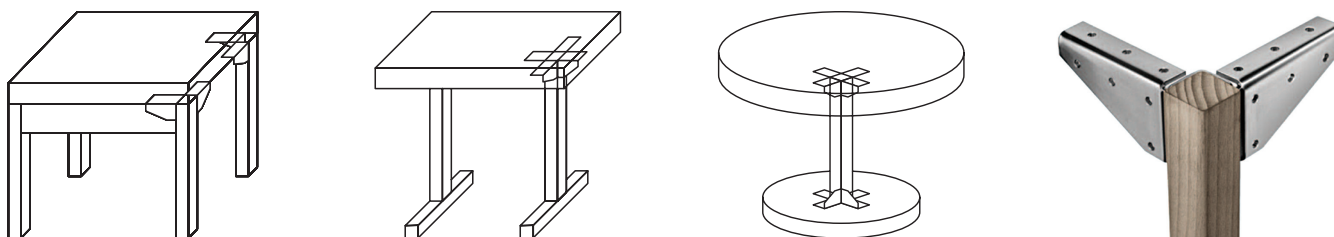

→ Angle Fitting

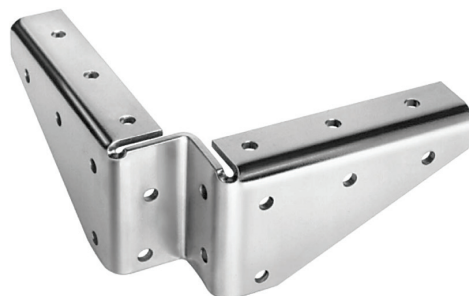


- > With side holes for screw mounting to apron
- > Creates sturdy corner connections for tables, frames, cabinets, work benches, shelving, mobile tables, etc.
- > Material: Steel

Finish


nickel-plated

Item No.

641.01.711

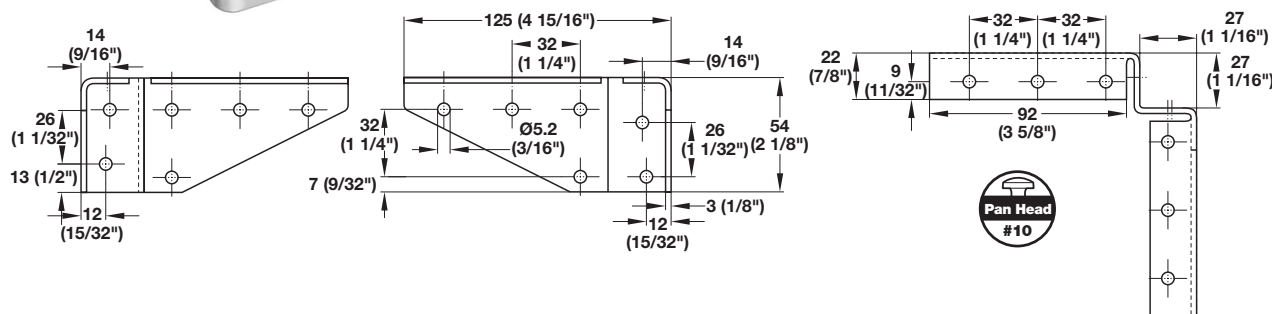

→ Corner Brace



- > Simple/economical attachment of table legs to frame
- > The ends of the brace are set into grooves in frame
- > The table leg is secured using the center hole
- > Material: Steel, galvanized


Item No.

641.00.901

Note

Tables designed using corner braces can be stored, packed and transported in RTA form.

→ Anti-Sag Bar

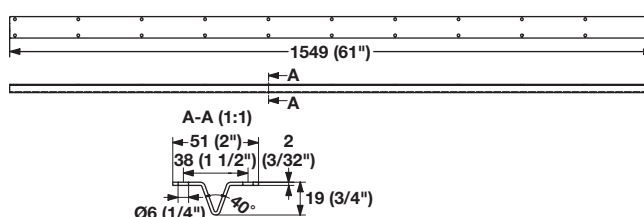

- > For use under tabletops to keep from sagging
- > Length: 1,549 (61'')

Color

black


Item No.

630.46.382

Supplied With

Wood screws

Modesty Panel Clip System Bracket

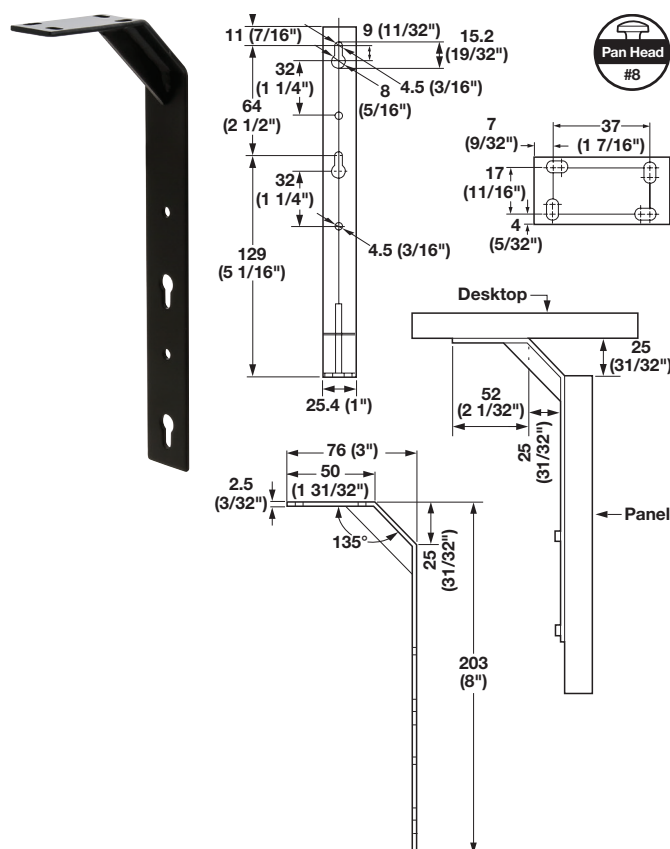


- > Attaches customer supplied metal or wood modesty panels
- > Material: Steel

Color

black epoxy

Item No.


654.34.380

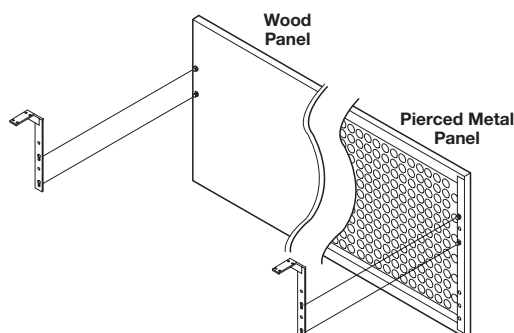

6

Casters, Feet, Legs, Table Fittings

Draw Pull Catches





- > Material: Steel; Color: black

A	B	Wire clamp Ø	Item No.
55 (2 5/32'')	22 (7/8'')	3 (1/8'')	380.53.306
75 (2 15/16'')	30 (1 3/16'')	4 (5/32'')	380.53.315

Note

Order strikes separately.

→ Strikes for Draw Pull Catches




- > Material: Steel; Color: black

Length	Width	Thickness	Item No.
28 (1 1/8'')	13 (1/2'')	1.3 (1/32'')	380.65.306
24 (15/16'')	18 (23/32'')	2.0 (3/32'')	380.65.315


Heavy Duty Turntables

- > 360° rotation on steel ball bearings
- > Quantity of through holes and non-skid pads depends on size
- > Pads can be removed and drilled through if positive attachment is necessary
- > Material: Aluminum

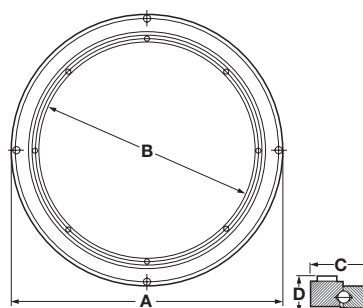

- > Through holes are countersunk with Ø4.5 mm (3/16") screws




A Outer Ø	B Inner Ø	C Width	D Height	Weight capacity	Holes/ inner	Pads/ inner	Holes/ outer	Pads/ outer	Item No.
325 (12 3/4")	256 (10 1/16")	30 (1 3/16")	15 (19/32")	80 kg (175 lbs.)	6	0	0	6	646.20.023
442 (17 1/2")	380 (15")	31 (1 1/4")	20 (25/32")	125 kg (275 lbs.)	6	6	0	8	646.20.024
600 (23 5/8")	520 (20 1/2")	40 (1 9/16")	22 (7/8")	250 kg (550 lbs.)	4	8	0	10	646.20.025
750 (29 5/8")	670 (26 3/8")	40 (1 9/16")	22 (7/8")	400 kg (880 lbs.)	5	10	0	13	646.20.026



- > With threaded inner and outer through holes for "bolting down" of turntable

Outer Ø	Inner Ø	Width	Height	Weight capacity	Holes/inner	Pads/inner	Holes/outer	Pads/outer	Item No.
325 (12 3/4")	265 (10 7/16")	30 (1 3/16")	15 (19/32")	80 kg (175 lbs.)	6 with 1/4"-20	0	6 with 5/6"-18	6 separate	646.20.006

Turntables

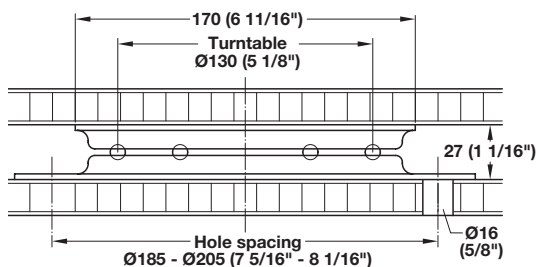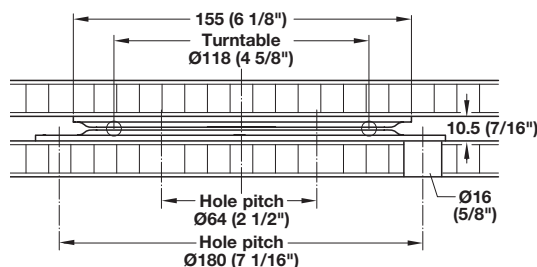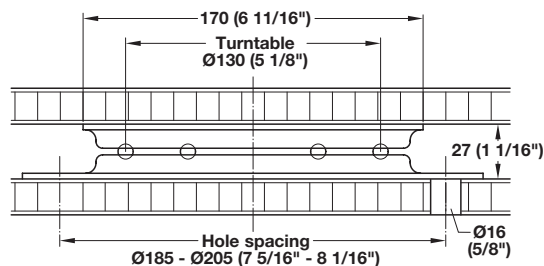

> Economical turntables for small offices, entertainment centers, kitchens, etc.

> 360° rotation
> Ball bearing mounted
> Weight capacity: 100 kg (220 lbs.)
> Material: Steel, unfinished

Item No.

646.15.014

> Weight capacity: 150 kg (330 lbs.)
> Material: Steel, galvanized

Item No.

646.18.908

> Spring loaded
> 90° rotation to the right and left sides
> Ball bearing mounted
> After turning, a steel spring returns the turntable to its original position
> Weight capacity: 100 kg (220 lbs.)
> Material: Steel, unfinished

Item No.

646.15.023

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.